



RECEIVER NR4510UR

$\phi 50 \mu\text{m}$ InGaAs APD RECEIVER FOR 2.5 Gb/s ROSA WITH INTERNAL PRE-AMPLIFIER

DESCRIPTION

The NR4510UR is a InGaAs APD ROSA with an internal pre-amplifier in a receptacle type package designed for SFF/SFP transceiver with LC duplex receptacle. This device is ideal as a receiver for Synchronous Digital Hierarchy (SDH) system, STM-16, ITU-T recommendations.


FEATURES

- Internal pre-amplifier
- Minimum receiver sensitivity $\bar{P}_r = -33 \text{ dBm}$
- Wide operating temperature range $T_c = -40 \text{ to } +85^\circ\text{C}$
- 50Ω differential output
- Small package $\phi 4.6 \text{ mm ROSA (Total length 12.0 mm MAX.)}$
- Based on Telcordia reliability



The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.
Not all devices/types available in every country. Please check with local NEC Compound Semiconductor Devices representative for availability and additional information.

PACKAGE DIMENSIONS (UNIT: mm)

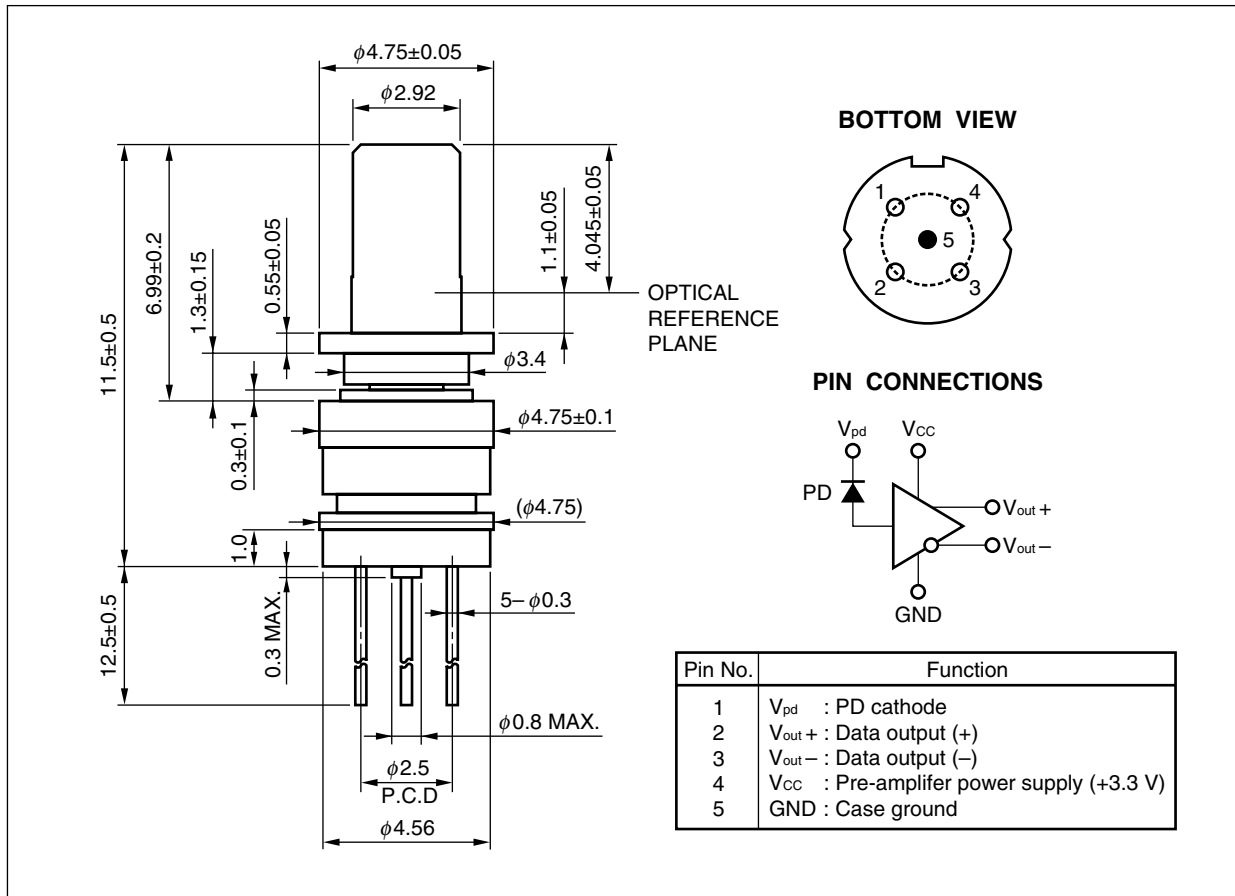

ORDERING INFORMATION

Part Number	Package
NR4510UR	φ4.6 mm ROSA

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Ratings	Unit
Forward Current	I _F	10	mA
Reverse Current	I _R	1.5	mA
Supply Voltage	V _{CC}	4.5	V
Operating Case Temperature	T _C	-40 to +85	°C
Storage Temperature	T _{stg}	-40 to +85	°C
Lead Soldering Temperature	T _{slid}	350 (3 sec.)	°C
Relative Humidity (noncondensing)	RH	85	%

ELECTRO-OPTICAL CHARACTERISTICS

(T_C = -40 to +85°C, V_{CC} = 3.3 V, λ = 1.31 μm, 1.55 μm, unless otherwise specified)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Reverse Break Down Voltage	V _{BR}	I _D = 100 μA	40	60	70	V
Temperature Coefficient of Reverse Breakdown Voltage	δ		0.09		0.15	%/°C
Dark Current	I _D	V _R = 0.9 V _{BR} , T _C = 85°C			500	nA
Minimum Receiver Sensitivity	\bar{P}_r	2.48832 Gb/s, BER = 10 ⁻¹⁰ , PRBS = 2 ²³ -1, ER = 10 dB, λ = 1.31 μm, NRZ, AC-coupled, Mopt		-33	-30	dBm
Maximum Optical Input Power	P _{ovl}	2.48832 Gb/s, BER = 10 ⁻¹⁰ , PRBS = 2 ²³ -1, ER = 10 dB, λ = 1.31 μm, NRZ, AC-coupled, M = 3	-6	-5		dBm
Sensitivity	S	M = 1, λ = 1.31 μm	0.80			A/W
		M = 1, λ = 1.55 μm	0.88			
Cut-off Frequency	f _c	AC-coupled, R _L = 50 Ω, M = 10, -3 dB Ref to 100 MHz	1.6	1.9		GHz
Optical Return Loss	ORL	SMF	27			dB
Transimpedance	Z _t	f = 100 MHz, 50 Ω single-ended, AC-coupled 50 Ω load	1.05	1.4		kΩ
Supply Voltage	V _{CC}		3.15	3.3	3.45	V
Supply Current	I _{CC}				45	mA

InGaAs APD/PD FAMILY

Part Number	Absolute Maximum Ratings		Electro-Optical Characteristics (T _c = 25°C)						Applications	Package
	T _c (°C)	T _{stg} (°C)	Detecting Area Size (μm)	I _D	f _c	S		V _R (V)		
				(nA)	(GHz)	(A/W)	@λ (nm)			
				TYP.	MIN.	TYP.				
NR3470MU-CC	0 to +75	-40 to +85	φ 40	5	7.5	1.00	1 550	5	10 Gb/s: STM-64	17-pin mini-butterfly PD with an Internal pre-amplifier
NR3510UR	-40 to +85	-40 to +85	φ 50	0.1	1.8	0.80	1 310	3.3	2.5 Gb/s: STM-16	PIN ROSA with an Internal pre-amplifier
						0.85	1 550			
NR4270MU-CC	0 to +70	-40 to +85	φ 20	1.2 μA ⁻¹	7.0	0.63 ^{*2}	1 550	0.9 V _{BR}	10 Gb/s: STM-64	17-pin mini-butterfly APD with an Internal pre-amplifier
NR4500BP-CC NR4500CP-CC	0 to +85	-40 to +85	φ 50	-	2.5	0.94	1 310	0.9 V _{BR}	2.5 Gb/s: STM-16	Coaxial APD with an Internal pre-amplifier
						0.96	1 550			
NR4510UR	-40 to +85	-40 to +85	φ 50	-	1.6	0.80	1 310	0.9 V _{BR}	2.5 Gb/s: STM-16	APD ROSA with an Internal pre-amplifier
						0.88	1 550			
NR7500 Series	-40 to +85	-40 to +85	φ 50	0.1	2.5	0.89	1 310	5	2.5 Gb/s: STM-16	Coaxial PD
						0.94	1 550			
NR7800 Series	-40 to +85	-40 to +85	φ 80	0.1	2.5	0.89	1 310	5	≤ 622 Mb/s: STM-4, STM-1	Coaxial PD
						0.94	1 550			
NR8500 Series	-40 to +85	-40 to +85	φ 50	7	1	0.94	1 310	0.9 V _{BR}	≤ 622 Mb/s: STM-4, STM-1	Coaxial APD
						0.96	1 550			
NR8501 Series	-40 to +85	-40 to +85	φ 50	7	2.5	0.94	1 310	0.9 V _{BR}	2.5 Gb/s: STM-16	Coaxial APD
						0.96	1 550			

*1 MAX.

*2 MIN.

REFERENCE

Document Name	Document No.
OPTICAL SEMICONDUCTOR DEVICES FOR FIBEROPTIC COMMUNICATIONS SELECTION GUIDE	PL10161E
Opto-Electronics Devices Pamphlet	PX10160E

- **The information in this document is current as of November, 2003. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products and/or types are available in every country. Please check with an NEC sales representative for availability and additional information.**
 - No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
 - NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC semiconductor products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC or others.
 - Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
 - While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC semiconductor products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment, and anti-failure features.
 - NEC semiconductor products are classified into the following three quality grades:
 "Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.
 "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
 "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
 "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.
- The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.
- (Note)
- (1) "NEC" as used in this statement means NEC Corporation, NEC Compound Semiconductor Devices, Ltd. and also includes its majority-owned subsidiaries.
 - (2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).

M8E 00.4-0110

<p>Caution</p>	<p>GaAs Products</p>	<p>This product uses gallium arsenide (GaAs). GaAs vapor and powder are hazardous to human health if inhaled or ingested, so please observe the following points.</p> <ul style="list-style-type: none"> • Follow related laws and ordinances when disposing of the product. If there are no applicable laws and/or ordinances, dispose of the product as recommended below. <ol style="list-style-type: none"> 1. Commission a disposal company able to (with a license to) collect, transport and dispose of materials that contain arsenic and other such industrial waste materials. 2. Exclude the product from general industrial waste and household garbage, and ensure that the product is controlled (as industrial waste subject to special control) up until final disposal. • Do not burn, destroy, cut, crush, or chemically dissolve the product. • Do not lick the product or in any way allow it to enter the mouth.
-----------------------	----------------------	---

► For further information, please contact

NEC Compound Semiconductor Devices, Ltd. <http://www.ncsd.necel.com/>
 E-mail: salesinfo@ml.ncsd.necel.com (sales and general)
 techinfo@ml.ncsd.necel.com (technical)
 5th Sales Group, Sales Division TEL: +81-44-435-1588 FAX: +81-44-435-1579

NEC Compound Semiconductor Devices Hong Kong Limited
 E-mail: ncsd-hk@elhk.nec.com.hk (sales, technical and general)
 Hong Kong Head Office TEL: +852-3107-7303 FAX: +852-3107-7309
 Taipei Branch Office TEL: +886-2-8712-0478 FAX: +886-2-2545-3859
 Korea Branch Office TEL: +82-2-558-2120 FAX: +82-2-558-5209

NEC Electronics (Europe) GmbH <http://www.ee.nec.de/>
 TEL: +49-211-6503-01 FAX: +49-211-6503-487

California Eastern Laboratories, Inc. <http://www.cel.com/>
 TEL: +1-408-988-3500 FAX: +1-408-988-0279