

General Description

The OCH184 is an integrated Hall effect latched sensor designed for electronic commutation of brush-less DC motor applications. The device using High Voltage process includes an on-chip Hall voltage generator for magnetic sensing, a comparator that amplifies the Hall voltage, and a Schmitt trigger to provide switching hysteresis for noise rejection, and an open-collector output. An internal band-gap regulator is used to provide temperature compensated supply voltage for internal circuits and allows a wide operating supply range.


Features

- Wide operating voltage range: 2.5V~26V
- Operating temperature range: -40°C ~+125°C
- Temperature compensation
- Reverse polarity protection
- Open-Drain pre-driver
- Package: SIP-3L、SOT23-3L

Applications

- Rotor Position Sensing
- Brush-less DC Motor
- Speed measurement
- Revolution counting

Pin Configuration

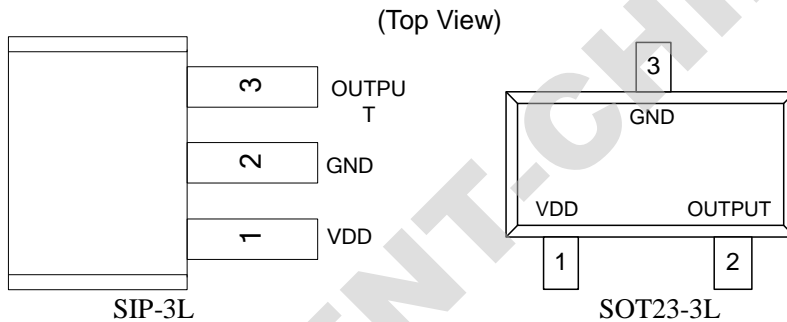

Name	No.		Status	Description
	SIP-3L	SOT23-3L		
VDD	1	1	P	IC Power Supply
GND	2	3	P	IC Ground
OUTPUT	3	2	O	SIP-3L: It is low state during the S magnetic field SOT23-3L: It is low state during the N magnetic field

Application Circuit

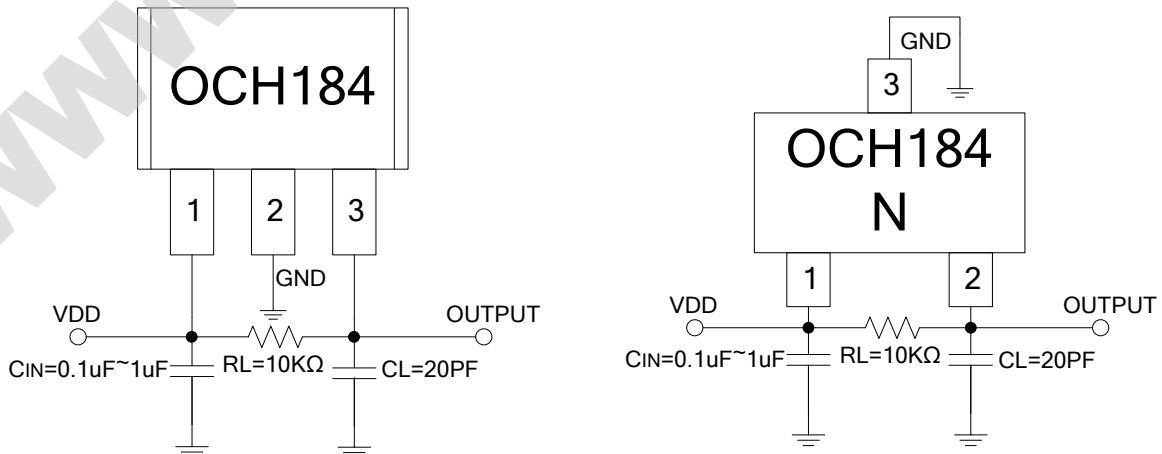


Figure 1, application circuit

Note: C_{IN} is for power stabilization and to strengthen the noise immunity, the recommended capacitance is 0.1~1uF. If the VCC power supply is clean, the C_{IN} can be cancelled.

**Ordering Information**

Part Number	Package Type	Packing Qty	B _{OP} (Gauss)	B _{RP} (Gauss)	Temperature	Eco Plan	Lead
OCH184ME	SIP-3L	1000pcs	28(Typ.)	-28(Typ.)	-40 ~ 125°C	ROHS	Cu
OCH184NWAE	SOT23-3L	3000pcs	28(Typ.)	-28(Typ.)	-40 ~ 125°C	ROHS	Cu

注：想进一步了解产品咨询，请直接点击[申请样品](#)。我们会第一时间联系您！谢谢！

WWW.ORIENT-CHIP.COM