



■ General Description

The OCH2980 is a single-chip solution for driving two-coil brushless direct current (BLDC) fans and motors. The device includes a Hall-effect sensor, dynamic offset correction and two complementary open-drain output drivers with internal Zener diode protection. It is optimized for low start-up voltage.

To help protect the motor coils, the OCH2980 provides Rotor Lock Protection which shuts down output drives if rotor lock is detected. The device automatically re-starts when the rotor lock is removed. Over temperature shutdown provides thermal protection for the device.

The OCH2980 is available in SIP4 package.

■ Features


- Single-Chip solution
- High sensitivity Hall-effect Sensor
- Operating Voltage: 3.5V to 18V
- Average output current up to 600mA
- Built-in Hall sensor and input amplifier
- Rotor Lock Protection (Lock detection, output shutdown and automatic re-start)
- Built-in reverse voltage protection diode
- Built-in Zener protection for output drivers
- Packages: SIP-4L

■ Applications

- Dual-coil BLDC Cooling Motor/Fans
- Low Voltage/ Low Power BLDC Motors
- For 5V/12V Fans/Motor
- Speed Measurement / Revolution Counting

■ Pin Configuration

(Top View)

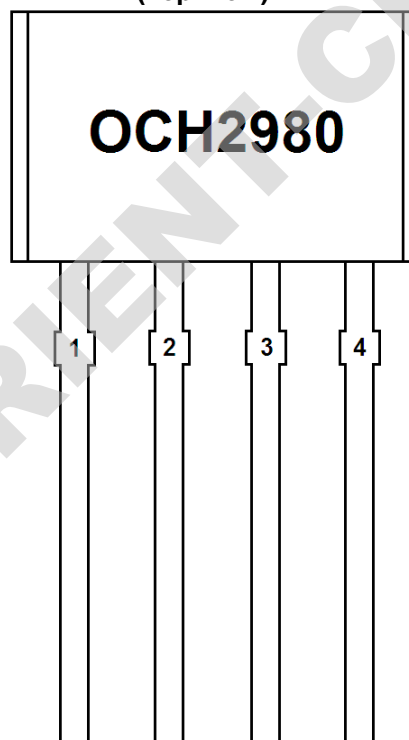

Pin Name	Pin No.	Pin Function
	SIP-4L	
VDD	1	Input Power
DO	2	Output Pin
DOB	3	Output Pin
GND	4	Ground

■ Typical Application Circuit

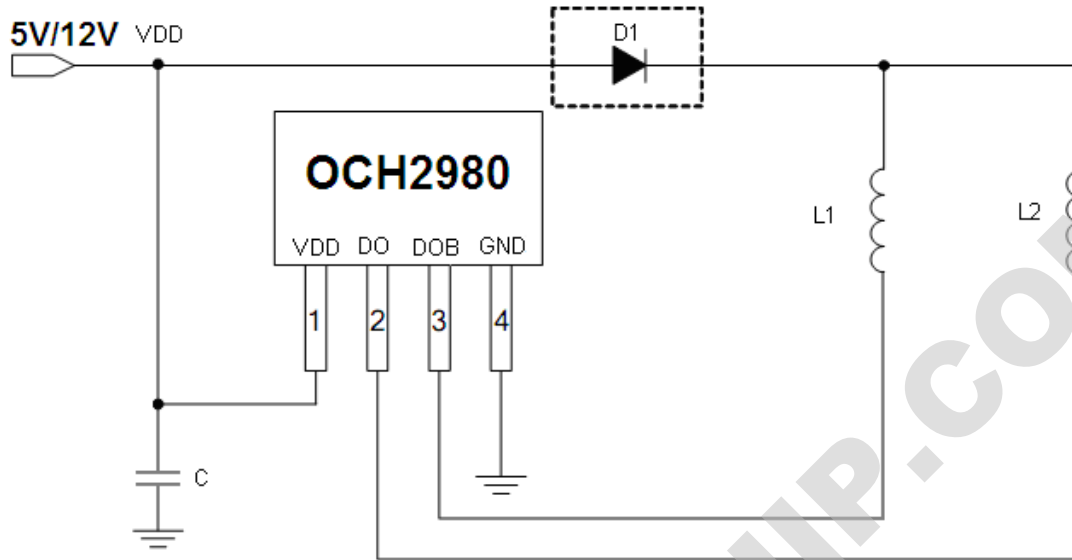


Figure 3, Typical Application Circuit of OCH2980

Notes: 5, Recommended value of C is 1uF/ 50V (E-Cap).

Diode D1 is optional and helps to protect the device and fan coils from reverse power conditions.

The OCH2980 also includes an internal reverse blocking diode at VDD pin.

■ Ordering Information

Part Number	Package Type	Packing Qty	B _{OP} (Gauss)	B _{RP} (Gauss)	Temperature	Eco Plan	Lead
OCH2980MD	SIP-4L	1500pcs/Box	25(Typ.)	-25(Typ.)	-40 ~ 85°C	ROHS	Cu

注：想进一步了解产品咨询，请直接点击[申请样品](#)。我们会第一时间联系您！谢谢！