


# HERMETIC TO-257AA DUAL POWER SCHOTTKY RECTIFIER



**16 Amp, 45 Volt Rating Center-Tap Rectifier**

## FEATURES

- Very Low Forward Voltage
- Low Recovery Charge
- Rugged Package Design, (JEDEC TO-257AA)
- High Efficiency For Low Voltage Supplies
- 45V Blocking @ Rated  $T_{jmax}$
- 50V Repetitive Surge Voltage
- Dual Schottky Rectifier In A Single Isolated Package
- Available Non-Isolated (OM4201NT); Common Cathode Only
- Available Screened To MIL-S-19500, TX, TXV And S Levels

## DESCRIPTION


The OM4201ST has two Schottky barriers arranged in a common cathode configuration and is ideally suited for a full wave output rectifier in low voltage switching power supplies where small size and high reliability are required. Common anode and doubler configurations also available.

## ABSOLUTE MAXIMUM RATINGS ( $T_C = 25^\circ\text{C}$ ) Per Diode

Peak Inverse Voltage.....	45 V
Maximum Average D.C. Output Current.....	8 A
Peak Surge Current (Non-Repetitive, 8.3mS).....	100 A
Peak Reverse Transient Current.....	1.0 A
Storage Temperature Range.....	- 55° C to + 175° C
Junction Operating Temperature Range.....	- 55° C to + 150° C
Package Thermal Resistance, Junction-to-Case.....	2.5° C/W

3.2

## SCHEMATIC

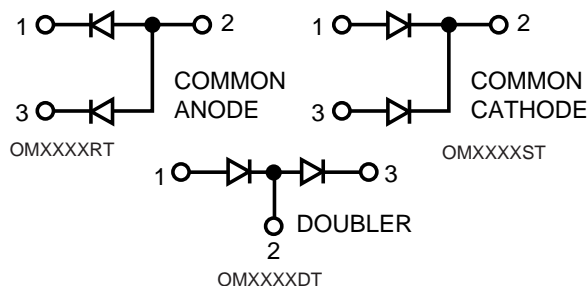


Common cathode is standard. Contact the factory for performance characteristics for common anode and doubler.  
Z-Tab package also available.

**ELECTRICAL CHARACTERISTICS** ( $T_C = 25^\circ\text{C}$ ) (Per Diode)


Characteristic	Symbol	Max.	Unit
Maximum Instantaneous Forward Voltage (1) $I_F = 10\text{A}, T_C = 125^\circ\text{C}$ $I_F = 10\text{A}, T_C = 25^\circ\text{C}$	$V_F$	0.70 0.85	V
Maximum Instantaneous Reverse Current (1) Rated dc Voltage, $T_C = 125^\circ\text{C}$ Rated dc Voltage, $T_C = 25^\circ\text{C}$	$I_R$	15 1.0	mA
Capacitance $V_R = 5.0\text{ V}$	$C_t$	500	pf

(1) Pulse Test: Pulse Width =  $300\mu\text{s}$ , Duty Cycle = 2.0%.


**TYPICAL FORWARD VOLTAGE**

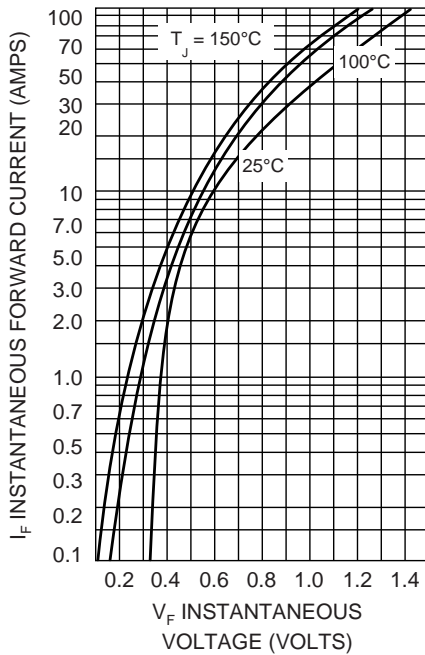

**MECHANICAL OUTLINE**

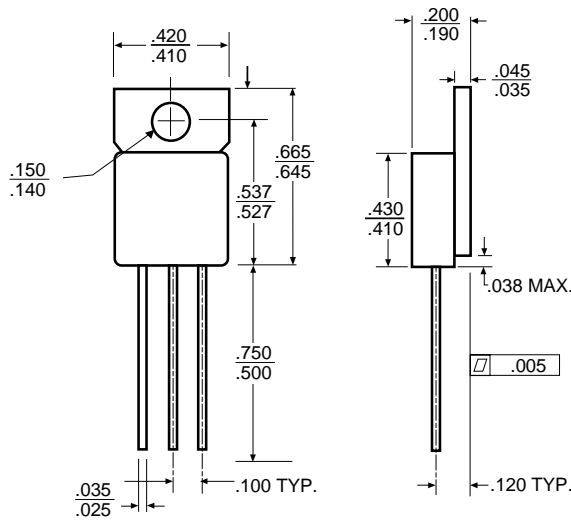

**PIN CONNECTION**

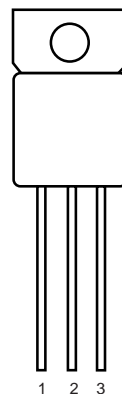

**MAXIMUM REVERSE CURRENT**

