Description

ON6x is a family of OR-NAND circuits consisting of two 3-input OR gates into a 2-input NAND gate.

Logic Symbol

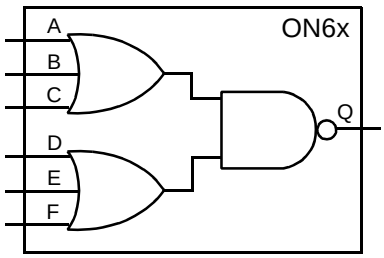

Truth Table

A	B	C	D	E	F	Q
L	L	L	X	X	X	H
X	X	X	L	L	L	H
All other combinations						L

HDL Syntax

Verilog ..... ON6x *inst_name* (Q, A, B, C, D, E, F);

VHDL..... *inst_name*: ON6x port map (Q, A, B, C, D, E, F);

Pin Loading

Pin Name	Equivalent Loads		
	ON62	ON64	ON66
A	1.0	1.0	2.1
B	1.0	1.0	2.1
C	1.0	1.0	2.1
D	1.0	1.0	2.1
E	1.0	1.0	2.1
F	1.0	1.0	2.1

Size And Power Characteristics

Cell	Equivalent Gates	Power Characteristics[a]	
		Static I_{DD} (T_J = 85°C) (nA)	EQL_{pd} (Eq-load)
ON62	5.0	TBD	9.2
ON64	6.0	TBD	9.8
ON66	12.0	TBD	17.0

a. See page 2-15 for power equation.

AMI5HG 0.5 micron CMOS Gate Array

Propagation Delays (ns)

Conditions: T_J = 25°C, V_{DD} = 5.0V, Typical Process

ON62	**Number of Equivalent Loads**		**1**	**4**	**8**	**13**	**17 (max)**
	From: Any Input To: Q	t_{PLH} t_{PHL}	0.50 0.43	0.58 0.56	0.70 0.70	0.84 0.85	0.95 0.96
ON64	**Number of Equivalent Loads**		**1**	**8**	**15**	**22**	**30 (max)**
	From: Any Input To: Q	t_{PLH} t_{PHL}	0.48 0.45	0.59 0.60	0.69 0.73	0.79 0.85	0.90 0.98
ON66	**Number of Equivalent Loads**		**1**	**14**	**28**	**42**	**56 (max)**
	From: Any Input To: Q	t_{PLH} t_{PHL}	0.45 0.47	0.54 0.57	0.64 0.69	0.74 0.81	0.84 0.91

Delay will vary with input conditions. See page 2-17 for interconnect estimates.