



DESCRIPTION

The 2SD1766 is available in SOT-89 Package


FEATURES

- Low $V_{CE(sat)}$, $V_{CE(sat)} = 0.5V$ (typical) ($I_C = 2A$, $I_B = 0.2A$).
- Available in SOT-89 Package

ORDERING INFORMATION

Package Type	Part Number
SOT-89	2SD1766P
	2SD1766Q
	2SD1766R
Note	SPQ: 1,000pcs/Reel
AiT provides all RoHS Compliant Products	

PIN DESCRIPTION



1. BASE
2. COLLECTOR
3. EMITTER



ABSOLUTE MAXIMUM RATINGS

T_A=25°C

V _{CBO} , Collector-Base Voltage	40V
V _{CEO} , Collector-Emitter Voltage	32V
V _{EBO} , Emitter-Base Voltage	5V
I _C , Collector Current	2A
I _{C(Pulse)} ^{NOTE1} , Collector Current	2.5A
P _C , Collector Power Dissipation	0.5W
P _C ^{NOTE2} , Collector Power Dissipation	2W
T _J , Junction Temperature	150°C
T _{STG} , Storage Temperature	-55°C ~150°C

Stresses above may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

NOTE1: P_w=20ms.

NOTE2:40X40X 0.7mm Ceramic board.

ELECTRICAL CHARACTERISTICS


T_A=25°C

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	
Collector-Base Voltage	BV _{CBO}	I _C =50μA	40	-	-	V	
Collector-Emitter Voltage	BV _{CEO}	I _C = 1mA	32	-	-	V	
Emitter-Base Voltage	BV _{EBO}	I _E =50μA	5	-	-	V	
Collector Cutoff Current	I _{CBO}	V _{CB} =20V	-	-	1	uA	
Emitter Cutoff Current	I _{EBO}	V _{EB} =4V	-	-	1	uA	
DC Current Gain	h _{FE}	V _{CE} =3V, I _C =0.5A	P	82	-	180	
			Q	120	-	270	
			R	180	-	390	
Collector-Emitter Saturation Voltage	V _{CE(sat)}	I _C =2A, I _B =0.2A	-	0.5	0.8	V	
Transition Frequency	f _T	V _{CE} =5V, I _E =-500mA, f=100MHz	-	100	-	MHz	
Output Capacitance	C _{ob}	V _{CB} =10V, I _E =0A, f=1MHz	-	30	-	pF	



PACKAGE INFORMATION

Dimension in SOT-89 (Unit: mm)

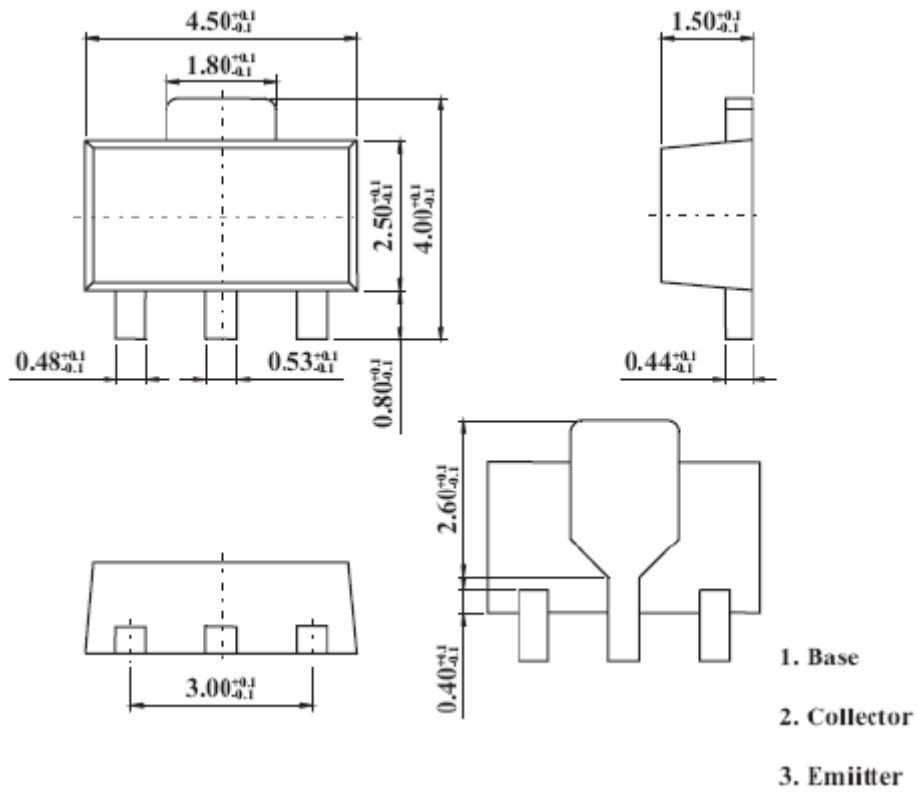



IMPORTANT NOTICE

AiT Components (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Components' integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or server property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Components assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.