

1.5 Amp Solid State Relay

PCS20



US E93379

INPUT PARAMETERS ($T_a = 25^\circ\text{C}$)

	5	4 - 6 VDC
Control Voltage Range	12	9.6 - 14.4 VDC
	24	19.2 - 28.8 VDC
Must Operate Voltage	5	4 VDC
	12	9.6 VDC
	24	1.0 VDC
Must Release Voltage		1.0 VDC
Maximum Input Current		20 mA
Input Resistance	5	270 Ω
	12	750 Ω
	24	1,640 Ω

FEATURES

- Load Current 1.2 or 1.5 Amp
- Load Output Range 48-280VAC
- DC Input: 5 V, 12 V or 24 V
- SIL Printed Circuit Board Mount
- 2,000 VAC Opto-Isolation Between Input and Output
- Zero-Cross or Random Turn-On
- Optional RC Snubber
- RoHS Compliant

OUTPUT PARAMETERS ($T_a = 25^\circ\text{C}$)

Load Voltage Range	48 VAC to 280 VAC	
Load Current Range	0.1 A to 1.5 A	
Max. Surge Current (10ms)	25 Apk	
Max. Leakage Current	1.5 mA	
Max. On-State Voltage Drop	1.5 Vrms	
Max. Turn-On Time	Zero Cross	1/2 Cycle + 1 ms
	Random	1 ms
Max. Turn-Off Time	1/2 Cycle + 1 ms	
Max. Transient Overvoltage	600 Vpk	
Off-State dv/dt	200 V/us	
Max Zero-Cross Overvoltage	± 15 V	
Min. Power Factor	0.5	
Max. I^2t for Fusing (10 ms)	3.1 A ² s	

CHARACTERISTICS

Dielectric Strength (Input to Output)	2,000 VAC, 50 Hz/60 Hz, 1 min
Insulation Resistance	1,000 M Ω at 500 VDC
Vibration Resistance	10 Hz to 55 Hz 1.5 mm DA
Shock Resistance	980 m/s ²

Operating Temperature	-30°C to 80°C
Storage Temperature	-30°C to 100°C
Ambient Humidity	45% to 85% RH
Weight	3.5 g

ORDERING INFORMATION

Example: PCS20 -12D -240A -2 Z T -241

Model: **PCS20**

Control Voltage: **5D**: 5 VDC, **12D**: 12 VDC, **24D**: 24 VDC

Load Voltage: **240A**: 240VAC

Load Current: **1.2**: 1.2 Amp, **1.5**: 1.5 Amp

Switching Type: **Z**: Zero Crossing, **R**: Random Turn-On

RC Snubber: **Nil**: Without RC Snubber, **S***: With RC Snubber

Pin Spacing: **Nil**: 3-3-1mm, **241**: 2-4-1mm

Note: PCS20 with Snubber is not UL Recognized

Box Quantity: 5,000; Inner Box: 50



3220 Commander Drive, Suite 102 Carrollton, TX 75006

Sales: (972) 713-6272

(888) 997-3933

Fax: (972) 735-0964

www.PickerComponents.com

e-mail: sales@pickercomponents.com

Dimensions are listed for reference purposes only.



PCS20 Rev A 8/4/15

Specifications and Availability subject to change without notice.



PRECAUTIONS

1. Maximum Soldering Temperatures: 260°C for a maximum of 10 seconds or 350°C for a maximum of 5 seconds.
2. The SSR case serves to dissipate heat. Install the relays so that they are adequately ventilated. If poor ventilation is unavoidable, the load current must be reduced. Please refer to the curve of "Max. Load current Vs. Ambient Temperature".
3. The input circuitry does not incorporate a circuit protecting the SSR from being damaged due to a reversed connection. Make sure that the polarity and the input and output are correct when connecting.
4. If the output transient voltage exceeds the nominal value a varistor should be mounted on the SSR output terminals in parallel to prevent a breakdown of the triac output junction. The result could be a permanent short of the output. The recommended varistor voltage 470V.
5. When using the relay in phase control applications, at a phase control angle close to 180 degrees the relay's input signal will turn off at the trailing edge of the AC sine wave. The phase delay must be limited to end 200us before AC zero cross. This assures that the relay has time to switch off. Shorter times may cause loss of control at the following half cycle.
6. Please do not use the relay beyond the descriptions in the Data Sheet.
7. Terminal Arrangement


DIMENSIONS (mm/inches)

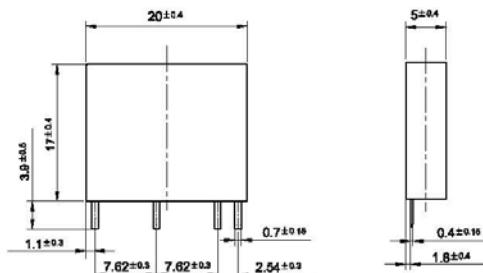

(241): The type with different terminals layout

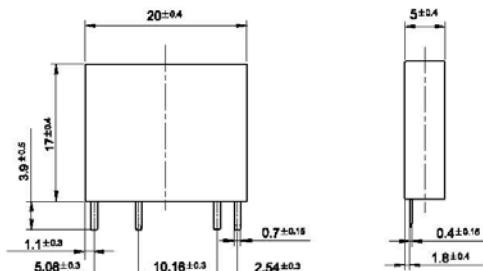


Wiring Diagram

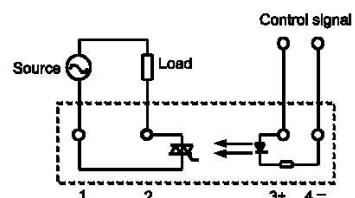


CHARACTERISTIC CURVES

Max. Load Current
vs. Ambient Temperature

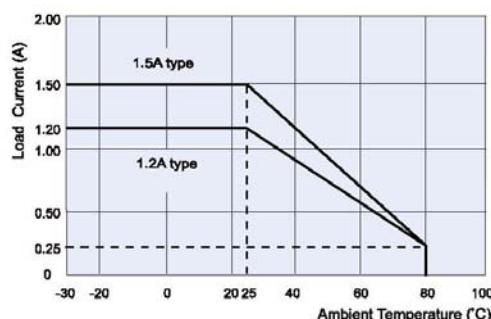

Max. Permissible Non-repetitive
Peak Surge Current vs. Number of Cycles

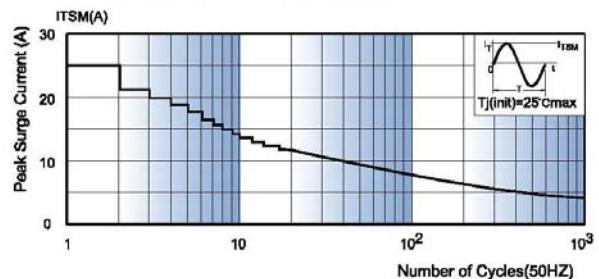

3220 Commander Drive, Suite 102 Carrollton, TX 75006

Sales: (972) 713-6272

(888) 997-3933

Fax: (972)735-0964

www.PickerComponents.com

e-mail: sales@pickercomponents.com

Dimensions are listed for reference purposes only.

PCS20 Rev A 8/4/15

Specifications and Availability subject to change without notice.

2 of 2