

January 7, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com

AXIAL LEADED HERMETICALLY SEALED HIGH VOLTAGE FAST RECTIFIER DIODE

QUICK REFERENCE DATA


- Low reverse recovery time
- Very low leakage current
- Glass passivated for hermetic sealing
- Avalanche capability
- Soft, non-snap off, recovery characteristics

- $V_R = 5 - 7.5kV$
- $I_F = 92mA$
- $t_{rr} = 250ns$
- $I_R = 0.03\mu A$

ABSOLUTE MAXIMUM RATINGS (@ 25°C unless otherwise specified)

	Symbol	PFM50	PFM75	Unit
Working reverse voltage	V_{RWM}	5000	7500	V
Repetitive reverse voltage	V_{RRM}	5650	8500	V
Surge reverse voltage	V_{RSM}	5650	8500	V
Average forward current (@ 55°C in oil)	$I_{F(AV)}$	← 92 →	→	mA
Repetitive surge current (@ 55°C in oil, lead length 0.375")	I_{FRM}	← 1.0 →	→	A
Non-repetitive surge current ($t_p = 8.3mS$, @ V_R & T_{jmax})	I_{FSM}	← 2.0 →	→	A
Storage temperature range	T_{STG}	← -65 to +150 →		°C
Operating temperature range	T_{OP}	← -65 to +150 →		°C

MECHANICAL

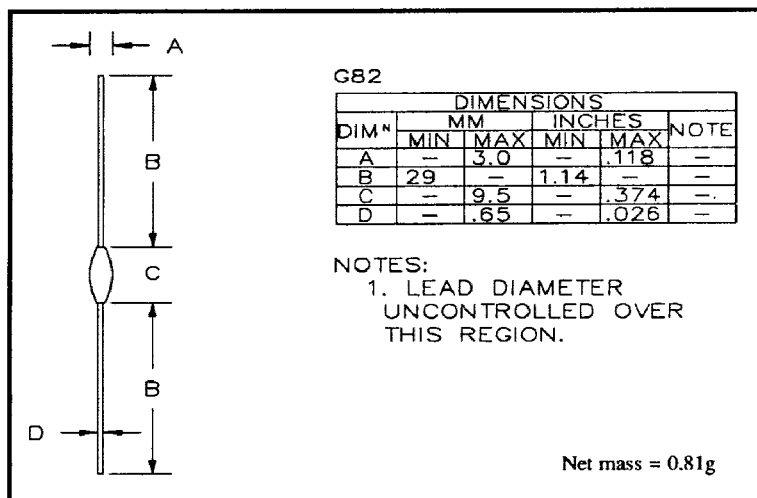

January 7, 1998

CHARACTERISTICS (@ 25°C unless otherwise specified)

	Symbol	PFM50	PFM75	Unit
Average forward current max. (pcb mounted; $T_A = 55^\circ\text{C}$) for sine wave	$I_{F(AV)}$	← 47 →		mA
	$I_{F(AV)}$	← 50 →		mA
Average forward current max. (unstirred oil at 55°C) for sine wave	$I_{F(AV)}$	← 84 →		mA
	$I_{F(AV)}$	← 92 →		mA
I^2t for fusing ($t = 8.3\text{ms}$) max.	I^2t	← 0.017 →		A^2S
Forward voltage drop max. @ $I_F = 25\text{mA}$, $T_j = 25^\circ\text{C}$	V_F	← 12.5 →		V
Reverse current max. @ V_{RWM} , $T_j = 25^\circ\text{C}$ @ V_{RWM} , $T_j = 100^\circ\text{C}$	I_R	← 0.03 →		μA
	I_R	← 3.00 →		μA
Reverse recovery time max. 50mA I_F , 100mA I_R , 25mA I_{RR} .	t_{rr}	← 250 →		nS
Junction capacitance typ. @ $V_R = 5\text{V}$, $f = 1\text{MHz}$	C_j	← 0.75 →		ρF
Thermal resistance - junction to oil Stirred oil	$R_{\theta JO}$	← 48 →		$^\circ\text{C/W}$
	$R_{\theta JO}$	← 64 →		$^\circ\text{C/W}$
Thermal resistance - junction to amb. on 0.06" thick pcb. 1oz copper.	$R_{\theta JA}$	← 160 →		$^\circ\text{C/W}$

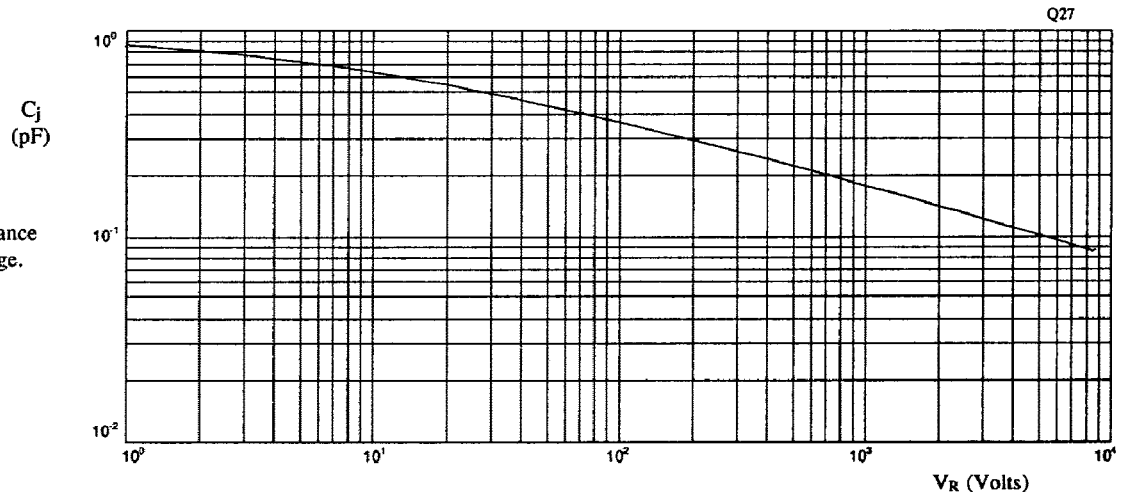


Fig 1 Junction capacitance against reverse voltage.

January 7, 1998

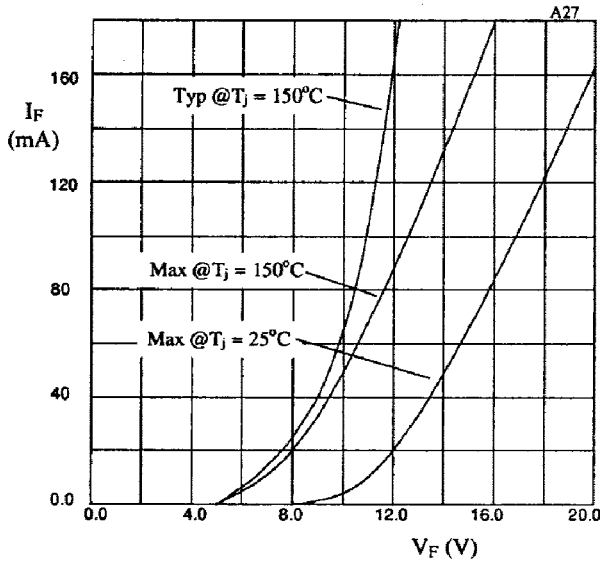


Fig 2. Forward voltage drop as a function of forward current.

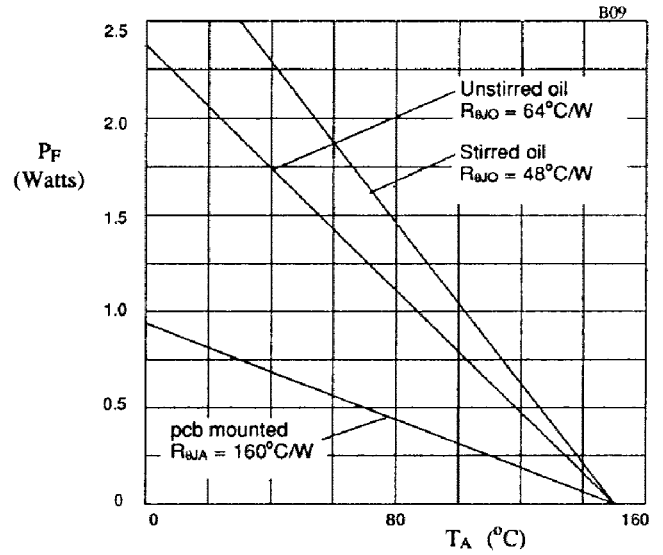


Fig 3. Power derating in air and oil.

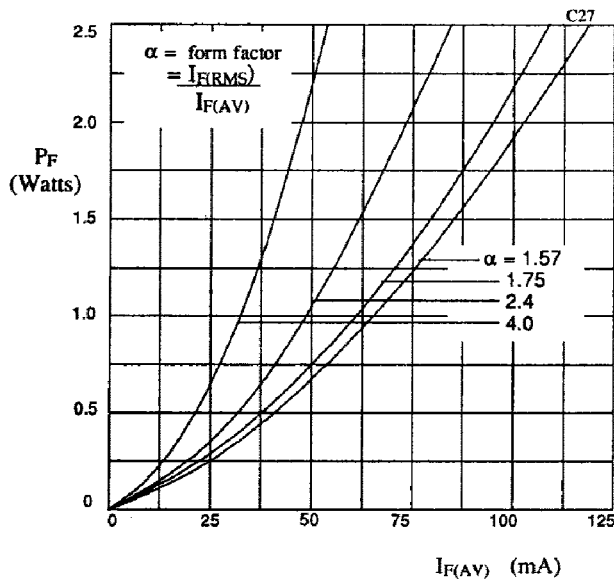


Fig 4. Forward power dissipation as a function of forward current, for sinusoidal operation.

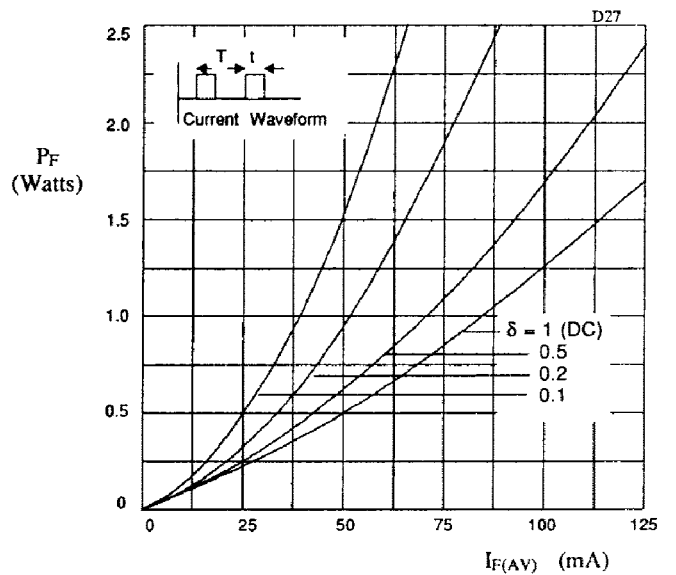


Fig 5. Forward power dissipation as a function of forward current, for square wave operation.