


Intellimod™ Module

Three Phase + Brake
IGBT Inverter Output
200 Amperes/600 Volts

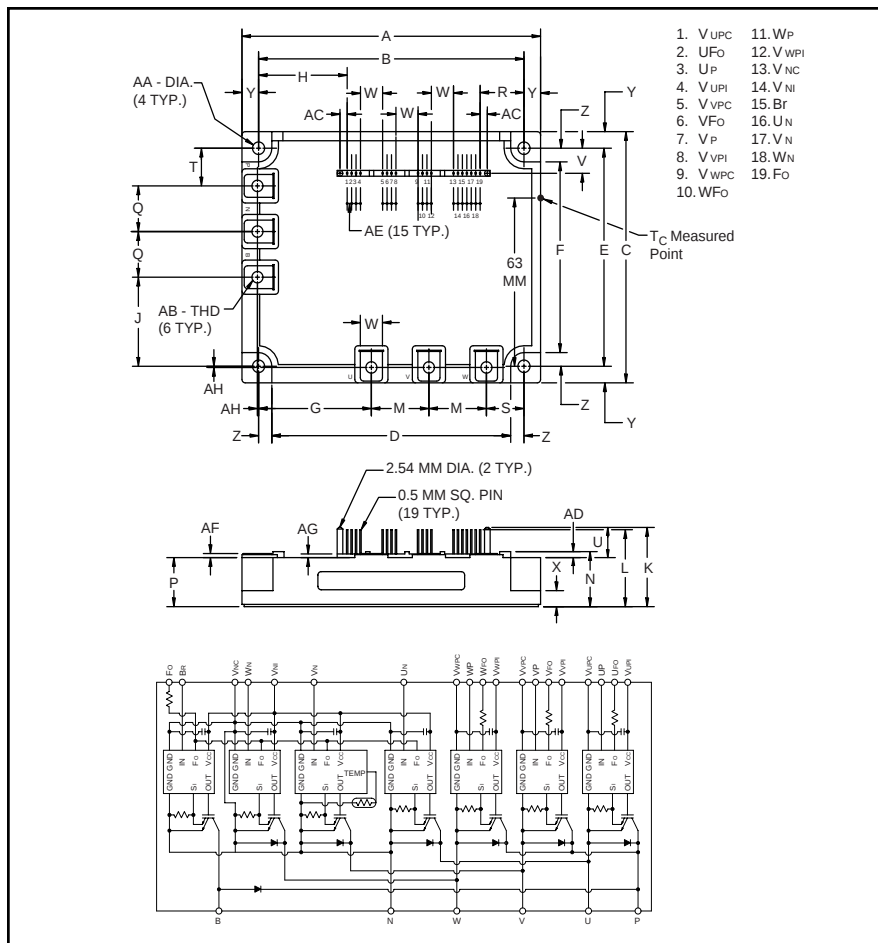

Description:

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

Features:

- ☐ Complete Output Power Circuit
- ☐ Gate Drive Circuit
- ☐ Protection Logic
 - Short Circuit
 - Over Current
 - Over Temperature
 - Under Voltage
- ☐ Low Loss Using 4th Generation IGBT Chip

Applications:

- ☐ Inverters
- ☐ UPS
- ☐ Motion/Servo Control
- ☐ Power Supplies

Ordering Information:

Example: Select the complete part number from the table below -i.e. PM200RSD060 is a 600V, 200 Ampere Intellimod™ Intelligent Power Module.

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	5.31±0.04	135.0±1.0
B	4.74±0.02	120.5±0.5
C	4.33±0.04	110.0±1.0
D	4.27	10.5
E	3.76±0.02	95.5±0.5
F	3.29	83.5
G	2.01	51.0
H	1.602	40.68
J	1.56	39.5
K	1.37	34.7
L	1.33	33.7
M	1.02	26.0
N	0.95 +0.06/-0.0	24.1 +1.5/-0.0
P	0.85	21.5
Q	0.79	20.0
R	0.780	19.82

Dimensions	Inches	Millimeters
S	0.69	17.5
T	0.65	16.5
U	0.52	13.2
V	0.43	11.0
W	0.39	10.0
X	0.30	7.7
Y	0.285	7.25
Z	0.24	6.0
AA	0.22 Dia.	Dia. 5.5
AD	Metric M5	M5
AC	0.128	3.22
AD	0.10	2.6
AE	0.08	2.0
AF	0.07	1.8
AG	0.06	1.6
AH	0.02	0.5

Type	Current Rating Amperes	V _{CES} Volts (x 10)
PM	200	60



Intellimod™ Module

Three Phase + Brake IGBT Inverter Output

200 Amperes/600 Volts

Absolute Maximum Ratings, T_j = 25°C unless otherwise specified

Characteristics	Symbol	PM200RSD060	Units
Power Device Junction Temperature	T _j	-20 to 150	°C
Storage Temperature	T _{stg}	-40 to 125	°C
Case Operating Temperature	T _C	-20 to 100	°C
Mounting Torque, M5 Mounting Screws	—	31	in-lb
Mounting Torque, M5 Main Terminal Screws	—	31	in-lb
Module Weight (Typical)	—	920	Grams
Supply Voltage Protected by OC and SC (V _D = 13.5 - 16.5V, Inverter Part) T _j = 125°C	V _{CC(prot.)}	400	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal	V _{ISO}	2500	Volts

Collector-Emitter Voltage ($V_D = 15V, V_{CIN} = 15V$)	V_{CES}	600	Volts
Collector Current, $\pm$ ($T_C = 25^\circ C$)	I_C	200	Amperes
Peak Collector Current, $\pm$ ($T_C = 25^\circ C$)	I_{CP}	400	Amperes
Supply Voltage (Applied between P - N)	V_{CC}	400	Volts
Supply Voltage, Surge (Applied between P - N)	$V_{CC(surge)}$	500	Volts
Collector Dissipation ($T_C = 25^\circ C$)	P_C	595	Watts

Collector-Emitter Voltage ($V_D = 15V, V_{CIN} = 15V$)	V_{CES}	600	Volts
Collector Current, $\pm$ ($T_C = 25^\circ C$)	I_C	75	Amperes
Peak Collector Current, $\pm$ ($T_C = 25^\circ C$)	I_{CP}	150	Amperes
FWDi Rated DC Reverse Voltage ($T_C = 25^\circ C$)	$V_{R(DC)}$	600	Volts
FWDi Forward Current ($T_C = 25^\circ C$)	I_F	75	Amperes
Collector Dissipation ($T_C = 25^\circ C$)	P_C	312	Watts

Supply Voltage Applied between (V_{UP1} - V_{UPC} , V_{VP1} - V_{VPC} , V_{WP1} - V_{WPC} , V_{N1} - V_{NC})	V_D	20	Volts
Input Voltage Applied between (U_P - V_{UPC} , V_P - V_{VPC} , W_P - V_{WPC} , U_N - V_N - W_N - B_r - V_{NC})	V_{CIN}	20	Volts
Fault Output Supply Voltage (Applied between F_O and V_C)	V_{FO}	20	Volts
Fault Output Current (U_{FO} , V_{FO} , W_{FO} , F_O)	I_{FO}	20	mA

PM200RSD060
Intellimod™ Module
Three Phase + Brake IGBT Inverter Output
200 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
IGBT Inverter Sector						
Collector Cutoff Current	I _{CES}	V _{CE} = V _{CES} , T _j = 25°C, V _D = 15V, V _{CIN} = 15V	—	—	1.0	mA
		V _{CE} = V _{CES} , T _j = 125°C, V _D = 15V, V _{CIN} = 15V	—	—	10	mA
Diode Forward Voltage	V _{EC}	-I _C = 200A, V _D = 15V, V _{CIN} = 15V	—	2.2	3.3	Volts
Collector-Emitter Saturation Voltage	V _{CE(sat)}	V _D = 15V, V _{CIN} = 0V, I _C = 200A, T _j = 25°C	—	1.70	2.3	Volts
		V _D = 15V, V _{CIN} = 0V, I _C = 200A, T _j = 125°C	—	1.70	2.3	Volts
Inductive Load Switching Times	t _{on}	V _D = 15V, V _{CIN} = 0 ~ 15V V _{CC} = 300V, I _C = 200A T _j = 125°C	0.4	0.8	2.0	μS
	t _{rr}		—	0.15	0.3	μS
	t _{C(on)}		—	0.4	1.0	μS
	t _{off}		—	2.0	2.9	μS
	t _{C(off)}		—	0.6	1.2	μS
IGBT Brake Sector						
Collector Cutoff Current	I _{CES}	V _{CE} = V _{CES} , T _j = 25°C, V _D = 15V, V _{CIN} = 15V	—	—	1.0	mA
		V _{CE} = V _{CES} , T _j = 125°C, V _D = 15V, V _{CIN} = 15V	—	—	10	mA
FWDi Forward Voltage	V _{FM}	I _F = 75A	—	2.2	3.3	Volts
Collector-Emitter Saturation Voltage	V _{CE(sat)}	V _D = 15V, V _{CIN} = 0V, I _C = 75A, T _j = 25°C	—	2.35	2.80	Volts
		V _D = 15V, V _{CIN} = 0V, I _C = 75A, T _j = 125°C	—	2.55	3.05	Volts

PM200RSD060

Intellimod™ Module

Three Phase + Brake IGBT Inverter Output

200 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

haracteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Control Sector						
Over Current Trip Level Inverter Part ($V_D = 15\text{V}$)	OC	$T_j = -20^\circ\text{C}$	—	—	690	Amperes
		$T_j = 25^\circ\text{C}$	351	413	570	Amperes
		$T_j = 125^\circ\text{C}$	310	—	—	Amperes
Over Current Trip Level Brake Part	OC	$-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $V_D = 15\text{V}$	115	161	—	Amperes
Short Circuit Trip Level Inverter Part	SC	$-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $V_D = 15\text{V}$	—	560	—	Amperes
Short Circuit Trip Level Brake Part			—	241	—	Amperes
Over Current Delay Time	$t_{\text{off}}(\text{OC})$	$V_D = 15\text{V}$	—	10	—	μS
Over Temperature Protection ($V_D = 15\text{V}$)	OT	Trip Level	111	118	125	$^\circ\text{C}$
	OT_R	Reset Level	—	100	—	$^\circ\text{C}$
Supply Circuit Under Voltage Protection ($-20 \leq T_j \leq 125^\circ\text{C}$)	UV	Trip Level	11.5	12.0	12.5	Volts
	UV_R	Reset Level	—	12.5	—	Volts
Circuit Current	I_D	$V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$, $V_{N1}-V_{\text{NC}}$	—	60	82	mA
		$V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$, $V_{\text{XP1}}-V_{\text{XPC}}$	—	15	20	mA
Thermal Voltage ON	$V_{\text{th}}(\text{on})$	Applied between	1.2	1.5	1.8	Volts
Thermal Voltage OFF	$V_{\text{th}}(\text{off})$	$U_P, V_P, W_P, U_N, V_N, W_N, B_r-V_{\text{NC}}$	1.7	2.0	2.3	Volts
Input ON Threshold Voltage	$V_{\text{CIN}}(\text{on})$	Applied between	—	—	0.8	Volts
Input OFF Threshold Voltage	$V_{\text{CIN}}(\text{off})$	$U_P, V_P, W_P, U_N, V_N, W_N, B_r-V_{\text{NC}}$	4.0	—	—	Volts
Fault Output Current*	$I_{\text{FO}}(\text{H})$	$V_D = 15\text{V}$, $V_{\text{FO}} = 15\text{V}$	—	—	0.01	mA
	$I_{\text{FO}}(\text{L})$	$V_D = 15\text{V}$, $V_{\text{FO}} = 15\text{V}$	—	10	15	mA
Minimum Fault Output Pulse Width*	t_{FO}	$V_D = 15\text{V}$	1.0	1.8	—	mS

*Fault output is given only when the internal OC, SC, OT and UV protections schemes of either upper or lower devide operate to protect it.



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM200RSD060
Intellimod™ Module
Three Phase + Brake IGBT Inverter Output
200 Amperes/600 Volts

Thermal Characteristics

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	Each IGBT	—	—	0.21	°C/Watt
Inverter Part	$R_{th(j-c)F}$	Each FWDi	—	—	0.35	°C/Watt
	$R_{th(j-c')Q}$	Each IGBT*	—	—	0.13**	°C/Watt
	$R_{th(j-c')F}$	Each FWDi*	—	—	0.21**	°C/Watt
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	Each IGBT	—	—	0.40	°C/Watt
Brake Part	$R_{th(j-c)F}$	Each FWDi	—	—	1.10	°C/Watt
	$R_{th(j-c')Q}$	Each IGBT*	—	—	0.27**	°C/Watt
	$R_{th(j-c')F}$	Each FWDi*	—	—	0.47**	°C/Watt
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module, Thermal Grease Applied	—	—	0.018	°C/Watt

* T_C measured point is just under chip.

**If you use this value, $R_{th(f-a)}$ should be measured just under the chips.

Recommended Conditions for Use

Characteristic	Symbol	Condition	Value	Units
Supply Voltage	V_{CC}	Applied across P-N Terminals	0 ~ 400	Volts
Control Supply Voltage***	V_D	Applied between V_{UP1} - V_{UPC} , V_{N1} - V_{NC} , V_{VP1} - V_{VPC} , V_{WP1} - V_{WPC}	15 ± 1.5	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between	0 ~ 0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$	U_P , V_P , W_P , U_N , V_N , W_N , B_r - V_{NC}	4.0 ~ V_D	Volts
PWM Input Frequency	f_{PWM}	Using Application Circuit	5 ~ 20	kHz
Minimum Dead Time	t_{DEAD}	Input Signal	≥ 2.0	μs
		$I_F = 12mA$	≥ 2.5	μs

*** With ripple satisfying the following conditions: dv/dt swing ≤ ±5V/μs, Variation ≤ 2V peak to peak.


PM200RSD060

Intellimod™ Module


Three Phase + Brake IGBT Inverter Output

200 Amperes/600 Volts


SATURATION VOLTAGE CHARACTERISTICS (TYPICAL) (INVERTER PART)

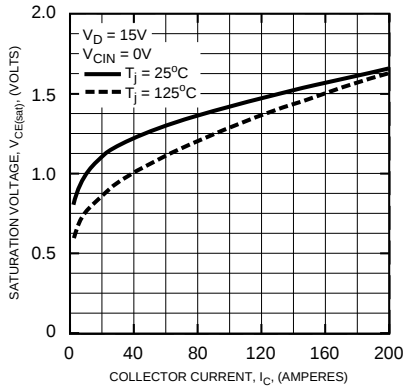


DIODE FORWARD CHARACTERISTICS (INVERTER PART)

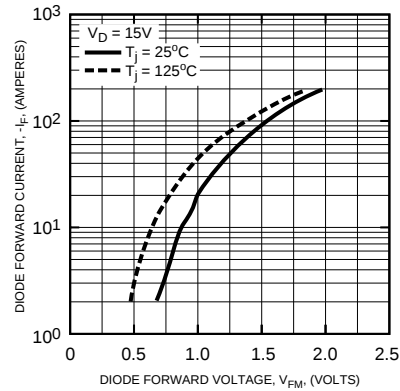


REVERSE RECOVERY CURRENT VS. COLLECTOR CURRENT (TYPICAL)

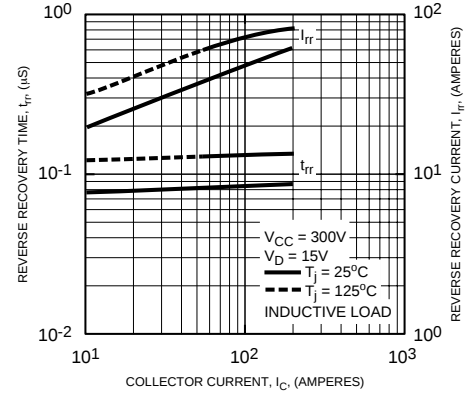

SWITCHING LOSS CHARACTERISTICS

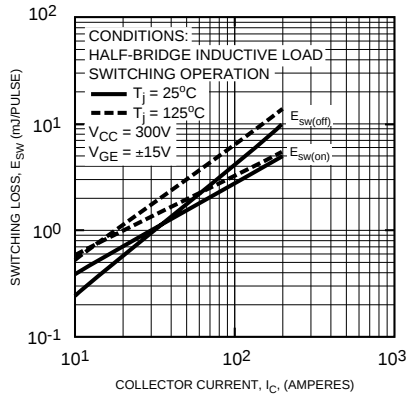

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT & FWDi - INVERTER PART)

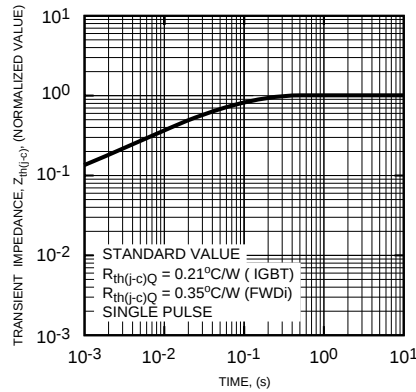

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT & FWDi - BRAKE PART)

