



**Octal Short Haul T1/E1/J1 Low Latency Transport Line Interface**

www.DataSheet4U.com

- Generates E1 pulses compliant to G.703 recommendations.
- Provides line outputs that are current limited and may be tristated for protection or use in redundant applications.
- Provides a digital phase locked loop for generation of a low jitter transmit clock complying with all jitter attenuation, jitter transfer, and residual jitter specifications of AT&T TR 62411 and ETSI TBR 12 and TBR 13.
- Accepts either dual rail or single rail DS-1/E1 signals or parallel data from the SBI/SBI TR interface.
- Performs B8ZS or AMI encoding when processing a single rail or SBI/SBI TR-sourced DS-1 signal and HDB3 or AMI encoding when processing a single rail or SBI/SBI TR-sourced E1 signal.
- Provides a programmable depth FIFO buffer for jitter attenuation, rate conversion, and latency optimization in the transmit path.

**GENERAL**


- Provides an 8-bit microprocessor bus interface for configuration, control, and status monitoring.
- Provides a hardware-only (no microprocessor) mode in which configuration data is read from an SPI-compatible serial PROM. The PROM interface can be cascaded such that multiple OCTLIU ST devices can be configured simultaneously from a single PROM.
- Supports line and system side diagnostic loopbacks.
- Provides an IEEE 1149.1 (JTAG) compliant Test Access Port (TAP) and controller for boundary scan test.
- Implemented in low power 3.3 V tolerant 1.8/3.3 V CMOS technology.
- Available in a high-density 288-pin Tape-SBGA package with a -40 °C to +85 °C Industrial temperature operating range.

**APPLICATIONS**


- Metro Optical Access Equipment.
- Edge Router Line Cards.
- Multi-service ATM Switch Line Cards.
- 3G Base Wireless Equipment.
- Digital Private Branch Exchanges (PBX).
- Digital Access Cross-Connect Systems (DACs) and Electronic DSX Cross-Connect Systems (EDSX).

**TYPICAL APPLICATIONS**


**T1/E1 FRAMER/TRANCEIVER**

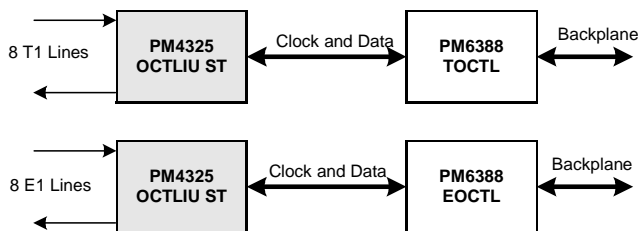

**VOICE GATEWAY**

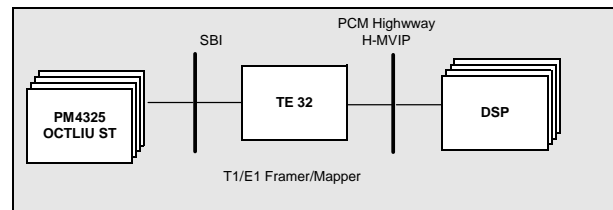

**SINGLE MAGNETIC LINE PROTECTON**

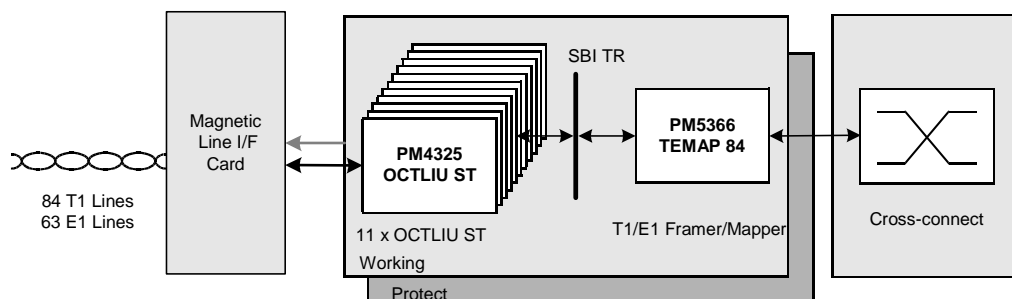

Head Office:  
 PMC-Sierra, Inc.  
 8555 Baxter Place  
 Burnaby, B.C. V5A 4V7  
 Canada  
 Tel: +1.604.415.6000  
 Fax: +1.604.415.6200

To order documentation,  
 send email to:  
 document@pmc-sierra.com  
 or contact the head office,  
 Attn: Document Coordinator

All product documentation is available on  
 our web site at:  
 http://www.pmc-sierra.com  
 For corporate information,  
 send email to:  
 info@pmc-sierra.com

PMC-2030527 (R2)  
 © Copyright PMC-Sierra, Inc. 2003. All  
 rights reserved. March 2003.  
 For a complete list of PMC-Sierra's  
 trademarks and registered trademarks,  
 visit: http://www.pmc-sierra.com/legal/