



Intellimod™ L-Series Three Phase IGBT Inverter + Brake 50 Amperes/600 Volts

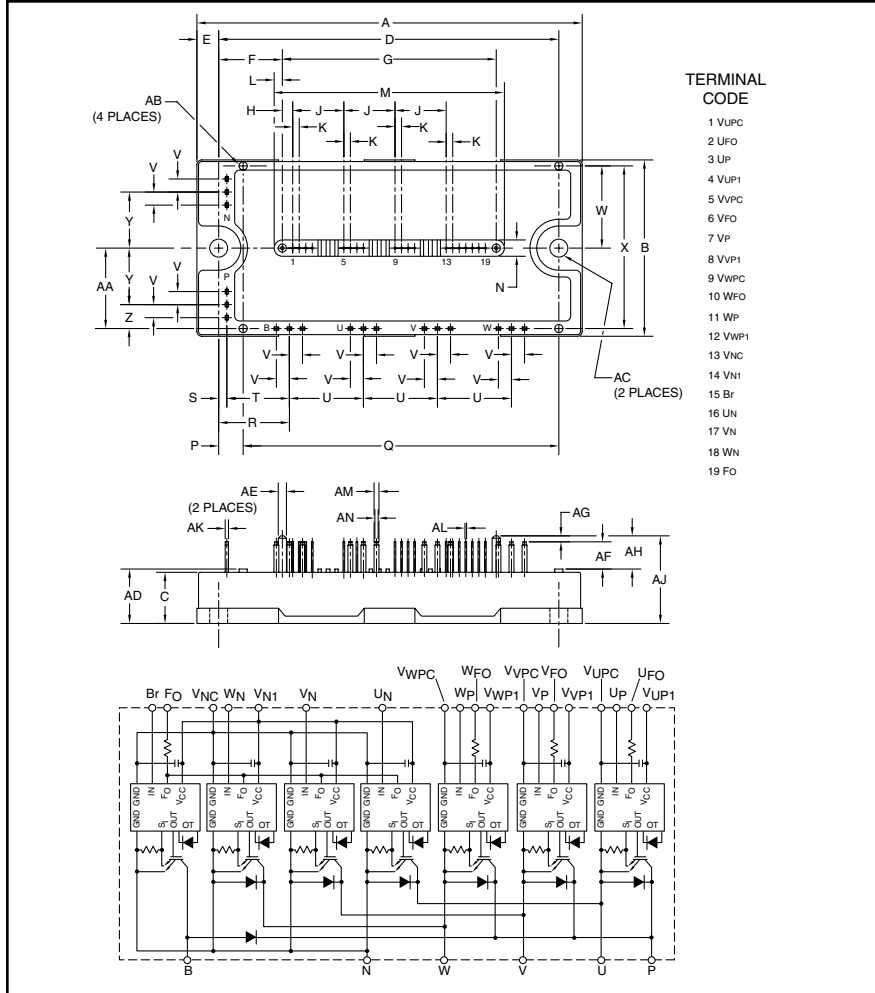

TERMINAL CODE

- 1 VUPC
- 2 UFO
- 3 UP
- 4 VUP1
- 5 VWPC
- 6 WFO
- 7 VP
- 8 VVP1
- 9 VWPC
- 10 WFO
- 11 WP
- 12 VWP1
- 13 VNC
- 14 VN1
- 15 Br
- 16 UN
- 17 VN
- 18 WN
- 19 Fo

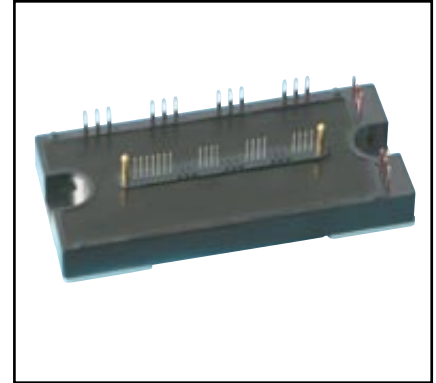

Description:

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

Features:

- Complete Output Power Circuit
- Gate Drive Circuit
- Protection Logic
 - Short Circuit
 - Over Temperature
 - Using On-chip Temperature Sensing
 - Under Voltage
- Low Loss Using 5th Generation IGBT Chip

Applications:

- Inverters
- UPS
- Motion/Servo Control
- Power Supplies

Ordering Information:

Example: Select the complete part number from the table below -i.e. PM50RLB060 is a 600V, 50 Ampere Intellimod™ Intelligent Power Module.

Outline Drawing and Circuit Diagram

| Dimensions | Inches | Millimeters |
|------------|--------|-------------|
| A | 4.72 | 120.0 |
| B | 2.17 | 55.0 |
| C | 0.63 | 16.0 |
| D | 4.17 | 106.0 |
| E | 0.28 | 7.0 |
| F | 0.78 | 19.75 |
| G | 2.62 | 66.5 |
| H | 0.13 | 3.25 |
| J | 0.63 | 16.0 |
| K | 0.08 | 2.0 |
| L | 0.10 | 2.5 |
| M | 2.81 | 71.5 |
| N | 0.20 | 5.0 |
| P | 0.31 | 7.75 |
| Q | 3.87 | 98.25 |
| R | 0.87 | 22.0 |
| S | 0.10 | 2.5 |
| T | 0.77 | 19.5 |
| U | 0.91 | 23.0 |

| Dimensions | Inches | Millimeters |
|------------|-----------|-------------|
| V | 0.16 | 4.0 |
| W | 1.01 | 25.75 |
| X | 2.00 | 50.75 |
| Y | 0.69 | 17.5 |
| Z | 0.30 | 7.5 |
| AA | 0.98 | 25.0 |
| AB | 0.10 Dia. | Dia. 2.5 |
| AC | 0.22 Dia. | Dia. 5.5 |
| AD | 0.67 | 17.0 |
| AE | 0.10 Dia. | Dia. 2.5 |
| AF | 0.33 | 8.5 |
| AG | 0.08 | 2.0 |
| AH | 0.41 | 10.5 |
| AJ | 1.08 | 27.5 |
| AK | 0.04 | 1.0 |
| AL | 0.02 Sq. | Sq. 0.5 |
| AM | 0.06 | 1.5 |
| AN | 0.04 | 1.0 |

| Type | Current Rating Amperes | V _{CES} Volts (x 10) |
|------|---------------------------|----------------------------------|
| PM | 50 | 60 |



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM50RLB060
Intellimod™ L-Series
Three Phase IGBT Inverter + Brake
50 Amperes/600 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | PM50RLB060 | Units |
|---|------------------------|------------|------------------|
| Power Device Junction Temperature | T_j | -20 to 150 | $^\circ\text{C}$ |
| Storage Temperature | T_{stg} | -40 to 125 | $^\circ\text{C}$ |
| Mounting Torque, M5 Mounting Screws | — | 31 | in-lb |
| Module Weight (Typical) | — | 340 | Grams |
| Supply Voltage, Surge (Applied between P - N) | $V_{\text{CC(surge)}}$ | 550 | Volts |
| Self-protection Supply Voltage Limit (Short Circuit protection Capability)* | $V_{\text{CC(prot.)}}$ | 400 | Volts |
| Isolation Voltage, AC 1 minute, 60Hz Sinusoidal | V_{ISO} | 2500 | Volts |

* $V_D = 13.5 \sim 16.5\text{V}$, Inverter Part, $T_j = 125^\circ\text{C}$

IGBT Inverter Sector

| | | | |
|--|---------------------|-----|---------|
| Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$) | V_{CES} | 600 | Volts |
| Collector Current ($T_C = 25^\circ\text{C}$) | $\pm I_C$ | 50 | Amperes |
| Peak Collector Current ($T_C = 25^\circ\text{C}$) | $\pm I_{\text{CP}}$ | 100 | Amperes |
| Collector Dissipation ($T_C = 25^\circ\text{C}$) | P_C | 101 | Watts |

IGBT Brake Sector

| | | | |
|--|---------------------|-----|---------|
| Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$) | V_{CES} | 600 | Volts |
| Collector Current ($T_C = 25^\circ\text{C}$) | $\pm I_C$ | 30 | Amperes |
| Peak Collector Current ($T_C = 25^\circ\text{C}$) | $\pm I_{\text{CP}}$ | 60 | Amperes |
| Collector Dissipation ($T_C = 25^\circ\text{C}$) | P_C | 79 | Watts |
| Diode Rated DC Reverse Voltage ($T_C = 25^\circ\text{C}$) | $V_{\text{R(DC)}}$ | 600 | Volts |
| Diode Forward Current | I_F | 30 | Amperes |

Control Sector

| | | | |
|--|------------------|----|-------|
| Supply Voltage (Applied between $V_{\text{UP1}}-V_{\text{UPC}}$, $V_{\text{VP1}}-V_{\text{VPC}}$, $V_{\text{WP1}}-V_{\text{WPC}}$, $V_{\text{N1}}-V_{\text{NC}}$) | V_D | 20 | Volts |
| Input Voltage (Applied between U_P-V_{UPC} , V_P-V_{VPC} , W_P-V_{WPC} , $U_N-V_{\text{N-}}$, $W_N-V_{\text{N-Br}}-V_{\text{NC}}$) | V_{CIN} | 20 | Volts |
| Fault Output Supply Voltage (Applied between $U_{\text{FO}}-V_{\text{UPC}}$, $V_{\text{FO}}-V_{\text{VPC}}$, $W_{\text{FO}}-V_{\text{WPC}}$, F_O-V_{NC}) | V_{FO} | 20 | Volts |
| Fault Output Current (U_{FO} , V_{FO} , W_{FO} , F_O Terminals) | I_{FO} | 20 | mA |

PM50RLB060
Intellimod™ L-Series
Three Phase IGBT Inverter + Brake
 50 Amperes/600 Volts


Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|--------------------------------------|---------------|--|------|------|------|---------------|
| IGBT Inverter Sector | | | | | | |
| Collector-Emitter Cutoff Current | I_{CES} | $V_{CE} = V_{CES}, V_D = 15V, T_j = 25^\circ\text{C}$ | — | — | 1.0 | mA |
| | | $V_{CE} = V_{CES}, V_D = 15V, T_j = 125^\circ\text{C}$ | — | — | 10 | mA |
| Diode Forward Voltage | V_{EC} | $-I_C = 50A, V_{CIN} = 15V, V_D = 15V$ | — | 2.2 | 3.3 | Volts |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | $V_D = 15V, V_{CIN} = 0V, I_C = 50A,$ $T_j = 25^\circ\text{C}$ | — | 1.6 | 2.1 | Volts |
| | | $V_D = 15V, V_{CIN} = 0V, I_C = 50A,$ $T_j = 125^\circ\text{C}$ | — | 1.5 | 2.0 | Volts |
| Inductive Load Switching Times | t_{on} | | 0.5 | 1.0 | 2.4 | μs |
| | t_{rr} | $V_D = 15V, V_{CIN} = 0 \Leftrightarrow 15V$ | — | 0.2 | 0.4 | μs |
| | $t_{C(on)}$ | $V_{CC} = 300V, I_C = 50A$ | — | 0.4 | 1.0 | μs |
| | t_{off} | $T_j = 125^\circ\text{C}$ | — | 1.2 | 2.5 | μs |
| | $t_{C(off)}$ | | — | 0.5 | 1.0 | μs |


IGBT Brake Sector

| | | | | | | |
|--------------------------------------|---------------|--|---|-----|-----|-------|
| Collector-Emitter Cutoff Current | I_{CES} | $V_{CE} = V_{CES}, V_D = 15V, T_j = 25^\circ\text{C}$ | — | — | 1.0 | mA |
| | | $V_{CE} = V_{CES}, V_D = 15V, T_j = 125^\circ\text{C}$ | — | — | 10 | mA |
| Diode Forward Voltage | V_{FM} | $I_F = 30A$ | — | 2.2 | 3.3 | Volts |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | $V_D = 15V, V_{CIN} = 0V, I_C = 30A,$ $T_j = 25^\circ\text{C}$ | — | 1.6 | 2.1 | Volts |
| | | $V_D = 15V, V_{CIN} = 0V, I_C = 30A,$ $T_j = 125^\circ\text{C}$ | — | 1.5 | 2.0 | Volts |

Note 1: T_C (Base Plate) Measurement Point



Note 2: T_C (Under the Chip) Measurement Point



| Arm \ Axis | UP | | VP | | WP | | UN | | VN | | WN | | Br | |
|------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | IGBT | FWDi | IGBT | FWDi | IGBT | FWDi | IGBT | FWDi | IGBT | FWDi | IGBT | FWDi | IGBT | FWDi |
| X | 29.0 | 29.5 | 64.6 | 65.1 | 85.9 | 86.4 | 38.1 | 37.6 | 54.8 | 55.3 | 76.1 | 75.6 | 18.3 | 22.4 |
| Y | -7.3 | 1.6 | -7.3 | 2.1 | -7.3 | 2.1 | 5.3 | -4.6 | 5.3 | -4.6 | 5.3 | -4.6 | -7.4 | 7.0 |



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM50RLB060
Intellimod™ L-Series
Three Phase IGBT Inverter + Brake
50 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|--|--|--|------|------|------|------------------|
| Short Circuit Trip Level ($-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $V_D = 15\text{V}$) | SC | Inverter Part | 100 | — | — | Amperes |
| | | Brake Part | 60 | — | — | Amperes |
| Short Circuit Current Delay Time | $t_{\text{off(SC)}}$ | $V_D = 15\text{V}$ | — | 0.2 | — | μs |
| Over Temperature Protection (Detect T_j of IGBT Chip) | OT | Trip Level | 135 | 145 | 155 | $^\circ\text{C}$ |
| | | Reset Level | — | 125 | — | $^\circ\text{C}$ |
| Supply Circuit Under-voltage Protection ($-20 \leq T_j \leq 125^\circ\text{C}$) | UV | Trip Level | 11.5 | 12.0 | 12.5 | Volts |
| | | Reset Level | — | 12.5 | — | Volts |
| Circuit Current | I_D | $V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$, $V_{\text{N1}}-V_{\text{NC}}$ | — | 20 | 30 | mA |
| | | $V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$, $V_{\text{XP1}}-V_{\text{XPC}}$ | — | 5 | 10 | mA |
| Input ON Threshold Voltage | $V_{\text{th(on)}}$ | Applied between U_P-V_{UPC} , | 1.2 | 1.5 | 1.8 | Volts |
| Input OFF Threshold Voltage | $V_{\text{th(off)}}$ | V_P-V_{VPC} , W_P-V_{WPC} , $U_N- V_N- W_N-Br-V_{\text{NC}}$ | 1.7 | 2.0 | 2.3 | Volts |
| Fault Output Current* | $I_{\text{FO(H)}}$ $I_{\text{FO(L)}}$ | $V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$ | — | — | 0.01 | mA |
| | | $V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$ | — | 10 | 15 | mA |
| Fault Output Pulse Width* | t_{FO} | $V_D = 15\text{V}$ | 1.0 | 1.8 | — | ms |

*Fault output is given only when the internal SC, OT and UV protections schemes of either upper or lower device operate to protect it.

Thermal Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristic | Symbol | Condition | Min. | Typ. | Max. | Units |
|--|-----------------------|--|------|------|-------|-----------------------|
| Junction to Case Thermal Resistance Inverter Part | $R_{\text{th(j-c)Q}}$ | Inverter IGBT (Per 1/6 Module) (Note 1) | — | — | 1.24 | $^\circ\text{C/Watt}$ |
| | | Inverter FWDi (Per 1/6 Module) (Note 1) | — | — | 2.09 | $^\circ\text{C/Watt}$ |
| | $R_{\text{th(j-c)D}}$ | Brake IGBT (Per 1/6 Module) (Note 1) | — | — | 1.57 | $^\circ\text{C/Watt}$ |
| | | Brake FWDi (Per 1/6 Module) (Note 1) | — | — | 2.85 | $^\circ\text{C/Watt}$ |
| | $R_{\text{th(j-c)Q}}$ | Inverter IGBT (Per 1/6 Module) (Note 2) | — | — | 0.95 | $^\circ\text{C/Watt}$ |
| | | Inverter FWDi (Per 1/6 Module) (Note 2) | — | — | 1.61 | $^\circ\text{C/Watt}$ |
| | $R_{\text{th(j-c)D}}$ | Brake IGBT (Per 1/6 Module) (Note 2) | — | — | 1.21 | $^\circ\text{C/Watt}$ |
| | | Brake FWDi (Per 1/6 Module) (Note 2) | — | — | 2.19 | $^\circ\text{C/Watt}$ |
| Contact Thermal Resistance | $R_{\text{th(c-f)}}$ | Case to Fin Per Module, Thermal Grease Applied (Note 1) | — | — | 0.038 | $^\circ\text{C/Watt}$ |

Recommended Conditions for Use










| Characteristic | Symbol | Condition | Value | Units |
|---------------------------------|-----------------------|--|----------------|---------------|
| Supply Voltage | V_{CC} | Applied across P-N Terminals | ≤ 400 | Volts |
| Control Supply Voltage** | V_D | Applied between $V_{\text{UP1}}-V_{\text{UPC}}$, $V_{\text{VP1}}-V_{\text{VPC}}$, $V_{\text{WP1}}-V_{\text{WPC}}$, $V_{\text{N1}}-V_{\text{NC}}$ | 15.0 ± 1.5 | Volts |
| Input ON Voltage | $V_{\text{CIN(on)}}$ | Applied between U_P-V_{UPC} , | ≤ 0.8 | Volts |
| Input OFF Voltage | $V_{\text{CIN(off)}}$ | V_P-V_{VPC} , W_P-V_{WPC} , $U_N- V_N- W_N-Br-V_{\text{NC}}$ | ≥ 9.0 | Volts |
| PWM Input Frequency | f_{PWM} | — | ≤ 20 | kHz |
| Arm Shoot-through Blocking Time | t_{DEAD} | Input Signal | ≥ 2.0 | μs |

** With ripple satisfying the following conditions: dv/dt swing $\leq \pm 5\text{V}/\mu\text{s}$, Variation $\leq 2\text{V}$ peak to peak.



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM50RLB060
Intellimod™ L-Series
Three Phase IGBT Inverter + Brake
50 Amperes/600 Volts

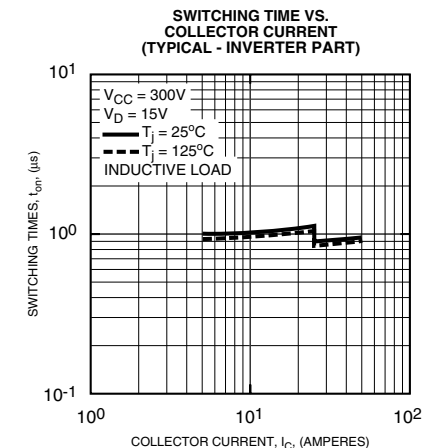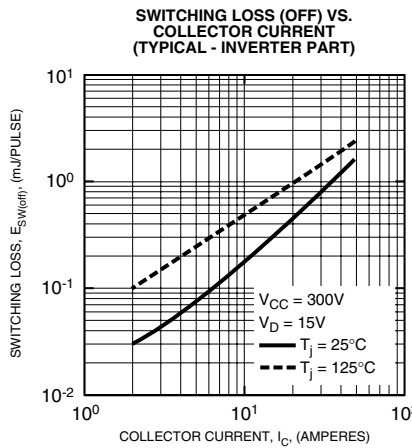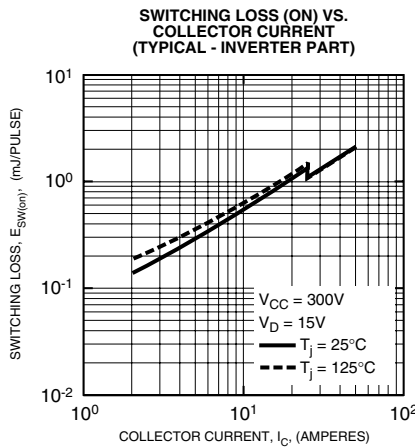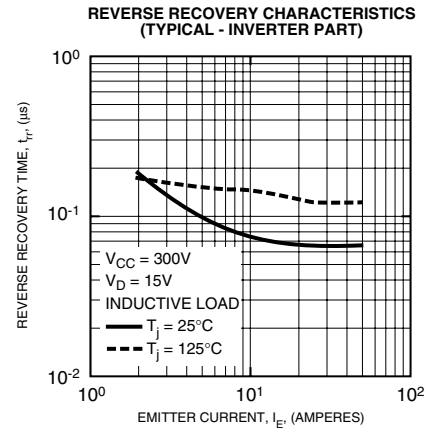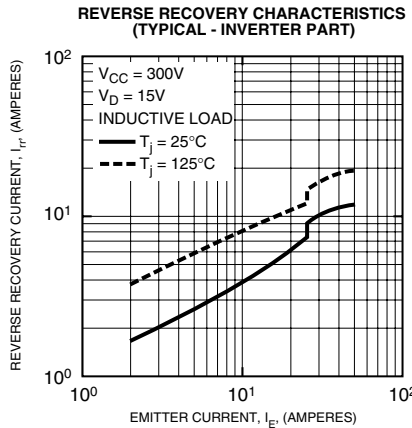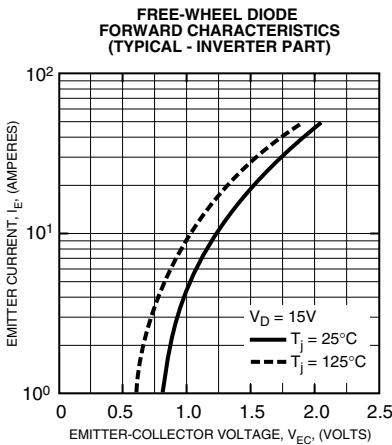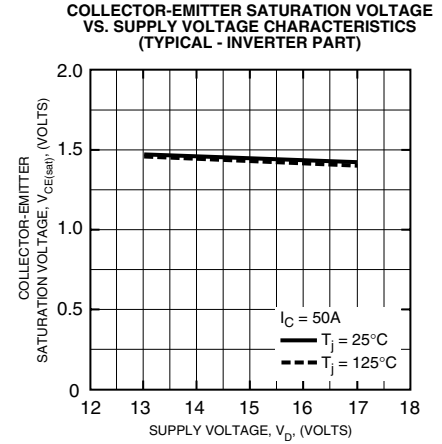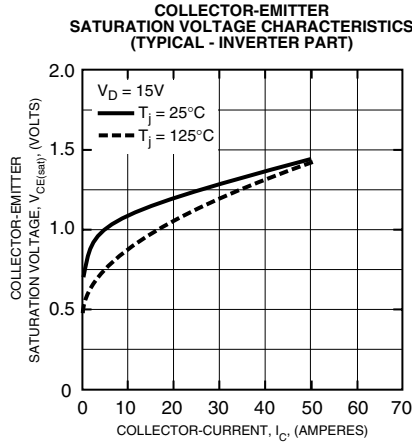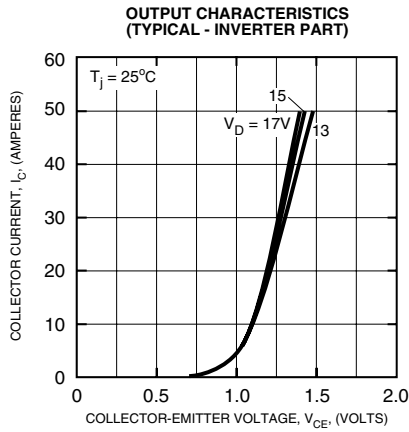

PM50RLB060
Intellimod™ L-Series
Three Phase IGBT Inverter + Brake
50 Amperes/600 Volts

