www.DataSheet4U.com

PQxxxEZ1HZxH Series

Low Voltage Operation
Low Power-Loss Voltage Regulators

■ Features

1.Low voltage operation (Minimum operating voltage: 2.35V)
2.5V input → available 1.5 to 1.8V
2.Low dissipation current
Dissipation current at no load: MAX. 2mA
Output OFF-state dissipation current: MAX. 5μA
3.Low power-loss
4.Built-in overcurrent and overheat protection functions
5.RoHS directive compliant

■ Applications

1.Power supplies for personal computers and peripheral equipment
2.Power supplies for various electronic equipment such as DVD player or STB

■ Model Line-up

Output current	Package type	Output voltage		
		1.5V	1.8V	2.5V
1.5A	Taping	PQ015EZ1HZPH	PQ018EZ1HZPH	PQ025EZ1HZPH
	Sleeve	PQ015EZ1HZZH	PQ018EZ1HZZH	PQ025EZ1HZZH
		3.0V	3.3V	
1.5A	Taping	PQ030EZ1HZPH	PQ033EZ1HZPH	
	Sleeve	PQ030EZ1HZZH	PQ033EZ1HZZH	

www.DataSheet4U.com

■ Absolute Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Rating	Unit
*1 Input voltage	V_{IN}	10	V
*1 ON/OFF control terminal voltage	V_C	10	V
Output current	I_O	1.5	A
*2 Power dissipation	P_D	8	W
*3 Junction temperature	T_j	150	°C
Operating temperature	T_{opr}	-40 to +85	°C
Storage temperature	T_{stg}	-40 to +150	°C
Soldering temperature	T_{sol}	260(10s)	°C

*1 All are open except GND and applicable terminals.
*2 P_D: With infinite heat sink
*3 Overheat protection may operate at Tj:125°C to 150°C

■ Outline Dimensions

(Unit : mm)

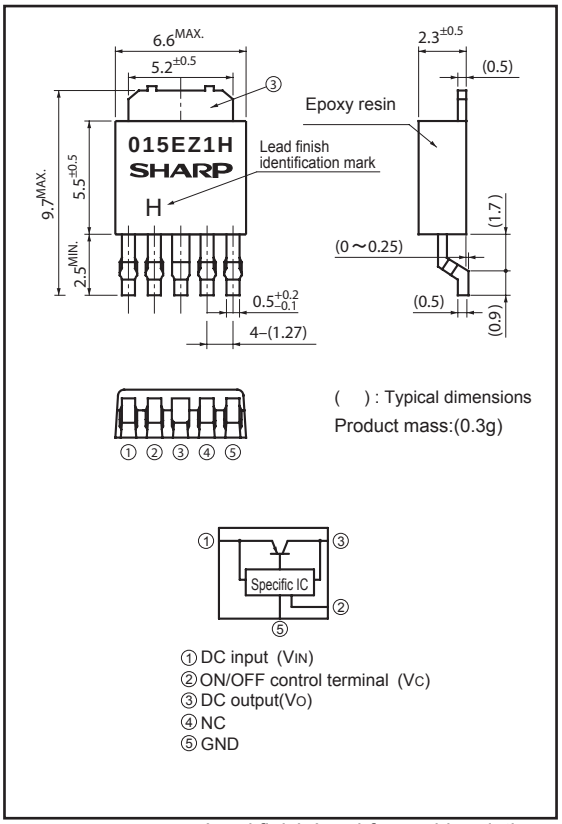

Lead finish:Lead-free solder plating
(Composition: Sn2Cu)

Notice The content of data sheet is subject to change without prior notice.
In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

www.DataSheet4U.com

■ Electrical Characteristics

(Unless otherwise specified, condition shall be V_{IN}=V_O(TYP.)+1V, I_O=0.5A,V_C=2.7V, Ta=25˚C)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input voltage	V_{IN}	—	Refer to the table 1			V
Output voltage	V_O	—	Refer to the table 2			V
Load regulation	R_{egL}	I_O=5mA to 1.5A	—	0.2	2.0	%
Line regulation	R_{egI}	V_{IN}=V_O(TYP.)+1V to V_O(TYP.)+6V	—	0.1	1.0	%
Temperature coefficient of output voltage	T_CV_O	Tj=0 to 125°C, I_O=5mA	—	±0.01	—	%/°C
Ripple Rejection	RR	Refer to Fig.2	45	60	—	dB
※4 Dropout voltage	V_{I-O}	※5 I_O=1.25A	—	—	1.0	V
※6 ON-state voltage for control	$V_{C(ON)}$	—	2.0	—	—	V
ON-state current for control	$I_{C(ON)}$	—	—	—	200	µA
OFF-state voltage for control	$V_{C(OFF)}$	—	—	—	0.8	V
OFF-state current for control	$I_{C(OFF)}$	V_C=0.4V	—	—	2	µA
Quiescent current	I_q	I_O=0A	—	1	2	mA
Output OFF-state dissipation current	I_{qs}	I_O=0A, V_C=0.4V	—	—	5	µA

※4 Applied **PQ030EZ1HZxH**,**PQ033EZ1HZxH**
※5 Input voltage shall be the value when output voltage is 95% in comparison with the initial value.
※6 In case of opening control terminal ② , output voltage turns off.

Table.1 Input Voltage Line-up

(Unless otherwise specified, condition shall be I_O=0.5A,V_C=2.7V, Ta=25˚C)

Model No.	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
PQ015EZ1HZxH	V_{IN}	–	2.35	–	10	V
PQ018EZ1HZxH	V_{IN}	–	2.35	–	10	V
PQ025EZ1HZxH	V_{IN}	–	3.0	–	10	V
PQ030EZ1HZxH	V_{IN}	–	3.5	–	10	V
PQ033EZ1HZxH	V_{IN}	–	3.8	–	10	V

Table.2 Output Voltage Line-up

www.DataSheet4U.com

(Unless otherwise specified, condition shall be V_{IN}=V_O(TYP.)+1V, I_O=0.5A,V_C=2.7V, Ta=25˚C)

Model No.	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
PQ015EZ1HZxH	V_O	–	1.45	1.5	1.55	V
PQ018EZ1HZxH	V_O	–	1.75	1.8	1.85	V
PQ025EZ1HZxH	V_O	–	2.438	2.5	2.562	V
PQ030EZ1HZxH	V_O	–	2.925	3.0	3.075	V
PQ033EZ1HZxH	V_O	–	3.218	3.3	3.382	V

www.DataSheet4U.com

Fig.1 Test Circuit

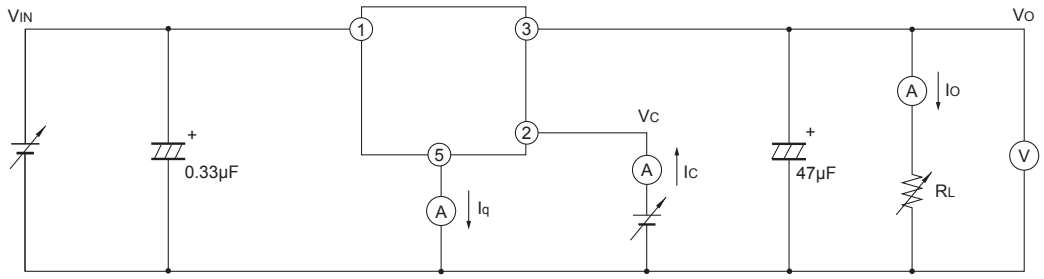

Fig.2 Test Circuit for Ripple Rejection

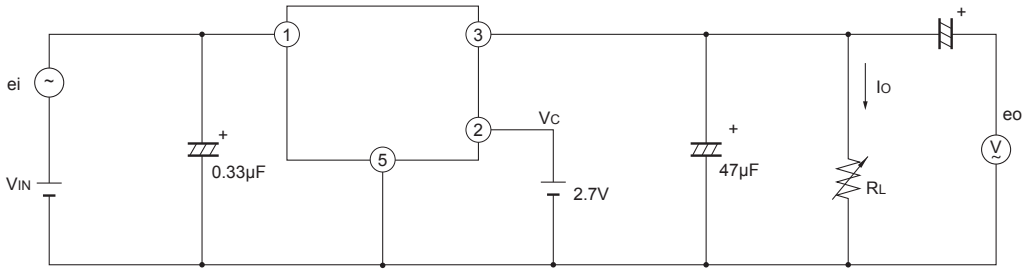

f=120Hz(sine wave)
ei(rms)=0.5V
V_{IN}= V_O(TYP)+2V
I_O=0.3A
RR=20log(ei(rms)/eo(rms))

www.DataSheet4U.com

Fig.3 Power Dissipation vs. Ambient Temperature

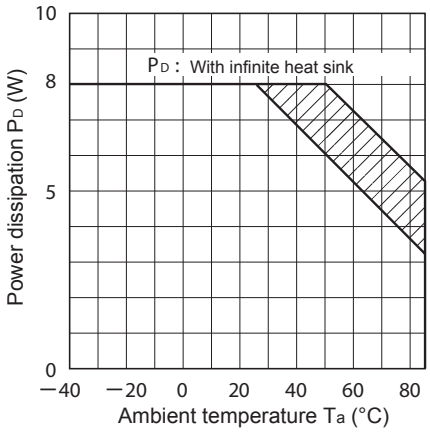

Note) Oblique line portion:Overheat protection may operate in this area.

Fig.4 Overcurrent Protection Characteristics (**PQ015EZ1HZxH**)

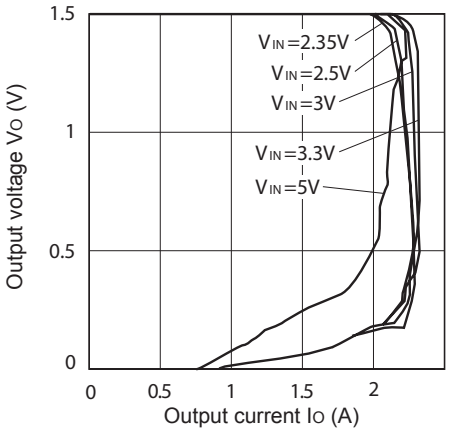

Fig.5 Overcurrent Protection Characteristics (Typical Value)(**PQ018EZ1HZxH**)

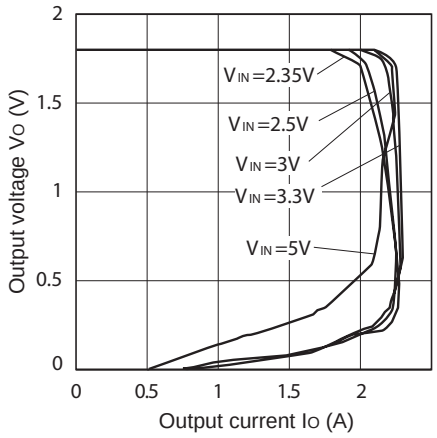

Fig.6 Overcurrent Protection Characteristics (**PQ025EZ1HZxH**)

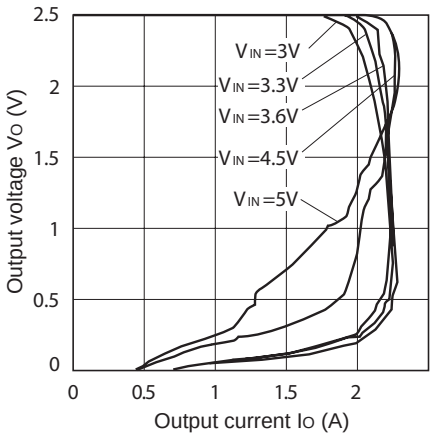

Fig.7 Overcurrent Protection Characteristics (**PQ030EZ1HZxH**)

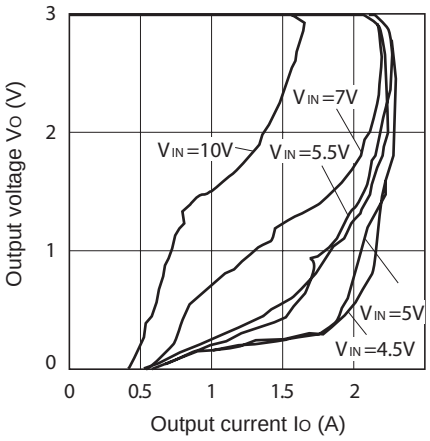

Fig.8 Overcurrent Protection Characteristics (**PQ033EZ1HZxH**)

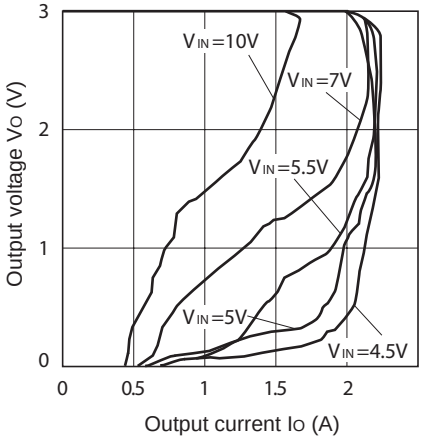

www.DataSheet4U.com

Fig.9 Output Voltage vs. Junction Temperature (**PQ015EZ1HZxH**)

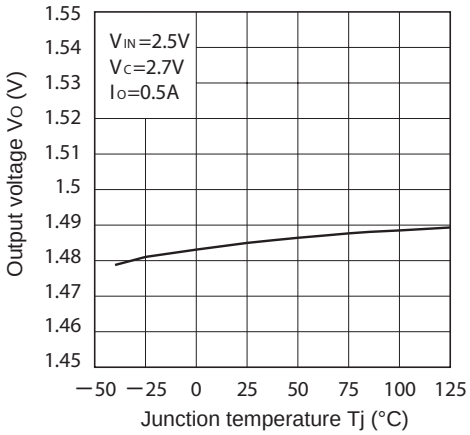

Fig.10 Output Voltage vs. Junction Temperature (**PQ018EZ1HZxH**)

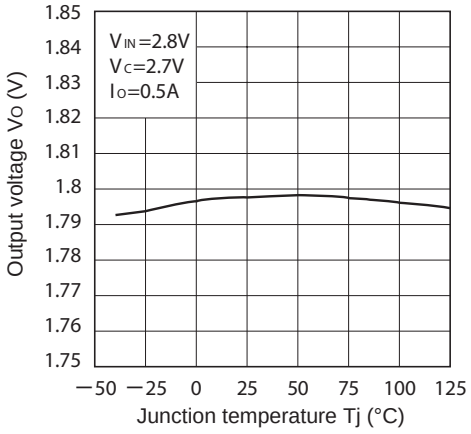

Fig.11 Output Voltage vs. Junction Temperature (**PQ025EZ1HZxH)**

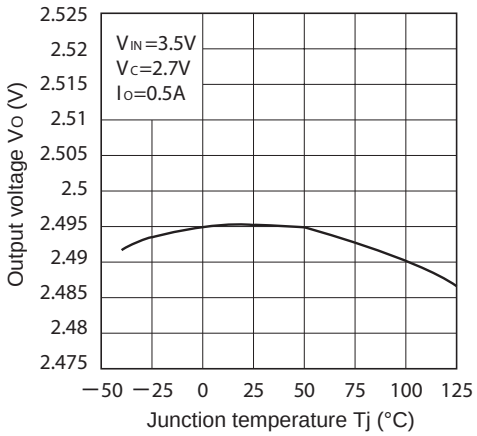

Fig.12 Output Voltage vs. Junction Temperature (**PQ030EZ1HZxH)**

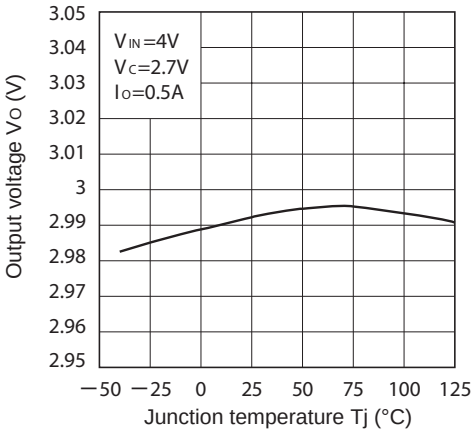

Fig.13 Output Voltage vs. Junction Temperature (**PQ033EZ1HZxH)**

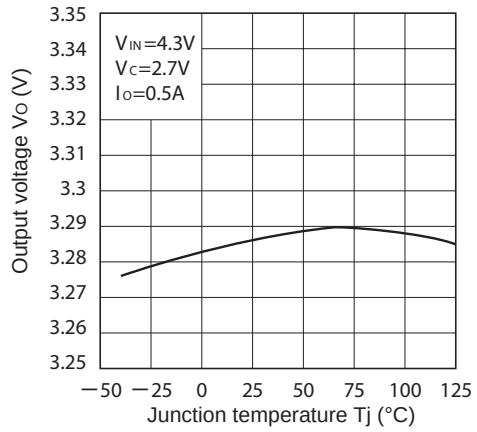

Fig.14 Output Voltage vs. Input Voltage (**PQ015EZ1HZxH**)

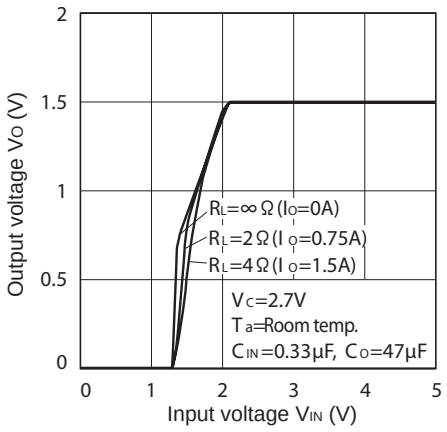

www.DataSheet4U.com

Fig.15 Output Voltage vs. Input Voltage (**PQ018EZ1HZxH**)

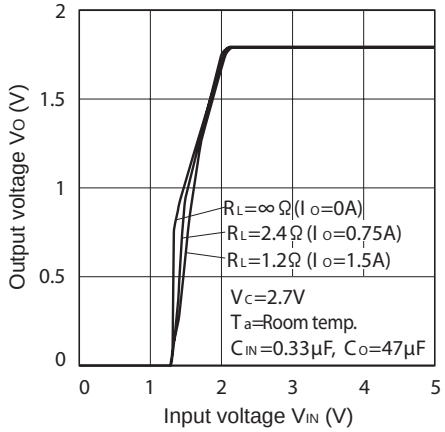

Fig.16 Output Voltage vs. Input Voltage (**PQ025EZ1HZxH**)

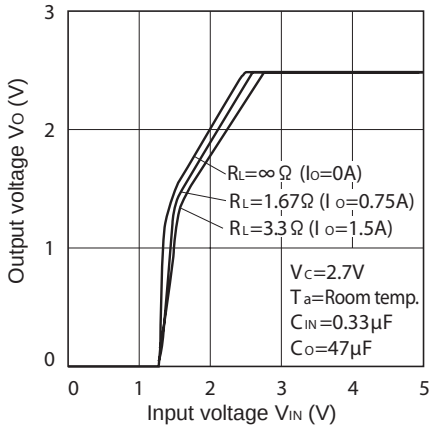

Fig.17 Output Voltage vs. Input Voltage (**PQ030EZ1HZxH**)

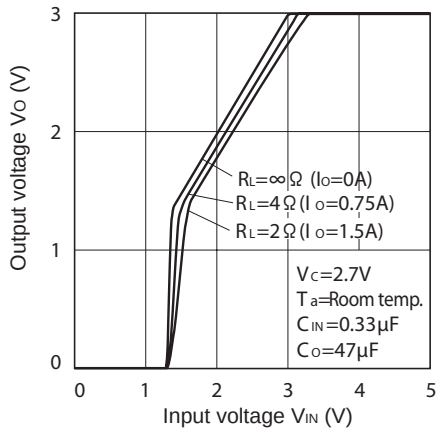

Fig.18 Output Voltage vs. Input Voltage (**PQ033EZ1HZxH**)

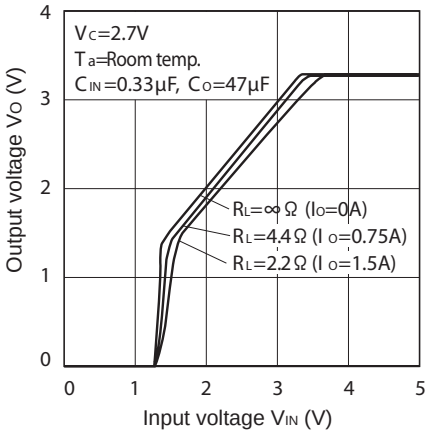

Fig.19 Circuit Operating Current vs. Input Voltage (**PQ015EZ1HZxH**)

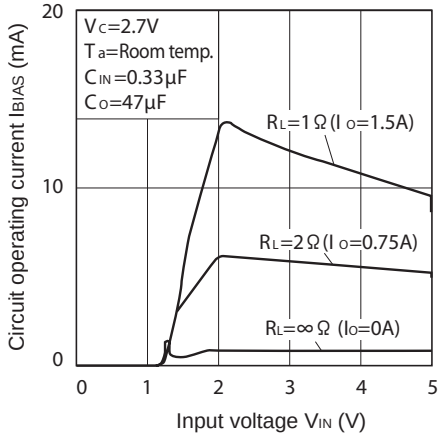

Fig.20 Circuit Operating Current vs. Input Voltage (**PQ018EZ1HZxH**)

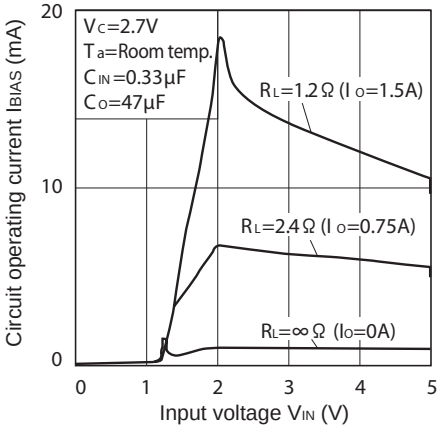

www.DataSheet4U.com

Fig.21 Circuit Operating Current vs. Input Voltage (**PQ025EZ1HZxH**)

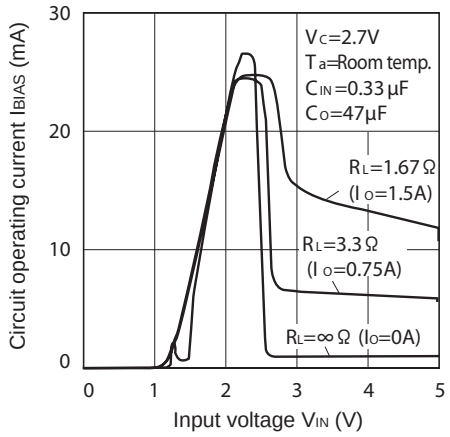

Fig.22 Circuit Operating Current vs. Input Voltage (**PQ030EZ1HZxH**)

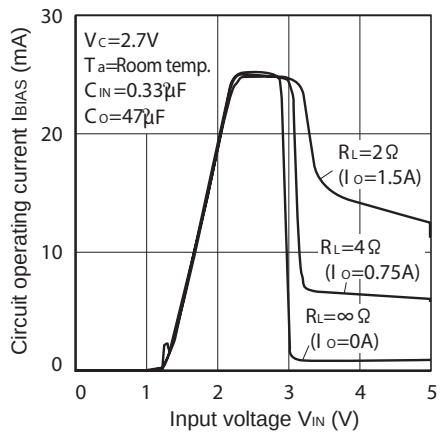

Fig.23 Circuit Operating Current vs. Input Voltage (**PQ033EZ1HZxH**)

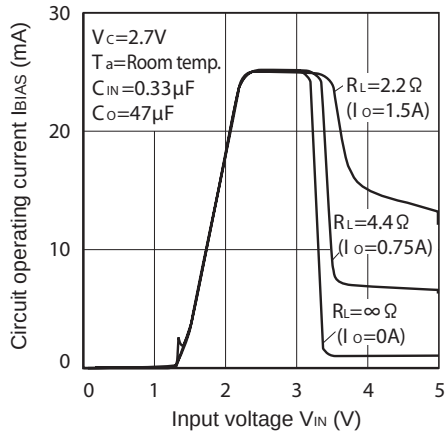

Fig.24 Dropout Voltage vs. Junction Temperature

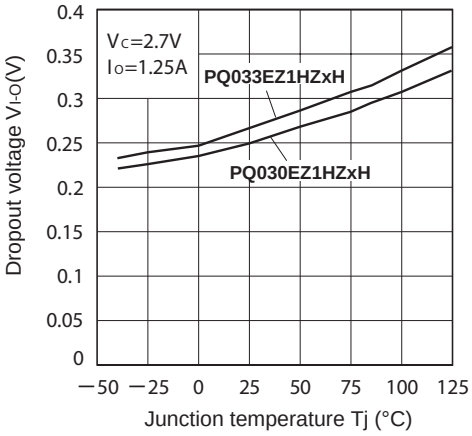

Fig.25 Quiescent Current vs. Junction Temperature

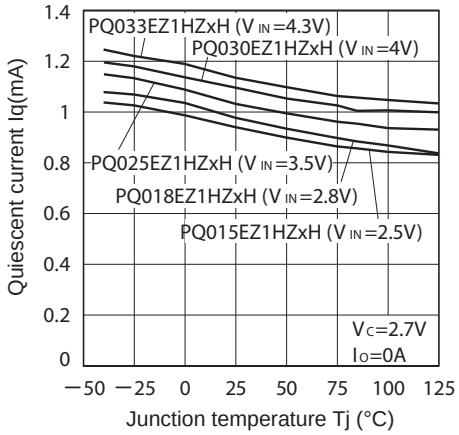

Fig.26 Ripple Rejection vs. Input Ripple Frequency

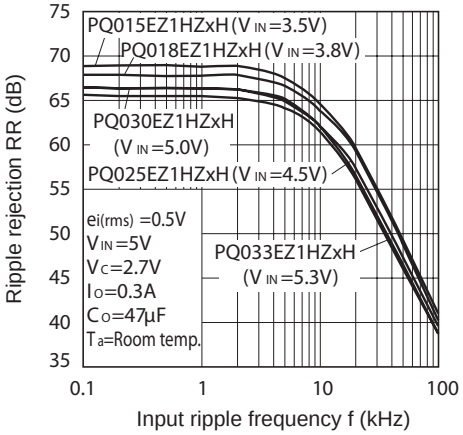

www.DataSheet4U.com

Fig.27 Ripple Rejection vs. Output Current

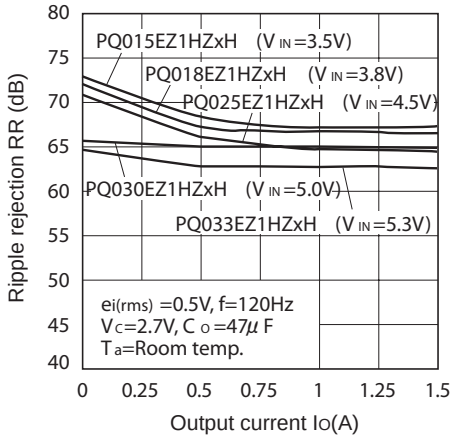

Fig.28 Power Dissipation vs. Ambient Temperature (Typical Value)

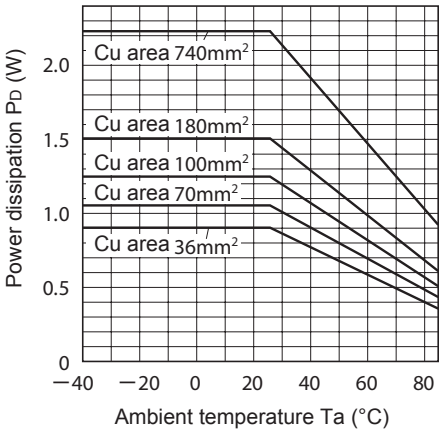



■ Typical Application

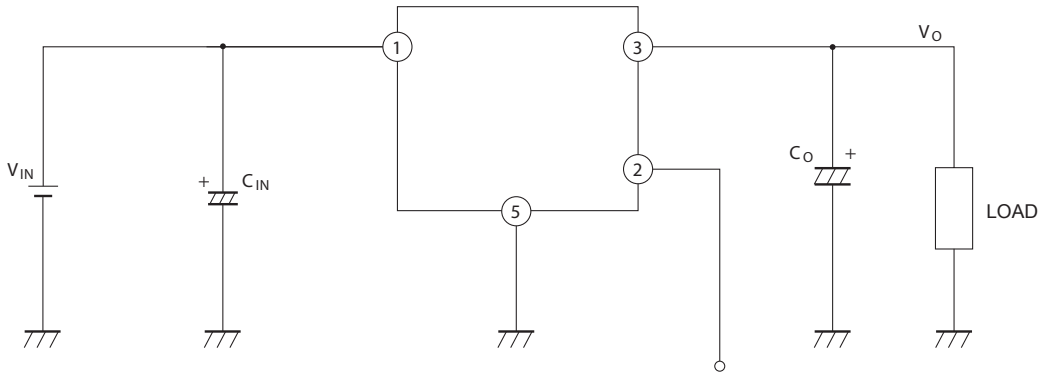

ON/OFF signal

High : Output ON
Low or open : Output OFF

www.DataSheet4U.com