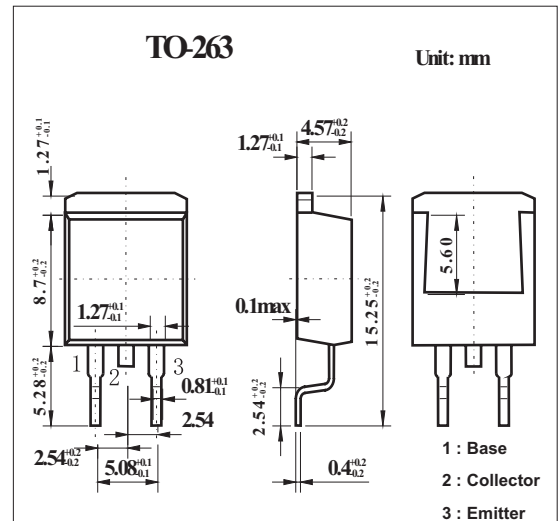


Switching Applications

2SD2198

■ Features


- Surface mount type device making the following possible.
- Low collector-to-emitter saturation voltage.

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Collector-base voltage	V_{CB0}	60	V
Collector-emitter voltage	V_{CE0}	50	V
Emitter-base voltage	V_{EB0}	6	V
Collector current	I_C	5	A
Collector current (pulse)	I_{CP}	9	A
Collector dissipation	P_C	1.65	W
$T_C = 25^\circ\text{C}$		30	W
Junction temperature	T_J	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

2SD2198

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Collector cutoff current	IcBO	V _{CB} = 40V, I _E = 0			0.1	mA
Emitter cutoff current	I _{EBO}	V _{EB} = 4V, I _C = 0			0.1	mA
DC current Gain	h _{FE}	V _{CE} = 2V, I _C = 1A	70		280	
		V _{CE} = 2V, I _C = 3A	30			
Gain bandwidth product	f _T	V _{CE} = 5V, I _C = 1A		30		MHz
Output capacitance	C _{ob}	V _{CB} = 10V, f = 1MHz		100		pF
Collector-emitter saturation voltage	V _{CE(sat)}	I _C = 3A, I _B = 0.3A			0.4	V
Collector-to-base breakdown voltage	V _{(BR)CBO}	I _C = 1mA, I _E = 0	60			V
Collector-to-emitter breakdown voltage	V _{(BR)CEO}	I _C = 1mA, R _{BE} = ∞	50			V
Emitter-base breakdown voltage	V _{(BR)EBO}	I _E = 1mA, I _C = 0	6			V
Turn-on time	t _{on}	 10 lg I₁ = 10 lg I₂ = I₁ = I₂ = 2A For PNP, the polarity is reversed. Unit (resistance : Ω, capacitance : F)		0.1		μs
Storage time	t _{stg}			1.4		μs
Fall time	t _f			0.2		μs

■ hFE Classification

Rank	Q	R	S
hFE	70~140	100~200	140~280