



PALM TECHNOLOGY CO., LTD.

The LCD(M) Specialist

CONTACT ADDRESS : 14F-15F, No.383, Yangming Rd., Sanmin District, Kaohsiung
City 807, Taiwan, R.O.C.
Tel: 886-7-3983966
Fax: 886-7-3982966
E-mail: sales@palmtech.com.tw

PART NO. : PT0353224T-A802

FOR MESSRS. : _____

CONTENTS

| NO. | ITEM | PAGE |
|------------|------------------------------------|-------------|
| 1. | Cover | 1 |
| 2. | Record of Revision | 2 |
| 3. | LCD Module Physical Data | 3 |
| 4. | External Dimensions | 4 |
| 5. | Block Diagram | 5~6 |
| 6. | Absolute Maximum Ratings | 6 |
| 7. | Electrical Characteristics | 7 |
| 8. | Touch Screen Panel Specifications | 8 |
| 9. | Interface PIN Connections | 9~10 |
| 10. | Recommand Initial Code | 11~12 |
| 11. | Electro-Optical Characteristics | 13~18 |
| 12. | Specification of Quality Assurance | 19~23 |
| 13. | Reliability | 24~25 |
| 14. | Suggestions For Using LCD Modules | 25~28 |
| 15. | Packing | 29~30 |



ACCEPTED BY : _____ PROPOSED BY : _____

RECORD OF REVISION

| DATE | PAGE | SUMMARY |
|------------|------|-------------------------------------|
| 2009/04/21 | P11 | Update initial code |
| | P13 | Add electro-optical characteristics |
| 2009/07/07 | P4 | Update LCM drawing |
| | | |

◆ LCD MODULE PHYSICAL DATA

● General Description


| | |
|-----------------------|-------------|
| Display Type | TFT LCD |
| Display Mode | NEGATIVE |
| Viewing Direction | 6 o'clock |
| Connection Type | COG |
| Operation temperature | -20°C ~70°C |
| Storage temperature | -30°C ~80°C |
| Driving IC | HX8238 |

● Mechanical Description


| Item | Standard Value | Unit |
|----------------|------------------------------|------|
| Number of dots | 320RGB X240 dots | - |
| LCM dimension | 78.2 (W) X65 (H) X4.6(T) | mm |
| TP outline | 76.6 (W) X63.6(H) | mm |
| LCD outline | 75.1 (W) X61.9 (H) X1.50 (T) | mm |
| Active area | 70.08(W) X 52.56(H) | mm |
| Dot size | 0.063 (W) X0.209 (H) | mm |
| Dot pitch | 0.073 (W) X0.219(H) | mm |
| Backlight | 6-CHIP LEDES | / |

EXTERNAL DIMENSIONS

| | | | |
|----|--------|----|-----|
| 1 | GLED | 31 | D13 |
| 2 | GLED | 32 | D14 |
| 3 | VLED | 33 | D15 |
| 4 | VLED | 34 | D16 |
| 5 | GND | 35 | D17 |
| 6 | XR | 36 | D18 |
| 7 | YD | 37 | D19 |
| 8 | XL | 38 | D20 |
| 9 | YU | 39 | D21 |
| 10 | GND | 40 | D22 |
| 11 | NC | 41 | D23 |
| 12 | NC | 42 | IHS |
| 13 | POL | 43 | IVS |
| 14 | /RESET | 44 | CLK |
| 15 | /CS | 45 | NC |
| 16 | SCL | 46 | NC |
| 17 | SDI | 47 | VCC |
| 18 | D00 | 48 | VCC |
| 19 | D01 | 49 | NC |
| 20 | D02 | 50 | NC |
| 21 | D03 | 51 | NC |
| 22 | D04 | 52 | NC |
| 23 | D05 | 53 | NC |
| 24 | D06 | 54 | NC |
| 25 | D07 | 55 | NC |
| 26 | D08 | 56 | NC |
| 27 | D09 | 57 | NC |
| 28 | D10 | 58 | DEN |
| 29 | D11 | 59 | GND |
| 30 | D12 | 60 | GND |

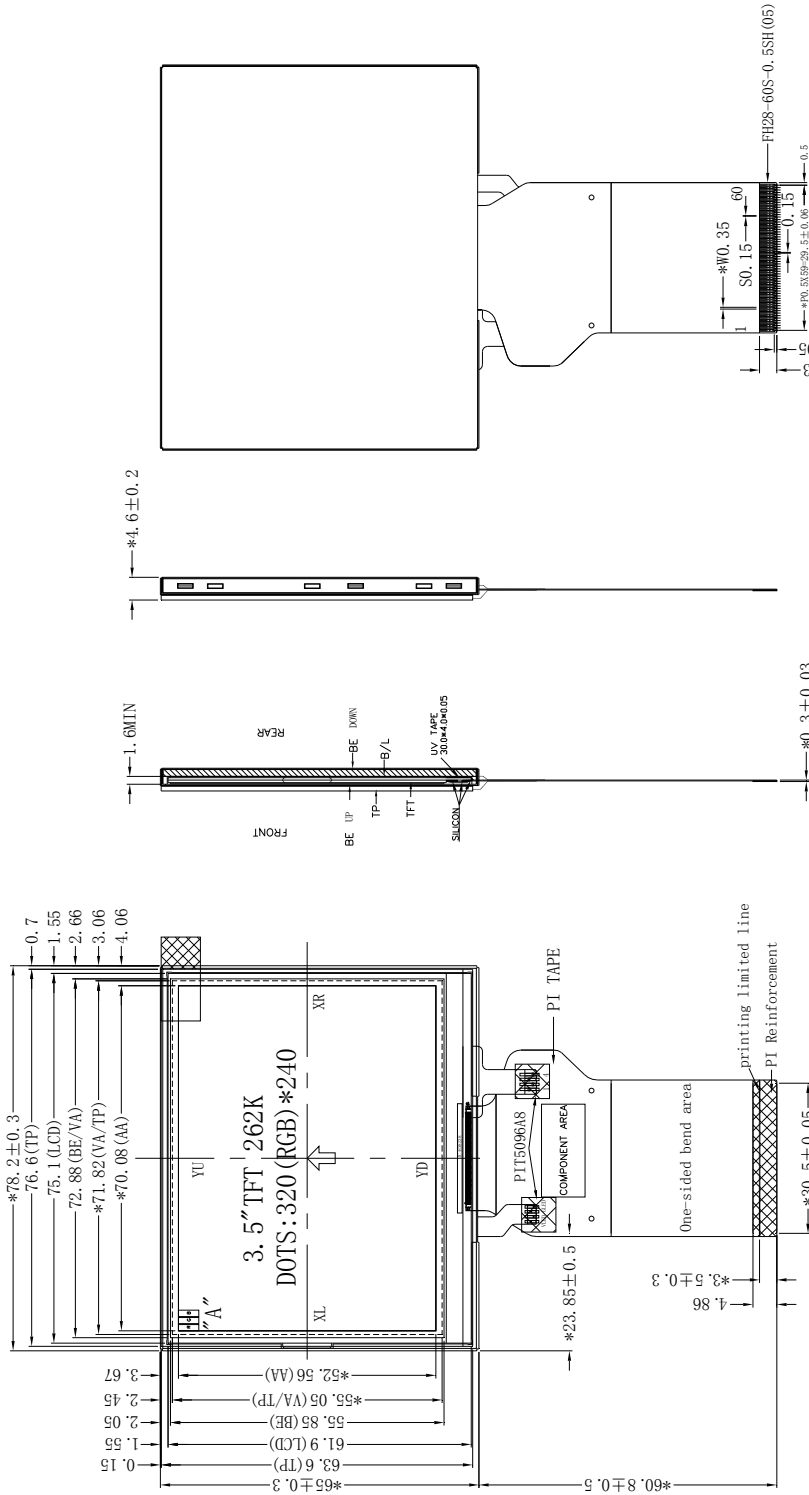

WHITE LEDS CIRCUIT




NOTE:
 1.DISPLAY TYPE:3.5" TFT,262K, TRANSMISSIVE/NEGATIVE
 2.DRIVER IC:HX8238(COG)
 3.POLARIZER : wide view/ glare type
 4.BACKLIGHT: 6 white LEDs series, Cold color
 Condition: 20mA/CHIP


- BRIGHTNESS:200CD/M2 MIN
- OPERATING TEMP:-20°C~70°C
- STORAGE TEMP:-30°C~80°C
- UNMARKED TOLERANCES:±0.2
- "**" KEY DIMENSION, INDICATION△MODIFICATION RECORD
- ALL MATERIALS MUST BE FIT FOR BHS-001 COMPLIANT

◆ **BLOCK DIAGRAM**


● **TFT-LCD Module (Interface System Structure)**

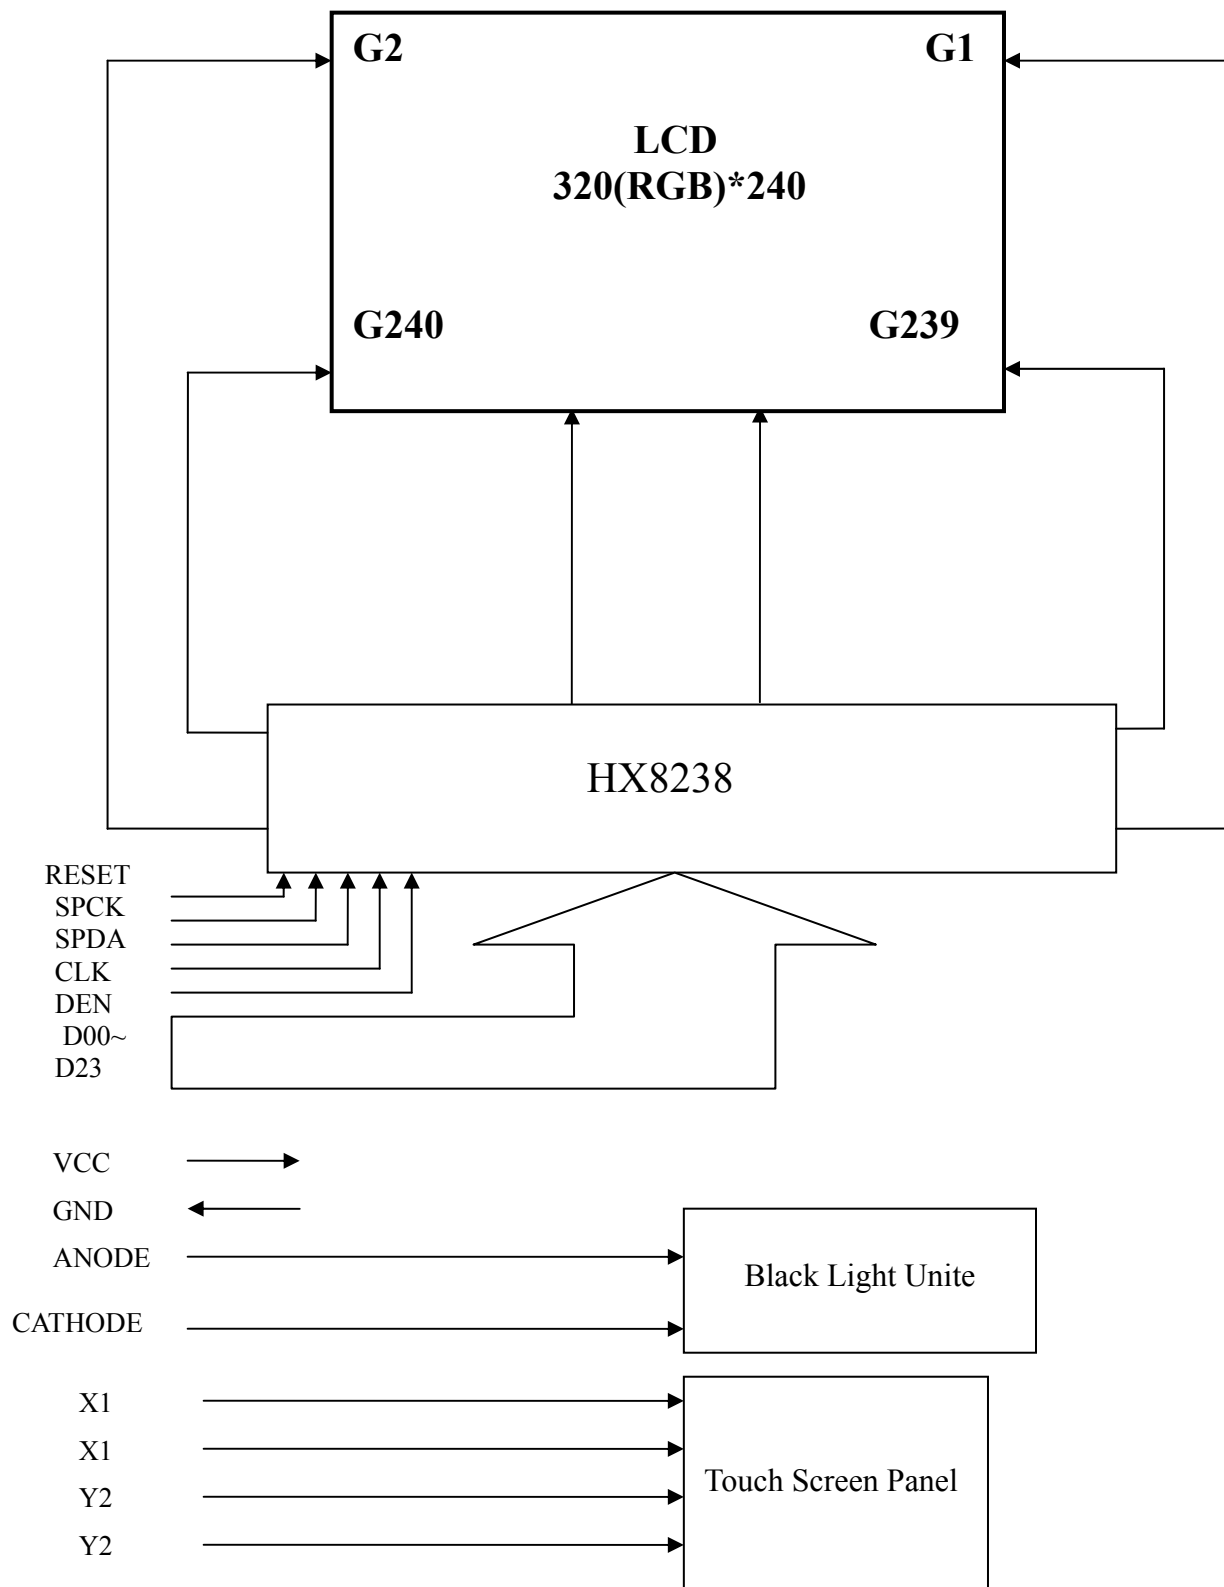

● **Black Light Unite**

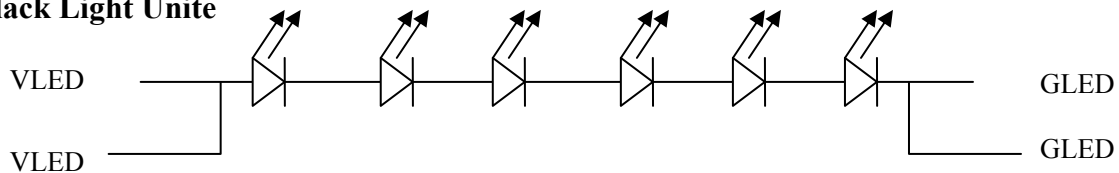

● **Touch Screen Panel(Top View)**

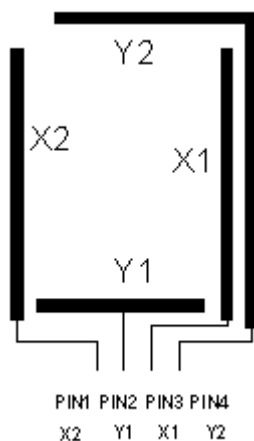

◆ **ABSOLUTE MAXIMUM RATINGS**

| Item | Symbol | Rating | Unit |
|------------------------|------------|------------------|------|
| Operating temperature | Top | -20 to 70 | °C |
| Storage temperature | Tst | -30 to 80 | °C |
| Input voltage | VCI | VSS - 0.3 to 5.0 | V |
| Supply voltage | VDD | -0.3 to +4.0 | V |
| Supply voltage for LCD | VGH - VSSA | 15.6 | V |

NOTE:

1. If the module is used above these absolute maximum ratings. It may become permanently damaged. Using the module within the following electrical characteristic conditions are also exceeded, the module will malfunction and cause poor reliability.
2. VDD>GND must be maintained.

◆ ELECTRICAL CHARACTERISTICS

● DC Characteristics

$V_{SS}=0V, T_a=25^{\circ}C$

| Item | Symbol | Condition | Min | Typ | Max | Unit |
|--|-----------------|-----------------------|-----|------|-----|------|
| Power supply | V _{DD} | T _a =25°C | 1.4 | 3.3 | 3.6 | V |
| LCD driving voltage | V _{GH} | T _a =25°C | - | 15.6 | - | V |
| Current consumption for LCD normal operation | I _{DD} | V _{DD} =3.3V | - | 10.1 | - | mA |

● Back-Light unit


| Item | Symbol | Min | Typ | Max | Unit | Remark |
|---------------------------|-----------------|------|-----|------|-------------------|--------|
| Current | I _{BL} | - | 20 | - | mA | - |
| CIE | X | 0.25 | - | 0.29 | - | - |
| | Y | 0.24 | - | 0.28 | - | |
| Brightness | - | 4000 | - | - | cd/m ² | - |
| Luminous Uniformity Ratio | - | 80 | - | - | % | - |

Note:

1. Average Luminous Uniformity of P1 ~ P5 (Using a luminance meter BM-7)

2. Luminous Uniformity Ratio = min/max * 100%

Measured Method (X*Y: Light Area).

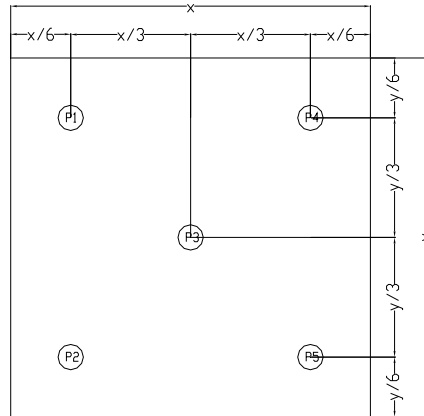

● AC Characteristics

Refer to the SPEC of HX8238

◆ Touch Screen Panel Specifications

1. Electrical Characteristics

| Item | Min | Typ | Max | Unit | Note |
|-----------------------|-----|-----|-----|------|---------------|
| Linearity | - | - | 1.5 | % | X-Axis,Y-Axis |
| Terminal Resistance | 200 | - | 900 | Ω | X(Glass side) |
| | 200 | - | 900 | Ω | Y(Film side) |
| Insulation Resistance | 25 | - | - | M Ω | DC 25V |
| Operating voltage | - | - | 7 | V | DC |
| Response Time | - | - | 10 | Ms | - |
| Transmittance | 73 | - | - | % | - |

Note 1) : Do not operate it with a thing except a polyacetal pen(tip R0.8mm or less) or a finger, especially those with hard or sharp tips such as a ball point pen or a mechanical pencil

2. Mechanical & Durability Characteristics

| Item | Min | Typ | Max | Unit | Note |
|---------------------------|------------|-----|-----|-------|------|
| Operating Force | - | - | 100 | G | (1) |
| Touch Test | 1, 000,000 | - | - | Times | (2) |
| Handwriting Friction Test | 100,000 | - | - | Times | (3) |
| Surface hardness | 3 | - | - | H | (4) |

Note (1) Pen : 0.8N or less (R0.8mm)

Finger : 0.8N or less (0.8mm)

(2) Measurement for Center part of Panel

-Hitting Pad : Tip R8mm Silicon Rubber & Tip R0.8mm Stylus pen

-Lode :150gf

-Speed :2times/sec

-Electric lode :None

(3) Measurement for 2.0mm inside of transparent insulation

-Sliding Pen : Tip R0.8mm Stylus pen

-Lode :150gf

-Speed :60mm/sec

-Sliding Length :25mm

-Electric lode : None

(4) Pressure 500gf , 45deg

3. Integration Design Guide

- Avoid the design that Front-case overlap and press on the active area of the touch-panel.
- Give enough gap (over 0.5mm at compressed) between the front case and touch-panel to protect wrong operating.
- Use a buffer material(Gasket) between the touch-panel and Front-case to protect damage and wrong operating.
- Avoid the design that buffer material overlap and press on the inside of touch-panel viewing area.

◆ INTERFACE PIN CONNECTIONS

| NO. | Symbol | Description | Input/Output | Note |
|-----|--------|--------------------------------|--------------|------|
| 1 | GLED | Backlight pin | Input | - |
| 2 | GLED | | Input | - |
| 3 | VLED | | Input | - |
| 4 | VLED | | Input | - |
| 5 | GND | Ground | Input | - |
| 6 | X1 | TP pin | Input | - |
| 7 | Y1 | | Input | - |
| 8 | X2 | | Input | - |
| 9 | Y2 | | Input | - |
| 10 | GND | Ground | Input | - |
| 11 | NC | No connection | - | - |
| 12 | NC | | - | - |
| 13 | POL | Vcom Generate Signal | Output | - |
| 14 | RESET | System Reset | Input | - |
| 15 | SPENA | Serial port data enable signal | Input | - |
| 16 | SPCK | Serial port clock | Input | - |
| 17 | SPDI | Serial data input | Input | - |
| 18 | D00 | Blue Data (LSB) | Input | - |
| 19 | D01 | Blue Data | Input | - |
| 20 | D02 | Blue Data | Input | - |
| 21 | D03 | Blue Data | Input | - |
| 22 | D04 | Blue Data | Input | - |
| 23 | D05 | Blue Data | Input | - |
| 24 | D06 | Blue Data | Input | - |
| 25 | D07 | Blue Data (MSB) | Input | - |
| 26 | D08 | Green Data(LSB) | Input | - |
| 27 | D09 | Green Data | Input | - |
| 28 | D10 | Green Data | Input | - |
| 29 | D11 | Green Data | Input | - |
| 30 | D12 | Green Data | Input | - |
| 31 | D13 | Green Data | Input | - |
| 32 | D14 | Green Data | Input | - |
| 33 | D15 | Green Data(MSB) | Input | - |
| 34 | D16 | Red Data(LSB) | Input | - |
| 35 | D17 | Red Data | Input | - |
| 36 | D18 | Red Data | Input | - |
| 37 | D19 | Red Data | Input | - |
| 38 | D20 | Red Data | Input | - |

| | | | | |
|----|-----|------------------------------------|-------|---|
| 39 | D21 | Red Data | Input | - |
| 40 | D22 | Red Data | Input | - |
| 41 | D23 | Red Data(MSB) | Input | - |
| 42 | IHS | Horizon sync signal | Input | - |
| 43 | IVS | Vertical sync signal | Input | - |
| 44 | CLK | System clock input | Input | - |
| 45 | NC | No connection | - | - |
| 46 | NC | | - | - |
| 47 | VCC | Power supply | Input | - |
| 48 | VCC | | Input | - |
| 49 | NC | No connection | - | - |
| 50 | NC | | - | - |
| 51 | NC | | - | - |
| 52 | NC | | - | - |
| 53 | NC | | - | - |
| 54 | NC | | - | - |
| 55 | NC | | - | - |
| 56 | NC | | - | - |
| 57 | NC | | - | - |
| 58 | DEN | Display enable pin from controller | Input | - |
| 59 | GND | Ground | Input | - |
| 60 | GND | | Input | - |

◆ RECOMMAND INITIAL CODE

```
void WriteRegHX8238(unsigned int reg)
{
    int i,tmp;

    CS(0);
    tmp=0x70;//01110000//RS=0,RW=0
    for(i=7;i>=0;i--)
    {
        SCL(0);
        SDI((tmp>>i)&0x01);
        SCL(1);
    }
    for(i=15;i>=0;i--)
    {
        SCL(0);
        SDI((reg>>i)&0x01);
        SCL(1);
    }
    CS(1);
}

void WriteDatHX8238(unsigned int dat)
{
    int i,tmp;
    CS(0);
    tmp=0x72;//01110010//RS=1,RW=0
    for(i=7;i>=0;i--)
    {
        SCL(0);
        SDI((tmp>>i)&0x01);
        SCL(1);
    }
    for(i=15;i>=0;i--)
    {
        SCL(0);
        SDI((dat>>i)&0x01);
        SCL(1);
    }
    CS(1);
}

void ResetHX8238()
{
    RESET(0);
    Delays(20);//must more than 20ms
    RESET(1);
    Delays(20);//must more than 20ms
}

void InitHX8238()
{
    ResetHX8238();

    WriteRegHX8238(0x0001);//Driver Output Control
    WriteDatHX8238(0x6300);//

    WriteRegHX8238(0x0002);//LCD-Driving-Waveform Control
    WriteDatHX8238(0x0200);//B/C=1,NW7-0=0
```

```
WriteRegHX8238(0x0003);//Power control 1
WriteDatHX8238(0x7166);//0x7664 0xa164

WriteRegHX8238(0x0004);//Input Data and Color Filter Control
WriteDatHX8238(0x0447);//SWD2-0=111,SEL2-0=000,

WriteRegHX8238(0x0005);//Function Control
WriteDatHX8238(0xBCD4);//0xbcd4 0xfcd4 0xb4d4

WriteRegHX8238(0x000A);//Contrast/Brightness Control
WriteDatHX8238(0x3F08);//0x4008

WriteRegHX8238(0x000B);//Frame Cycle Control
WriteDatHX8238(0xD400);//0xd400 0xc400 0xc470

WriteRegHX8238(0x000D);//Power Control 2
WriteDatHX8238(0x123A);//VLC63,0x123a 0x123f

WriteRegHX8238(0x000E);//Power control 3
WriteDatHX8238(0x3100);//VCOMA,0x2c00 0x3500 0x3000

WriteRegHX8238(0x000F);//Gate Scan Position
WriteDatHX8238(0x0000);

WriteRegHX8238(0x0016);//Horizontal Porch
WriteDatHX8238(0x9F86);

WriteRegHX8238(0x0017);//Vertical Porch
WriteDatHX8238(0x2212);

WriteRegHX8238(0x001E);//Power control 4
WriteDatHX8238(0x00E1);//VCOMH,0x00cb 0x00f2 0x00e0
```

}

◆ ELECTRO-OPTICAL CHARACTERISTICS

Driving condition: VDD=2.8V, I_{BL}=15mA/LED, Temperature =23°C±5°C, Humidity=60%±20%RH

| Item | Light angle (°) | Temp (°C) | Symbol | Specifications | | | Unit | Conditions | Note | | |
|--|-----------------|-----------|--------|----------------|---------------|-------|-------|-----------------------------|---|-----|---|
| | | | | Min. | Typ. | Max. | | | | | |
| Transmissive | 0 | 25 | - | - | 7.5 | - | % | (Equipment :BM-7/CS-200) | (1) | | |
| Contrast ratio | 0 | 25 | Cr | - | 584 | - | - | | (2) | | |
| Brightness | 0 | 25 | - | 150 | 250 | - | - | | - | | |
| Luminance uniformity (surface within panel) | 0 | 25 | Lu | 70 | 80 | - | % | | (3) | | |
| Cross talk | 0 | 25 | CTV | - | - | 20 | % | | (4) | | |
| Chromaticity | R x | 0 | 25 | Rx | 0.590 | 0.640 | 0.690 | - | - | | |
| | R y | | | Ry | 0.294 | 0.344 | 0.394 | | | | |
| | G x | | | Gx | 0.248 | 0.298 | 0.348 | | | | |
| | G y | | | Gy | 0.533 | 0.583 | 0.633 | | | | |
| | B x | | | Bx | 0.082 | 0.132 | 0.182 | | | | |
| | B y | | | By | 0.087 | 0.137 | 0.187 | | | | |
| | W x | | | Wx | 0.262 | 0.312 | 0.362 | | | | |
| | W y | | | Wy | 0.299 | 0.349 | 0.399 | | | | |
| Color Reproduction Area(NTSC) | | 0 | 25 | - | - | 60 | - | % | CIE1931(x,y) | (5) | |
| Response time | Tr | 0 | 25 | - | - | 15 | 20 | ms | Viewing normal angle $\theta_x = \theta_y = 0^0$ | - | |
| | Tf | | | | - | 35 | 50 | | | | |
| Viewing angle | Hor. | 0 | 25 | - | - | 45 | - | deg | Center CR≥10 | - | |
| | | | | | θ_{x-} | - | 45 | | | | - |
| | Ver. | | | | θ_{y+} | - | 15 | | | | - |
| | | | | | θ_{y-} | - | 35 | | | | - |

Note:

(1). Transmittance

Introduction

Transmittance (diffuse transmission factor) is a measure for the LCD panel transparency. The Light Source for this measurement is the accompanying LCD-module backlight system (LEDs, Lightguide...)

Measurement conditions:

| | |
|-----------------------------------|---|
| Measuring Equipment | BM-7/CS-200 |
| Measurement Point Diameter | 3mm |
| Measurement Point Location | Active Area Center Point |
| Light source | LCD module backlight |
| Reflectance Plate | Reflectance Standard(cal. plate) |
| Test pattern | All pixels white |
| Contrast setting | Maximum |

Measuring procedure:

Transmittance:

The light source is located at the backside of the panel.

- 1、 Measure the light source
- 2、 Place the LCD panel in front of the light source. Measure the luminance on the LCD panel surface

Definitions

$$\tau = \frac{Lv_{LCD-panel}}{Lv_{lightsource}} * 100\%$$

(2) **Definition of Contrast Ratio (C/R):** Ratio of gray max (Gmax) & gray min (Gmin) at the center point.

$$CR = \frac{G(Max)}{G(Min)}$$

Where

Gmax: Luminance with all pixels white

Gmin: Luminance with all pixels black

(3). **Surface luminance uniformity within panel**

Measurement conditions:

| | |
|-----------------------------------|--|
| Measuring Equipment | CS200 // BM-7 |
| Measurement Point Diameter | 3mm // 1mm |
| Measurement Point Location | Active Area |
| Light Source | Transmissive Mode: Internal (Backlight) |
| Test pattern | White |

Measuring procedure:

Measure the luminance L_i with the points in figure 1.

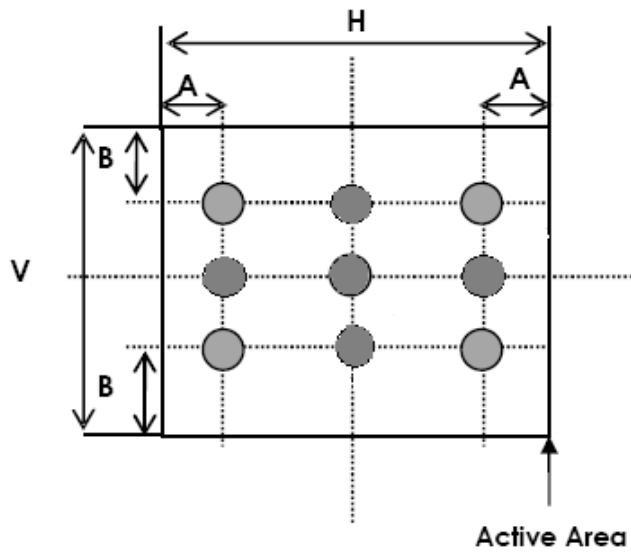


Figure 1

A: 5 mm B: 5 mm
H, V: Active Area

Uniformity value (L_u):

$$L_u = \frac{\max(L_i) - \min(L_i)}{\max(L_i)}$$

(4). CROSS-TALK

Introduction:


Crosstalk is an effect where the contrast of a display pixel is influenced by the state of the related pixels. A measure for this effect is the Cross Talk Value (CTV)

Measurement conditions:

| | |
|----------------------------|---|
| Measuring Equipment | CS200 // BM-7 |
| Measurement Point Diameter | 3mm // 1mm |
| Measurement Point Location | |
| Light Source | Transmissive Mode: Internal (Backlight) |
| Contrast setting | Maximum |

● **Test Pattern (valid for all greyscales):**

W: The width of the rectangle in the following pictures;

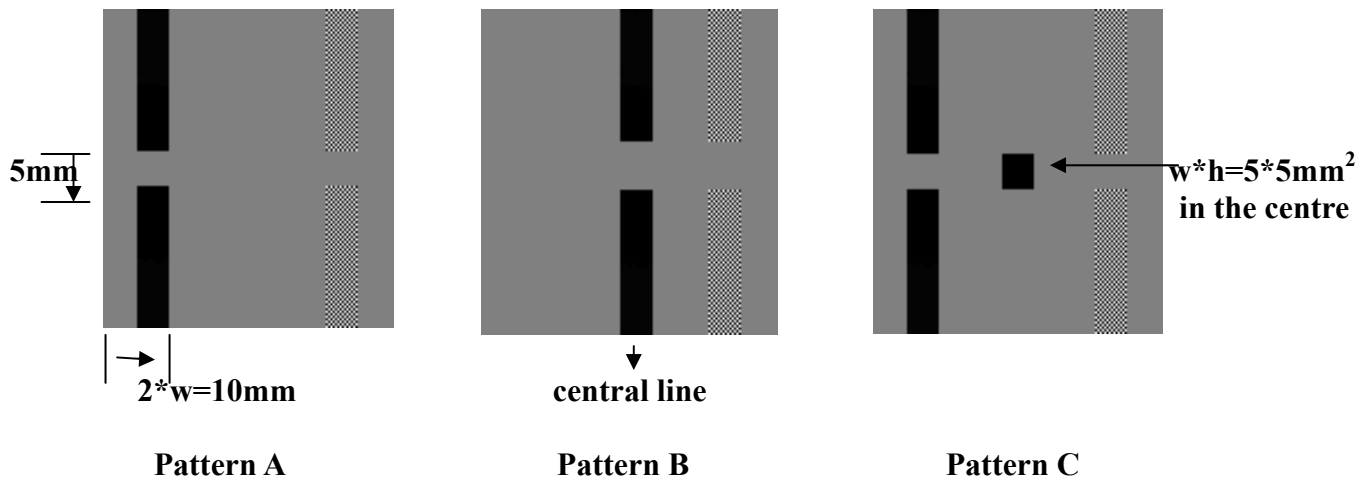

● **Definitions:**

Cross Talk Value:

$$CTV = |L_{vA} - L_{vB}| / L_{vA} * 100\%$$

Where:

L_{vA}: Luminance measured with the centre test point of pattern A

L_{vB}: Luminance measured with the centre test point of pattern B.

● **Measuring procedure:**

Adaptation of the display to the highest contrast ratio ($CR = L_{vA}/L_{vC}$) as defined by the test patterns and a test area of 14 x 14 dots.

Measurement of Luminance with test point A, B.

Determination of Crosstalk value (CTV)

(5). NTSC

Measurement conditions:

| | |
|---------------------------------|---|
| Measuring Equipment | LCD-5200 |
| Measuring Point Diameter | 3mm//1mm |
| Measuring point location | Active Area center point |
| Light source | Transmissive Mode: internal(Backlight) |
| Test pattern | All Pixels White Red.Green.Blue.White: Maximum colour saturation (maximum gradation level) |
| Contrast setting | Maximum |

Definitions

Panel colour coordinates according the CIE colour system (CIE 1931). In general, It is always requested to measure the X, Y and Z values.

Here u' , v' and L^* are according CIE 1931:

$$x' = \frac{4 \cdot X}{X + 15 \cdot Y + 3 \cdot Z}$$

$$y' = \frac{9 \cdot Y}{X + 15 \cdot Y + 3 \cdot Z}$$

$$L^* = 116 \cdot \left(\frac{Y}{Y_n} \right)^{1/3} - 16$$


Colour distance definition (maximum allowed colour distance to specified typical colour coordinate):

$$\Delta x' y' = \sqrt{\Delta x'^2 + \Delta y'^2}$$

Where:

$$\Delta x' = \text{Max} \left\{ \left| x'_{typ} - x'_{max} \right|, \left| x'_{typ} - x'_{min} \right| \right\}$$

$$\Delta y' = \text{Max} \left\{ \left| y'_{typ} - y'_{max} \right|, \left| y'_{typ} - y'_{min} \right| \right\}$$



Color Gamut definition:

$$F = \sqrt{s(s-a)(s-b)(s-c)} * 1000$$

Where

$$s = \frac{(a+b+c)}{2}$$

$$a = \sqrt{(x'_{blue} - x'_{red})^2 + (y'_{blue} - y'_{red})^2}$$

$$b = \sqrt{(x'_{blue} - x'_{green})^2 + (y'_{blue} - y'_{green})^2}$$

$$c = \sqrt{(x'_{red} - x'_{green})^2 + (y'_{red} - y'_{green})^2}$$




Color Gamut Ratio (NTSC) related to NTSC':

NTSC: =F (display)/F (NTSC')

NTSC' primaries:

| | x' | y' |
|--------------|-------------|-------------|
| Red | 0.67 | 0.33 |
| Green | 0.21 | 0.71 |
| Blue | 0.14 | 0.08 |

F (NTSC') =74.42

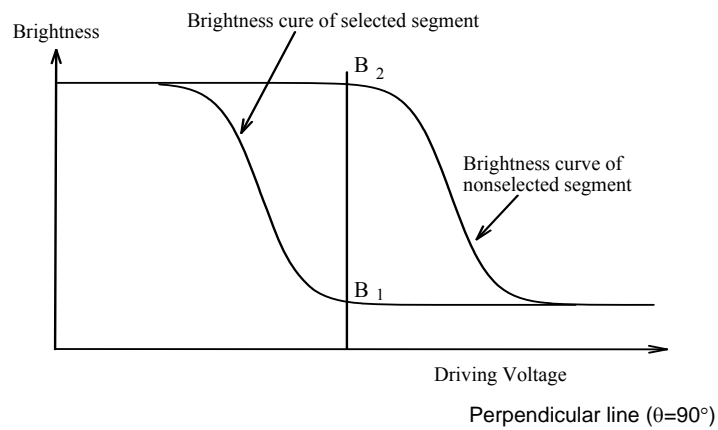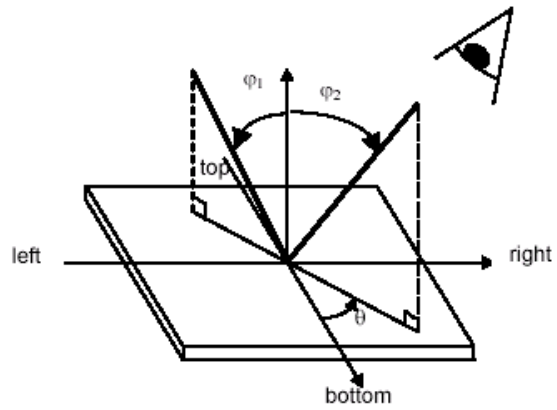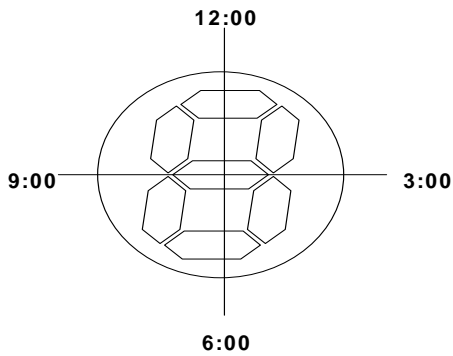

◆ SPECIFICATION OF QUALITY ASSURANCE

● Summary

The customer should check and accept the products of Palm Tech within one month after reception. This standard for quality assurance should affirm the quality of LCD products to supply to purchaser by Palm Technology Co., Ltd. Entire process is controlled according to ISO9001.

● Warranty period

Warranty period of this product is 12 months from manufacture code.

● Standard for quality test

- 1、 Inspection
Before delivering, the supplier should take the following test, and confirm the quality of product.
- 2、 Electro-Optical Characteristics
According to the individual specification to test the product.
- 3、 Test of Appearance Characteristics:
According to the individual specification to test the product.
- 4、 Test of Reliability Characteristics
According to the definition of reliability on specification for test product.
- 5、 Delivery Test
Before delivering, the supplier should take the delivery test
- 6、 Sampling Method: GB/T2828.1-2003, Level II
- 7、 The defects classify of AQL as following

Major defect : AQL=0.65

Minor defect:: AQL= 1.5

● Nonconforming Analysis & Deal With Manners

✧ Nonconforming Analysis

- 1、 Purchaser should supply the detail data of nonconforming sample and the non-suitable state.
- 2、 After accepting the detail data from purchaser ,the analysis of nonconforming should be finished in two weeks.
- 3、 If supplier can not finish analysis on time ,must announce purchaser before two weeks.

✧ Disposition of nonconforming

- 1、 If find any supplier defect during assembly line, supplier must change the good product for every defect after recognition.
- 2、 Both supplier and customer should analysis the reason and discuss the disposition of nonconforming when the reason of nonconforming is not sure.

● Agreement items.


Both sides should discuss together when the following problems happen:

- 1、 There is any problem of standard of quality assurance, and both sides think that must be modifier.
- 2、 There is any argument item which does not record in the quality assurance.
- 3、 Any other special problem.

● **Standard of the Product Appearance Test**


■ **Manner of appearance test**

- 1、 The test must be under 20W*2 or 40W fluorescent light ,and the distance of view must be at 30±5 cm;
- 2、 When test the model of Transmissive product must add the reflective plate.
- 3、 The test direction is base on about around 30 degree(within θ range)of vertical line, and the test time is below 5s.

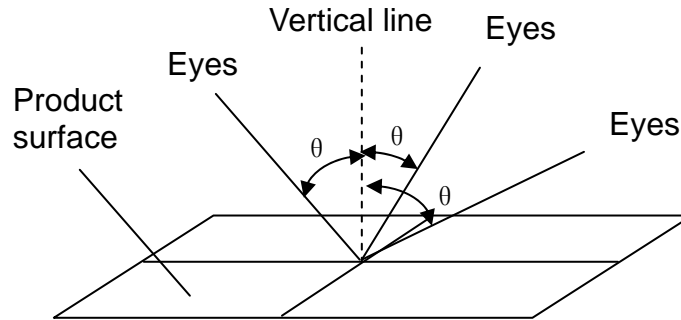

4、 Definition of Area:

- A Area: Active area
- B Area: Viewing area
- C Area: Out of viewing area
- D Area: Seal area

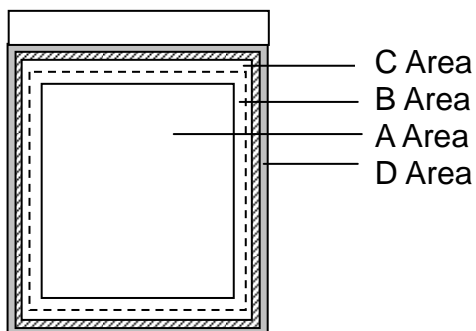



Note:

- A: Active Area is drawn in the drawing
- B: Viewing Area border is 2mm from Active Area border

■ **Basic principle:**

- 1、 It will accord to the AQL when the standard can not be described.
- 2、 The sample of the lowest acceptable quality level must be discussed by both supplier and customer when any dispute happened.
- 3、 Must add new item on time when it is necessary.

■ Inspection specification
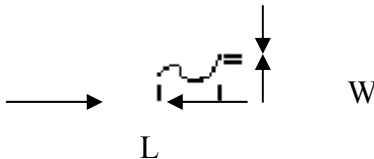
| NO | Item | Criterion | AQL | | | | | | | | | | | | | | | | | | | |
|---------------------------|--|--|--|-------|----------------|--------|---------------------------|------------------|--------|---|-------------------------|----------------------|--|-----------------------------------|------------|----------------------|--------------|-----|------------|-----|---|--|
| 01 | Electrical Testing | 1.1 Missing vertical, horizontal segment, segment contrast defect. 1.2 Missing character, dot or icon. 1.3 Display malfunction. 1.4 No function or no display. 1.5 Current consumption exceeds product specifications. 1.6 LCD viewing angle defect. 1.7 Contrast defect | 0.65 | | | | | | | | | | | | | | | | | | | |
| 02 | LCM black spots, white spots, bright spots, contamination, (display/non-display) | As following drawing $\Phi=(x+y)/2$  <table border="1" data-bbox="448 875 1385 1267"> <thead> <tr> <th></th> <th>Size</th> <th>Acceptable QTY</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td rowspan="4">Common dots defect</td> <td>$\Phi \leq 0.15$</td> <td>Ignore</td> <td>/</td> </tr> <tr> <td>$0.15 < \Phi \leq 0.25$</td> <td>2</td> <td>more than 5mm between two defects</td> </tr> <tr> <td>$0.25 < \Phi \leq 0.3$</td> <td>1</td> <td>/</td> </tr> <tr> <td>$0.3 < \Phi$</td> <td>0</td> <td>/</td> </tr> </tbody> </table> | | Size | Acceptable QTY | Remark | Common dots defect | $\Phi \leq 0.15$ | Ignore | / | $0.15 < \Phi \leq 0.25$ | 2 | more than 5mm between two defects | $0.25 < \Phi \leq 0.3$ | 1 | / | $0.3 < \Phi$ | 0 | / | 1.5 | | |
| | Size | Acceptable QTY | Remark | | | | | | | | | | | | | | | | | | | |
| Common dots defect | $\Phi \leq 0.15$ | Ignore | / | | | | | | | | | | | | | | | | | | | |
| | $0.15 < \Phi \leq 0.25$ | 2 | more than 5mm between two defects | | | | | | | | | | | | | | | | | | | |
| | $0.25 < \Phi \leq 0.3$ | 1 | / | | | | | | | | | | | | | | | | | | | |
| | $0.3 < \Phi$ | 0 | / | | | | | | | | | | | | | | | | | | | |
| 03 | Scratches, line type contamination (display/non-display) | As following drawing  <table border="1" data-bbox="464 1536 1326 1939"> <thead> <tr> <th>Length</th> <th>Width</th> <th>Acceptable QTY</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>---</td> <td>$W \leq 0.03$</td> <td>Ignore</td> <td>/</td> </tr> <tr> <td>$L \leq 3.5$</td> <td>$0.03 < W \leq 0.05$</td> <td>3</td> <td rowspan="2">More than 5mm between two defects</td> </tr> <tr> <td>$L \leq 3$</td> <td>$0.05 < W \leq 0.08$</td> <td>3</td> </tr> <tr> <td>---</td> <td>$0.08 < W$</td> <td>0</td> <td>/</td> </tr> </tbody> </table> | Length | Width | Acceptable QTY | Remark | --- | $W \leq 0.03$ | Ignore | / | $L \leq 3.5$ | $0.03 < W \leq 0.05$ | 3 | More than 5mm between two defects | $L \leq 3$ | $0.05 < W \leq 0.08$ | 3 | --- | $0.08 < W$ | 0 | / | |
| Length | Width | Acceptable QTY | Remark | | | | | | | | | | | | | | | | | | | |
| --- | $W \leq 0.03$ | Ignore | / | | | | | | | | | | | | | | | | | | | |
| $L \leq 3.5$ | $0.03 < W \leq 0.05$ | 3 | More than 5mm between two defects | | | | | | | | | | | | | | | | | | | |
| $L \leq 3$ | $0.05 < W \leq 0.08$ | 3 | | | | | | | | | | | | | | | | | | | | |
| --- | $0.08 < W$ | 0 | / | | | | | | | | | | | | | | | | | | | |

| | | | | | |
|---|--|---|-----------------------------------|--|-----|
| 04 | Polarizer bubbles | If bubbles are visible, judge using black spot specifications, not easy to find, must check in specify direction. | | | 1.5 |
| | | Size | Acceptable QTY | Remark | |
| | | $\Phi \leq 0.50$ | ignore | / | |
| | | $0.5 < \Phi \leq 1.0$ | 2 | More than 5mm between two defects | |
| | | $1.0 < \Phi$ | 0 | / | |
| 05 | TP black spots, white spots, concavo-convex spots, scratches (display/non-display) | 5.1 spots | | | 1.5 |
| | | Size | Acceptable QTY | | |
| | | $\Phi \leq 0.2$ | ignore | | |
| | | $0.2 < \Phi \leq 0.3$ | 2 | More than 5mm between two defects | |
| | | $0.3 < \Phi$ | 0 | | |
| | | 5.2 lines(not scratch): L:Length; W:Width | | | 1.5 |
| | $L \leq 10$ | $W \leq 0.05$ | Ignore | / | |
| | $L \leq 10$ | $0.05 < W \leq 0.10$ | 2 | More than 5mm between two defects | |
| | ----- | $0.1 < W$ | 0 | / | |
| | | 5.3 lines(scratch): L:Length; W:Width | | | 1.5 |
| | $W \leq 0.03$ | Ignore | / | | |
| | $L \leq 2.0, 0.03 < W \leq 0.05$ | 2 | More than 5mm between two defects | | |
| $L \leq 1.0, 0.05 < W \leq 0.1$ | 2 | | | | |
| $L \geq 2.0, W \geq 0.05$ or $L \geq 1.0, W \geq 0.1$ | 0 | / | | | |
| TP Newton's ring and Interference fringes | a: Area of Newton's ring and Interference fringes A: Whole TP surface $a \leq 1/2 * A$ | | | 1.5 | |
| TP Position disabled or losing | Not allowed | | | 1.5 | |

| | | | |
|----|--------------------|---|---|
| 06 | Backlight elements | <p>6.1 Illumination source flickers when lit.</p> <p>6.2 Spots or scratches that appear when lit must be judged using LCD spot, lines and contamination standards.</p> <p>6.3 Backlight doesn't light or color is wrong</p> | <p>0.65</p> <p>1.5</p> <p>0.65</p> |
| 07 | Soldering | <p>7.1 No unmelted solder paste may be present on the PCB.</p> <p>7.2 No cold solder joints, missing solder connections, oxidation or icicle.</p> <p>7.3 No residue or solder balls on PCB.</p> <p>7.4 No short circuits in components on PCB.</p> | <p>0.65</p> <p>0.65</p> <p>1.5</p> <p>0.65</p> |
| 08 | General appearance | <p>8.1 No oxidation, contamination, curves or, bends on interface pin (OLB) of FPC</p> <p>8.2 No cracks on interface pin(OLB) of FPC</p> <p>8.3 NO contamination, solder residue or solder balls on product.</p> <p>8.4 The IC on the FPC may not be damaged, circuits.</p> <p>8.5 The residual rosin or tin oil of soldering (component or chip component) is not burned into brown or black color.</p> <p>8.6 Sealant on top of the ITO circuit has not hardened</p> <p>8.7 Pin type must match type in specification sheet.</p> <p>8.8 LCD pin loose or missing pins.</p> <p>8.9 Product packaging must the same as specified on packaging specification sheet.</p> <p>8.10 Product dimension and structure must conform to product specification sheet.</p> | <p>1.5</p> <p>0.65</p> <p>1.5</p> <p>0.65</p> <p>1.5</p> <p>1.5</p> <p>0.65</p> <p>1.5</p> <p>1.5</p> |

◆ RELIABILITY

1. Environmental Test

| No | Test Item | Test Condition & Criteria | Sample Size | Determinant Stand. | | | | |
|--|---|--|--|--------------------|------|-------------------------|----|---|
| 1-1 | High Temperature Operation | Temperature: $70 \pm 3^\circ\text{C}$; Humidity: Except; Test method: Operation Duration: 96Hrs | Sample Do: $\geq 2\text{PCS}$ On Going: $\geq 3\text{PCS}/\text{LOT}$ | TS | | | | |
| 1-2 | Low temperature Operation | Temperature: $-20 \pm 3^\circ\text{C}$; Humidity: Except; Test method: Operation Duration: 96Hrs | Sample Do: $\geq 2\text{PCS}$ On Going: $\geq 3\text{PCS}/\text{LOT}$ | TS | | | | |
| 1-3 | High Temperature / High Humidity Operation | Temperature: $60 \pm 3^\circ\text{C}$; Humidity: $95\% \pm 3\% \text{RH}$; Test method: Operation Duration: 96Hrs | Sample Do: $\geq 2\text{PCS}$ On Going: $\geq 3\text{PCS}/\text{LOT}$ | TS | | | | |
| 1-4 | Temperature Shock | Shock Temperature & Time: <p>Duration: 20cycle</p> | Sample Do: $\geq 2\text{PCS}$ On Going: $\geq 3\text{PCS}/\text{LOT}$ | TS | | | | |
| 1-5 | Temperature Cycle | Normal temperature 2H \rightarrow $-30 \pm 3^\circ\text{C}$, 10H(3H) \rightarrow $60 \pm 3^\circ\text{C}$, $90 \pm 3\% \text{RH}$ 10H(3H) \rightarrow $80 \pm 3^\circ\text{C}$, 10H(2H) \rightarrow (25°C) 5 cycles | Sample Do: $\geq 2\text{PCS}$ On Going: $\geq 3\text{PCS}/\text{LOT}$ | TS | | | | |
| <table border="1"> <thead> <tr> <th>Item</th> <th>FAULT JUDGMENT CRITERIA</th> </tr> </thead> <tbody> <tr> <td>TS</td> <td>1. No clearly visible defects or deterioration of display quality allowed. 2. No function – related abnormalities.</td> </tr> </tbody> </table> | | | | | Item | FAULT JUDGMENT CRITERIA | TS | 1. No clearly visible defects or deterioration of display quality allowed. 2. No function – related abnormalities. |
| Item | FAULT JUDGMENT CRITERIA | | | | | | | |
| TS | 1. No clearly visible defects or deterioration of display quality allowed. 2. No function – related abnormalities. | | | | | | | |

NOTE:

- When temperature moves, LCD's valve voltage will be influenced by it, which leads to LCD's contrast and chroma change.
- In high temperature operation and storage tests in MQE test will make LCD's power consumption increase. The reason is that a few crystal molecules are apart because of high temperature when there is a long time storage and operation in high temperature, which leads to decrease of gross resistance ratio of crystal molecules. Hence, LCD's power consumption go up than that of before test.

2. Mechanical Reliability Test

| No. | Test Item | Test Condition& Criteria | Sample Size | Determinant Spec. |
|-----|-----------|--|-------------|-------------------|
| 2-1 | ESD test | Discharge modality: Contact voltage:±1KV、 ±2KV; Air voltage: ±2KV、 ±4KV、 ±6KV; (Discharge R=330Ω;C=150PF) | 2PCS | No software error |

3. Soldering

- (1) Soldering temperature: 340+/-10°C.
- (2) Available times for repeated soldering: 5 times
- (3) Attentions paid when soldering:
 - A. FPC's golden finger and soldering pad are butt-jointed before soldered. Tolerance is within the 1/3 width of golden finger and 0.5~1mm of FPC's length is allowed to be exposed in the jointed soldering pad.
 - B. Coat proper tin in the iron-head when soldering, with dragging speed of 2.5cm/sec.
 - C. The soldering part is warmed up first with iron-head when there is a rework. Then heat it up from one side until tin is melted, last, take off FPC.

4. FPC cable flexing and bending test

- Number of Bending / Flexing Cycles: <10 times
Radius of the Bend Mandrels: >0.4 mm
Degree of Bend: <180°

◆ SUGGESTIONS FOR USING LCD MODULES

● Handling of LCM

- (1) The LCD screen is made of glass. Don't give excessive external shock, or drop from a high place.
- (2) If the LCD screen is damaged and the liquid crystal leaks out, do not lick and swallow. When the liquid is attach to your hand, skin, cloth etc, wash it off by using soap and water thoroughly and immediately.
- (3) Don't apply excessive force on the surface of the LCM.
- (4) If the surface is contaminated, clean it with soft cloth. If the LCM is severely contaminated, use Isopropyl alcohol/Ethyl alcohol to clean. Other solvents may damage the polarizer. The following solvents are especially prohibited: water, ketone Aromatic solvents etc.
- (5) Exercise care to minimize corrosion of the electrode. Corrosion of the electrodes is accelerated by water droplets, moisture condensation or a current flow in a high-humidity environment.
- (6) Install the LCD Module by using the mounting holes. When mounting the LCD module make sure

it is free of twisting, warping and distortion. In particular, do not forcibly pull or bend the I/O cable or the backlight cable.

(7) Don't disassemble the LCM.

(8) To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

- Be sure to ground the body when handling the LCD modules.
- Tools required for assembling, such as soldering irons, must be properly grounded.
- To reduce the amount of static electricity generated, do not conduct assembling and other work under dry conditions.
- The LCD module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated.

(9) Do not alter, modify or change the shape of the tab on the metal frame.

(10) Do not make extra holes on the printed circuit board, modify its shape or change the positions of components to be attached.

(11) Do not damage or modify the pattern writing on the printed circuit board.

(12) Absolutely do not modify the zebra rubber strip (conductive rubber) or heat seal connector

(13) Except for soldering the interface, do not make any alterations or modifications with a soldering iron.

(14) Do not drop, bend or twist LCM.


(15) If the LCM is assembled with touch panel, pay more attention to using touch panel.

* Please wear clean finger sacks, gloves and mask to protect the products from fingerprint or stain attach, and also hold the portion outside the view area when handling the panel.


* Please use finger sacks or gloves to avoid injuries by sharp edges when handling the Film-Glass type touch panel because a glass edges are not chamfered.

* Cautions for installing and assembling


- Do not give excessive strain to the product.
- Flexible pattern cable is connected to the TP body by heat-seal(thermal pressure) method. So, do not apply excessive forces to the flexible pattern.
- In order not to apply load on the surface of the touch panel, please keep a clearance of 0.2mm-0.5mm between product and case.
- Pressing inside of boundary of the frame(part(A) as shown in below) may cause fault operation, so please design to avoid pressing of touch panel at part (A) such as having gasket/cushion at part (C). Particularly the area (B) shall be free from burr. The gasket/cushion material at the part (C) should not be exceeded to inside of the boundary of the frame.

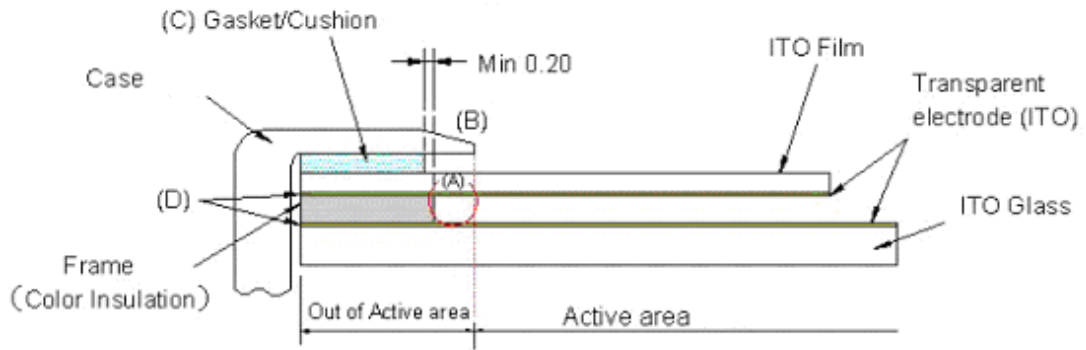


Do not make the following mistakes:

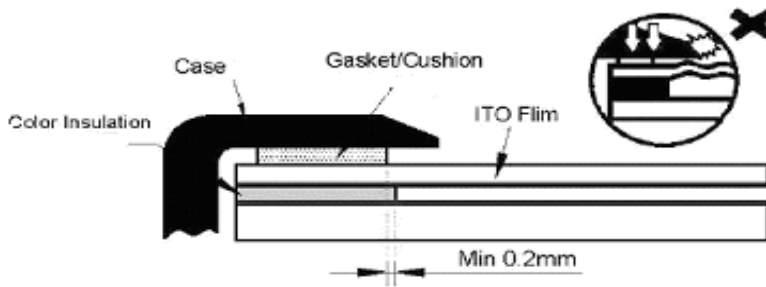


- When designing installment of case and touch panel, you would better consider to keep clearance of 0.2-0.3mm between touch panel and inside boundary of case.

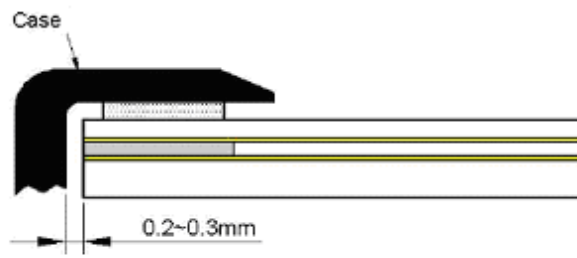

- Please keep your case flat in order not to touch with touch panel directly which causes serious damage of a transparent electrode.

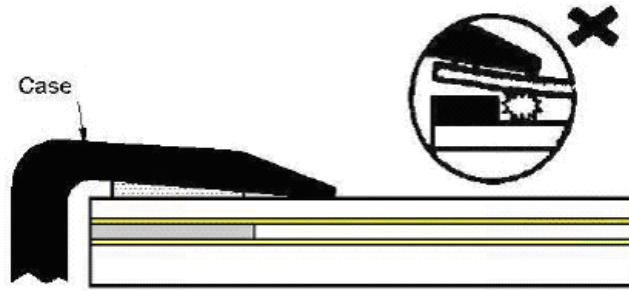

- Do not use any organic solvent or detergent other than ethanol.
- The corners of the product are not chamfered. When positioning and fixing the product on the case, we suggest that you would provide a R part on the corner of the case so as not to apply load on the corner of the transparent touch panel.

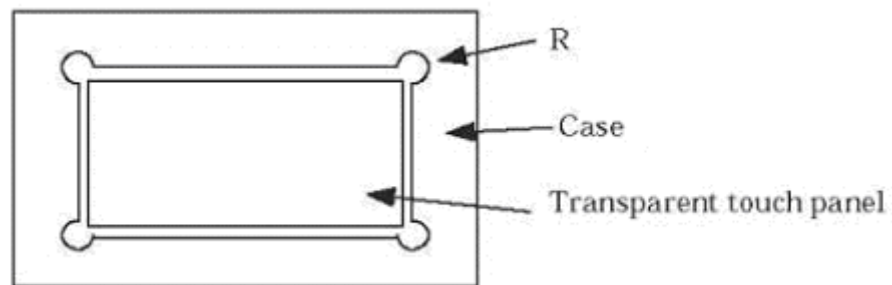

- Please confirm its characteristic in advance whether any damage is given to this product when attaching a protection sheet on this product at customer side. Some changes may arise in the characteristics of this product by the protection sheet attachment such as operation, cosmetic, etc.. However, those changes are out of our guarantee.

● **Storage**


- (1) Store in an ambient temperature of 5 to 45 °C, and in a relative humidity of 40% to 60%. Don't expose to sunlight or fluorescent light.
- (2) Storage in a clean environment, free from dust, active gas, and solvent.
- (3) Store in antistatic container.

◆ PACKING


● Packing Materials

| NO. | ITEM | Dimension(LXWXH) (mm) | Quantity |
|-----|--------|-----------------------|----------|
| 1 | Tray | 424X295X10 | TBD |
| 2 | Carton | 437X307X163 | TBD |


● Packing Method

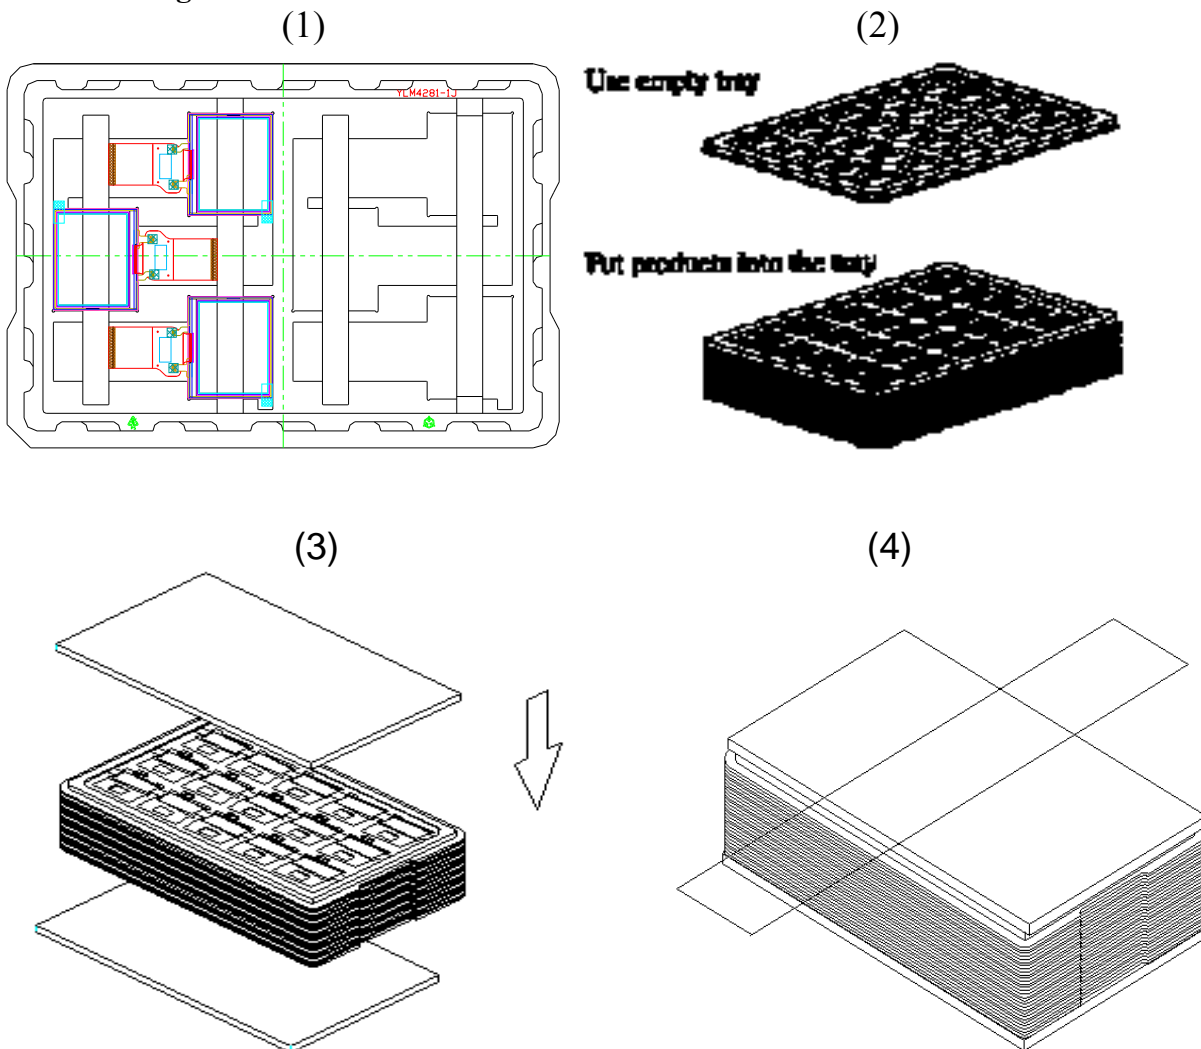


(5)

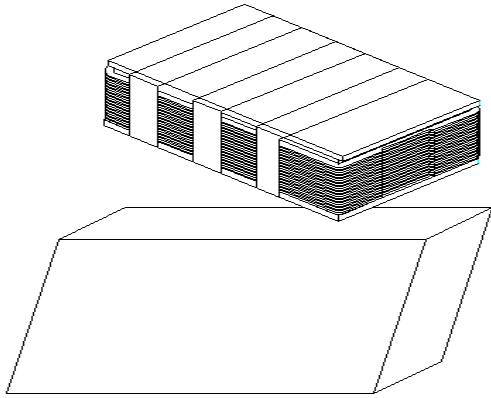


(6)

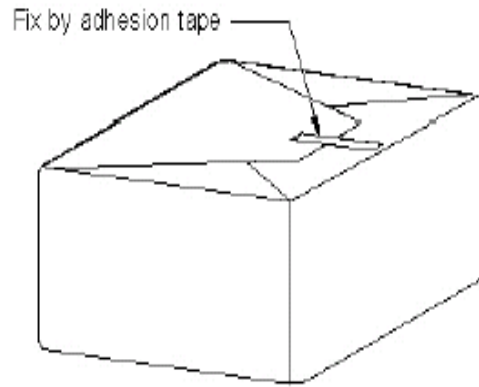

(7)

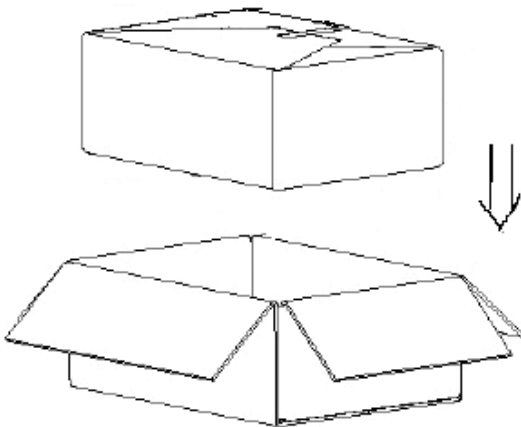

(8)

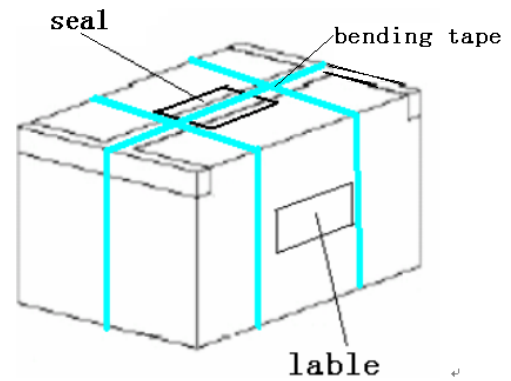

- (1). Put module into tray cavity :
- (2). Tray stacking
- (3). Put 1 cardboard under the tray stack and 1 cardboard above:
- (4). Fix the cardboard to the tray stack with adhesive tape:
- (5). Put the tray stack and 4 pcs desiccant into the LDPE bag
- (6). Fix the LDPE bag with adhesive tape:
- (7). Put LDPE bag with tray stack into carton.:
- (8). Carton sealing with adhesive tape.