

Silicon NPN Power Transistors

2SD2553

DESCRIPTION

www.datasheet4u.com

- With TO-3P(H)IS package
- High voltage;high speed
- Low saturation voltage
- Bult-in damper diode

APPLICATIONS

- Horizontal deflection output for high resolution display,color TV
- High speed switching applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

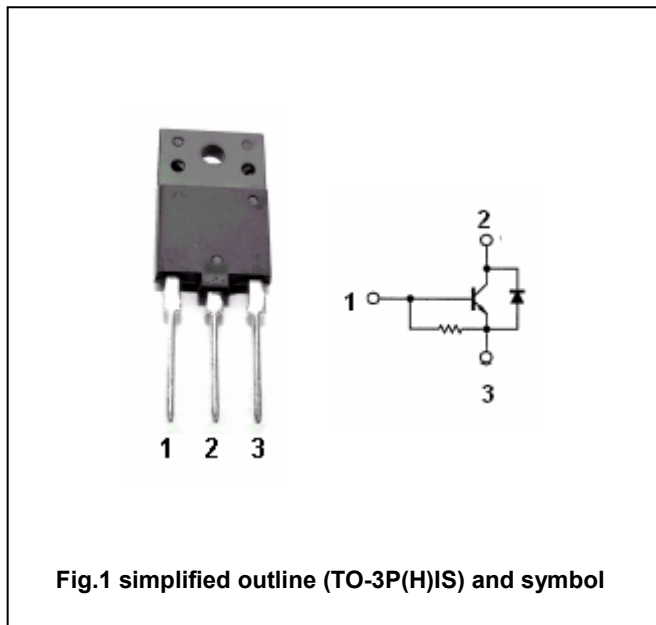


Fig.1 simplified outline (TO-3P(H)IS) and symbol

Absolute maximum ratings(Ta=25°C)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	Open emitter	1200	V
V _{CEO}	Collector-emitter voltage	Open base	600	V
V _{EBO}	Emitter-base voltage	Open collector	5	V
I _C	Collector current		8	A
I _{CM}	Collector current-peak		16	A
I _B	Base current		4	A
P _C	Total power dissipation	T _C =25°C	50	W
T _j	Junction temperature		150	°C
T _{stg}	Storage temperature		-55~150	°C

Silicon NPN Power Transistors

2SD2553

CHARACTERISTICS

www.datasheet4u.com

 $T_j=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_C=400\text{mA}; I_B=0$	5			V
V_{CEsat}	Collector-emitter saturation voltage	$I_C=6\text{A}; I_B=1.2\text{A}$			5	V
V_{BEsat}	Base-emitter saturation voltage	$I_C=6\text{A}; I_B=1.2\text{A}$		0.9	1.2	V
I_{CBO}	Collector cut-off current	$V_{CB}=1200\text{V}; I_E=0$			1	mA
I_{EBO}	Emitter cut-off current	$V_{EB}=5\text{V}; I_C=0$	66		200	mA
h_{FE-1}	DC current gain	$I_C=1\text{A}; V_{CE}=5\text{V}$	8		28	
h_{FE-2}	DC current gain	$I_C=6\text{A}; V_{CE}=5\text{V}$	5		9	
V_F	Diode forward voltage	$I_F=8\text{A}$		1.6	2.0	V
C_{ob}	Collector output capacitance	$I_E=0; V_{CB}=10\text{V}, f=1\text{MHz}$		155		pF
f_T	Transition frequency	$I_C=0.1\text{A}; V_{CE}=10\text{V}$		2		MHz

Switching times :


t_s	Storage time	$I_{CP}=6\text{A}; I_{B1}=1.5\text{A}$ $f_H=15.75\text{kHz}$		9	12	μs
t_f	Fall time			0.3	0.7	μs

Silicon NPN Power Transistors

2SD2553

PACKAGE OUTLINE

www.datasheet4u.com

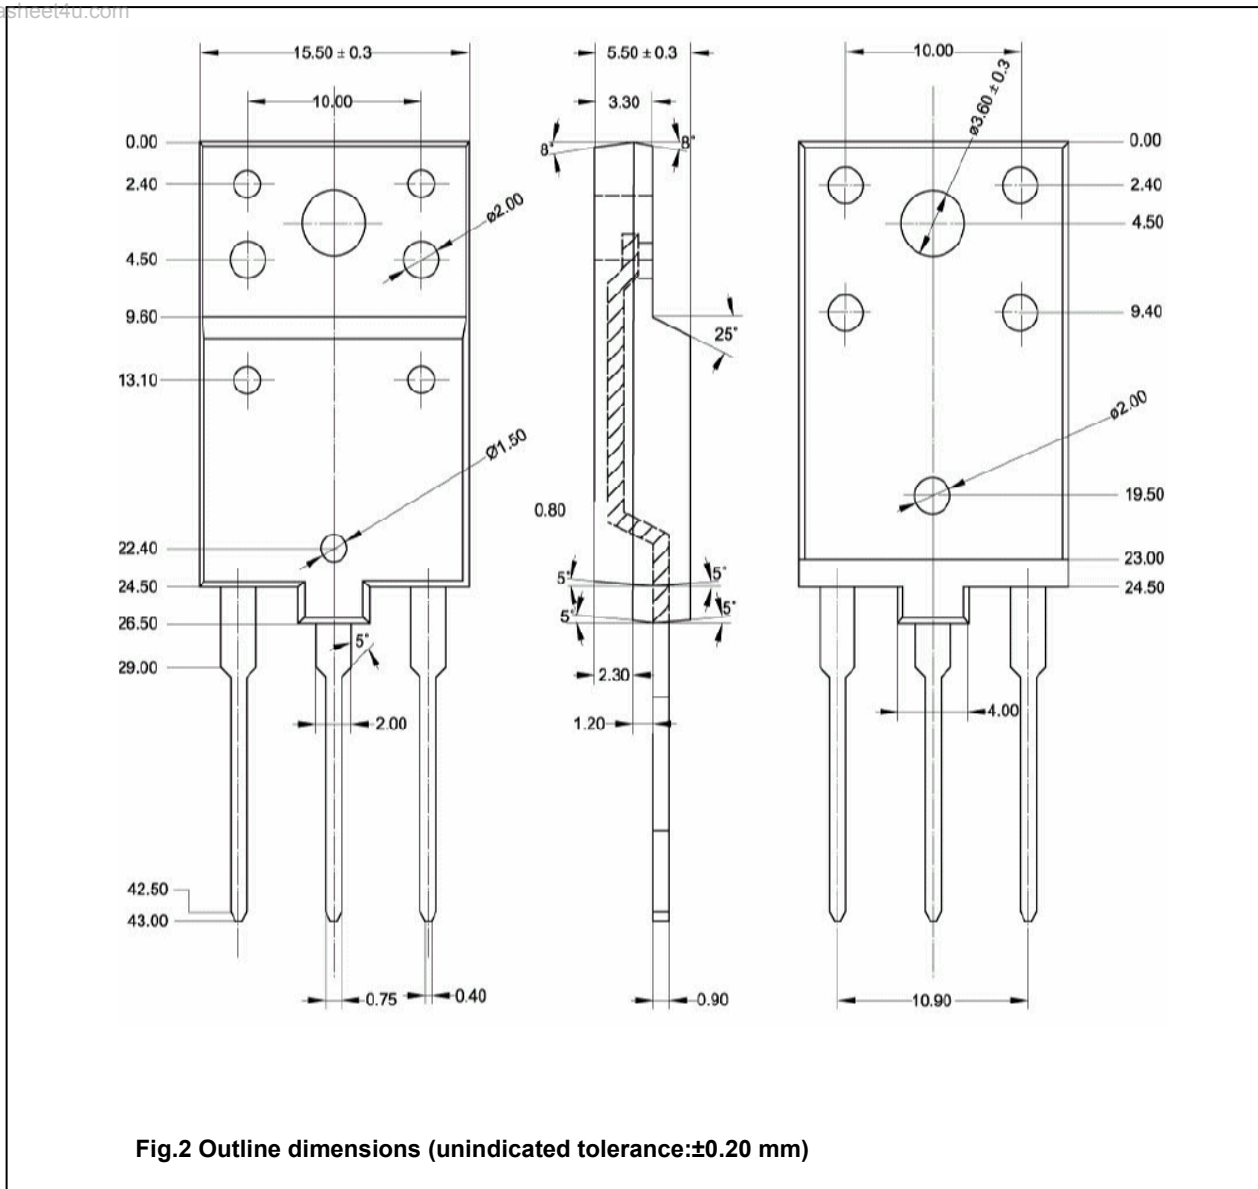

Silicon NPN Power Transistors

2SD2553

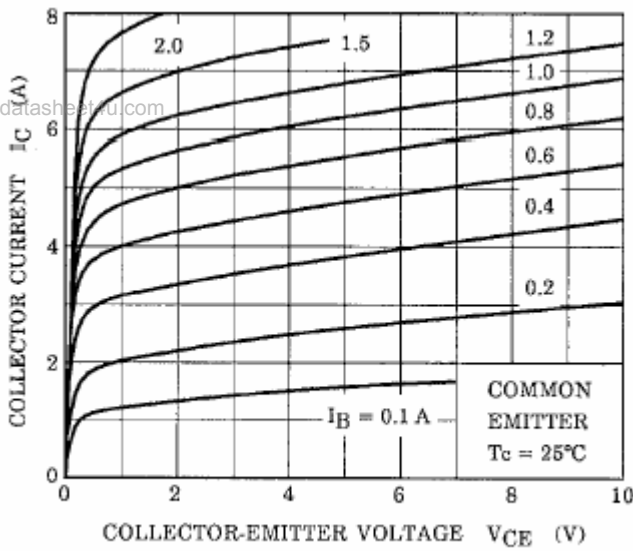


Fig.3 Static Characteristic

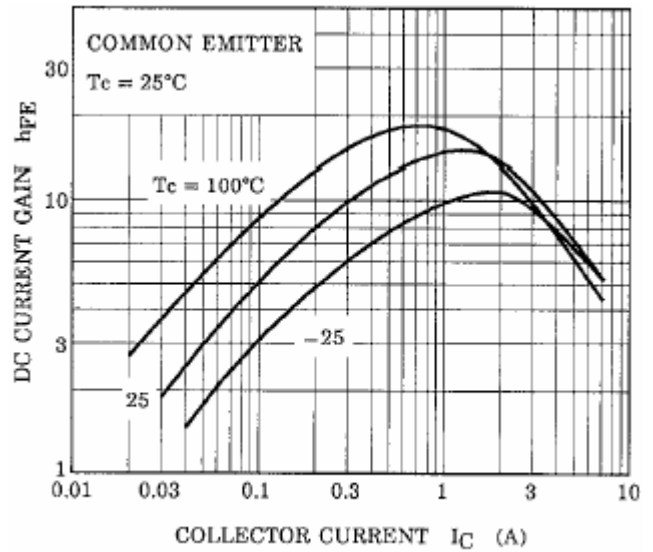


Fig.4 DC current Gain

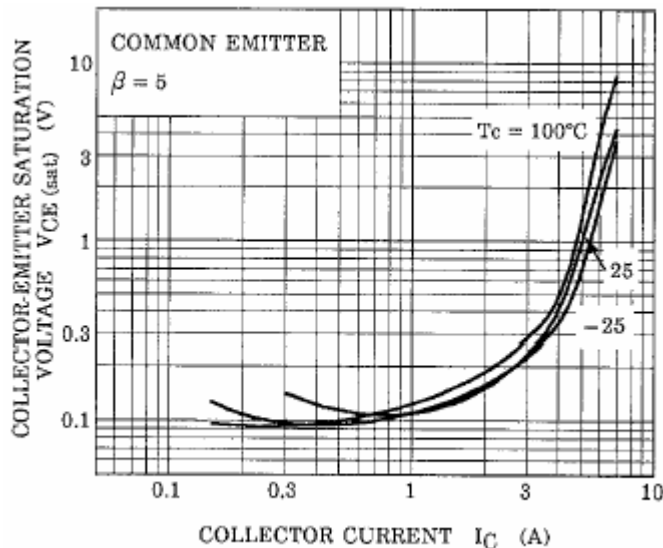


Fig.5 Collector-Emitter Saturation Voltage

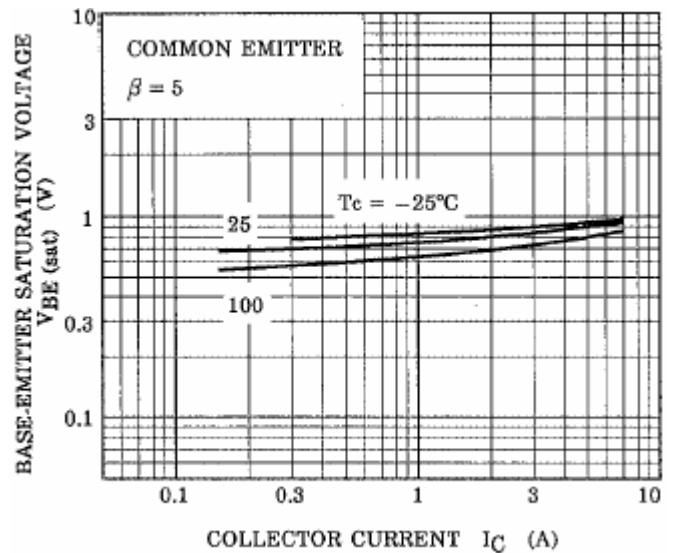


Fig.6 Base-Emitter Saturation Voltage

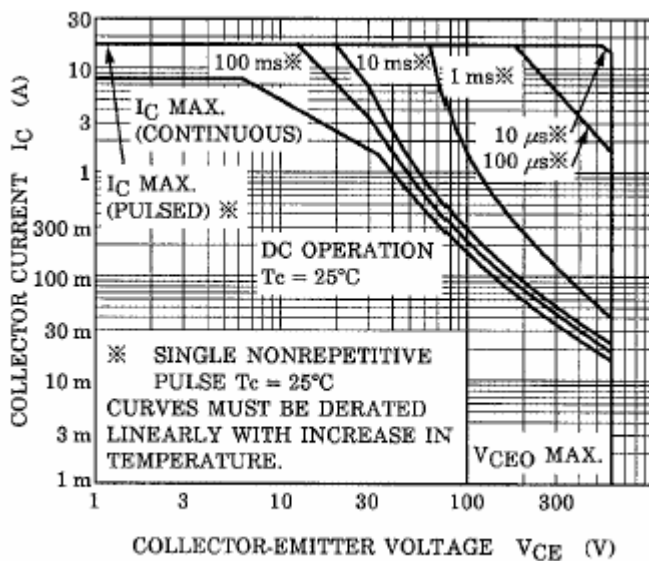


Fig.7 Safe Operating Area