



FEATURES/BENEFITS

- Enhanced N channel FET with no inherent diode to V_{CC}
- 5Ω bidirectional switches connect inputs to outputs
- Pin compatible with the 74F257, 74FCT257, and 74FCT257T
- Zero propagation delay, zero ground bounce
- TTL-compatible control inputs
- Undershoot clamp diodes on all switch and control pins
- Available in SOIC (S1), QSOP
- QS32257 is 25Ω version for low noise

APPLICATIONS


- Logic replacement
- Video, audio, graphics switching, muxing
- Hot-swapping, hot-docking
(Application Note AN-13)
- Voltage translation
(5V to 3.3V; Application Note 11)
- Bus funneling

DESCRIPTION

The QS3257 is a high-speed CMOS LVTTTL-compatible Quad 2:1 multiplexer/demultiplexer. The QS3257 is a function and pinout compatible QuickSwitch version of the 74F257, 74FCT257, and the 74ALS/AS/LS257 Quad 2:1 multiplexers. The low ON resistance of the QS3257 allows inputs to be connected to outputs without adding propagation delay and without generating additional ground bounce noise. The QS32257 has 25Ω series resistors to reduce ground bounce noise.

Mux/Demux devices provide an order of magnitude faster speed than equivalent logic devices.

FUNCTIONAL BLOCK DIAGRAM

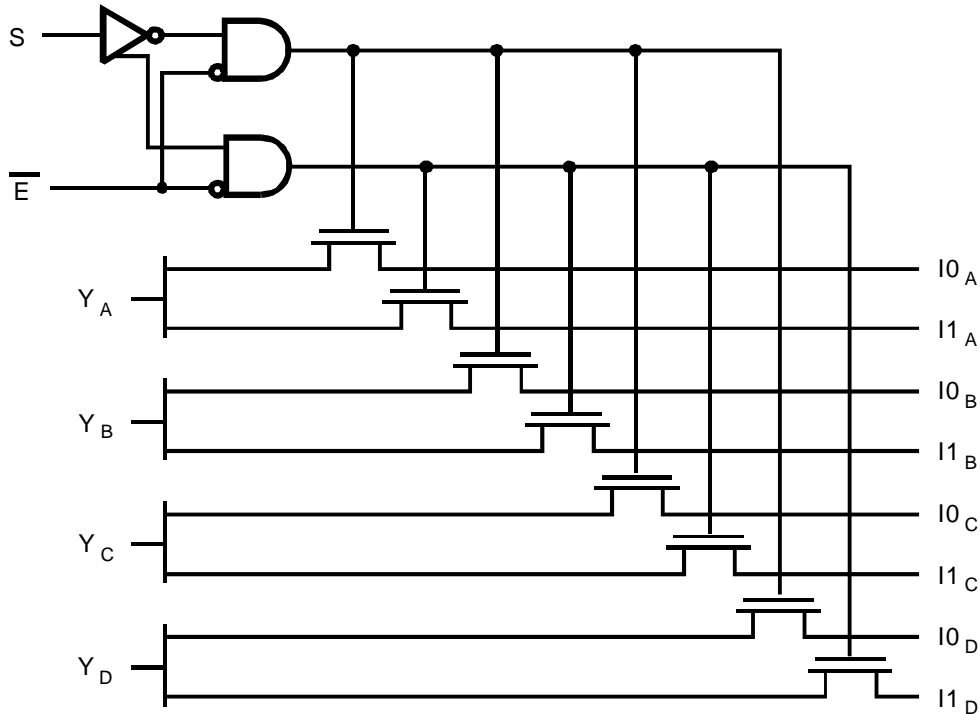


PIN DESCRIPTION

Name	I/O	Description
Ixx	I	Data Inputs
S	I	Select Input
\bar{E}	I	Enable Input
Y _A -Y _D	O	Data Outputs

PIN CONFIGURATION

(ALL PINS TOP VIEW)

SOIC (S1), QSOP

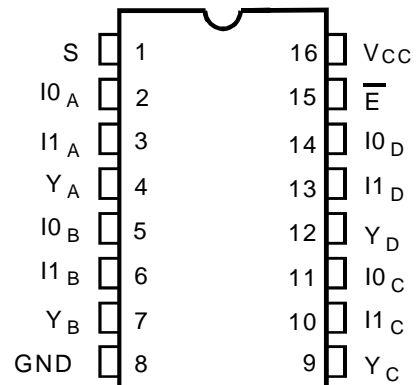

FUNCTION TABLE

Inputs		Outputs				Function
\bar{E}	S	Y _A	Y _B	Y _C	Y _D	
H	X	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Disable
L	L	I0 _A	I0 _B	I0 _C	I0 _D	Select 0
L	H	I1 _A	I1 _B	I1 _C	I1 _D	Select 1

ABSOLUTE MAXIMUM RATINGS

Supply Voltage to Ground	-0.5V to +7.0V
DC Switch Voltage V _S	-0.5V to +7.0V
DC Input Voltage V _{IN}	-0.5V to +7.0V
AC Input Voltage (for a pulse width ≤ 20ns)	-3.0V
DC Output Current Max. Sink Current/Pin	120mA
Maximum Power Dissipation	0.5 watts
T _{STG} Storage Temperature	-65° to +150°C

Note: ABSOLUTE MAXIMUM CONTINUOUS RATINGS are those values beyond which damage to the device may occur. Exposure to these conditions or conditions beyond those indicated may adversely affect device reliability. Functional operation under absolute-maximum conditions is not implied.

CAPACITANCE

T_A = 25°C, f = 1MHz, V_{IN} = 0V, V_{OUT} = 0V

Pins		SOIC, QSOP		Unit
		Typ	Max	
Control Inputs		4	5	pF
QuickSwitch Channels (Switch OFF)	Demux	5	7	pF
	Mux	8	9	pF

Note: Capacitance is guaranteed, but not production tested and are typical values. For total capacitance while the switch is ON, please see Section 1 under "Input and Switch Capacitance."


DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Commercial $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, $V_{CC} = 5.0\text{V} \pm 5\%$, Military: $T_A = -55^{\circ}\text{C}$ to 125°C , $V_{CC} = 5.0\text{V} \pm 10\%$

Symbol	Parameter	Test Conditions	Min	Typ ⁽¹⁾	Max	Unit	
V_{IH}	Input HIGH Voltage	Guaranteed Logic HIGH for Control Pins	2.0	—	—	V	
V_{IL}	Input LOW Voltage	Guaranteed Logic LOW for Control Pins	—	—	0.8	V	
$ I_{IN} $	Input Leakage Current (Control Inputs)	$0\text{V} \leq V_{IN} \leq V_{CC}$	—	—	1	μA	
$ I_{OZ} $	Off-State Current (Hi-Z)	$0\text{V} \leq V_{OUT} \leq V_{CC}$	—	—	1	μA	
R_{ON}	Switch On Resistance ⁽²⁾	$V_{CC} = \text{Min.}, V_{IN} = 0.0\text{V}$ $I_{ON} = 30\text{mA}$	QS3257	—	5	7	Ω
			QS32257	20	28	40	
R_{ON}	Switch On Resistance ⁽²⁾	$V_{CC} = \text{Min.}, V_{IN} = 2.4\text{V}$ $I_{ON} = 15\text{mA}$	QS3257	—	10	15	Ω
			QS32257	20	35	48	
V_P	Pass Voltage ⁽³⁾	$V_{IN} = V_{CC} = 5\text{V}, I_{OUT} = -5\mu\text{A}$	3.7	4	4.2	V	

- Notes:
1. Typical values indicate $V_{CC} = 5.0\text{V}$ and $T_A = 25^{\circ}\text{C}$.
 2. For a diagram explaining the procedure for R_{ON} measurement, please see Section 1 under "DC Electrical Characteristics." R_{ON} guaranteed, but not production tested.
 3. Pass voltage is guaranteed, but not production tested.

TYPICAL ON RESISTANCE VS. V_{IN} AT $V_{CC} = 5.0\text{V}$ (QS3257)

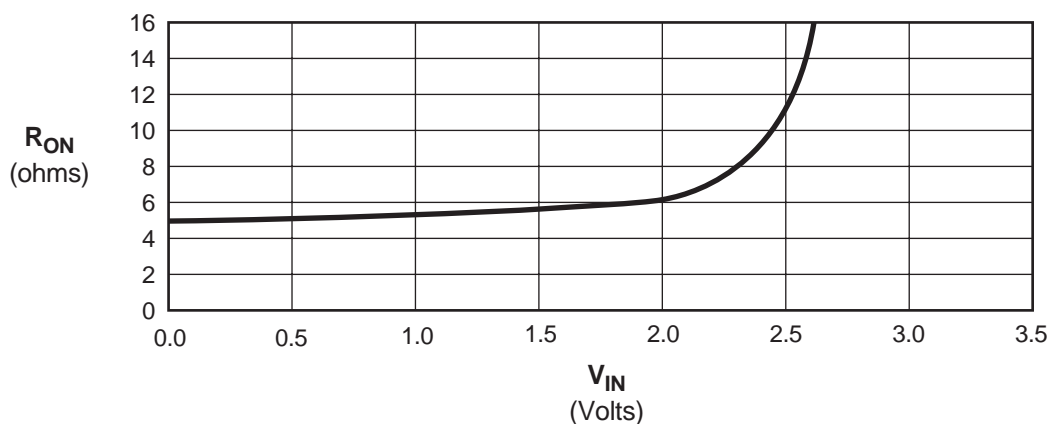

Note: For QS32257, add 23Ω to R_{ON} shown.

POWER SUPPLY CHARACTERISTICS OVER OPERATING RANGE

$T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, $V_{CC} = 5.0\text{V} \pm 5\%$

Symbol	Parameter	Test Conditions ⁽¹⁾	Max	Unit
I_{CC0}	Quiescent Power Supply Current	$V_{CC} = \text{Max.}, V_{IN} = \text{GND or } V_{CC}, f = 0$	3.0	μA
ΔI_{CC}	Power Supply Current ⁽²⁾ per Input HIGH	$V_{CC} = \text{Max.}, V_{IN} = 3.4\text{V}, f = 0$ per control input	1.5	mA
Q_{CCD}	Dynamic Power Supply Current per MHz ⁽³⁾	$V_{CC} = \text{Max.}, I$ and Y Pins Open, Control Inputs Toggling @ 50% Duty Cycle	0.25	mA/MHz

Notes:

1. For conditions shown as Min. or Max., use the appropriate values specified under DC specifications.
2. Per TTL driven-input ($V_{IN} = 3.4\text{V}$, control inputs only). I and Y pins do not contribute to ΔI_{CC} .
3. This parameter applies to the control inputs only and represents the current required to switch internal capacitance at the specified frequency. The I and Y inputs generate no significant AC or DC currents as they transition. This parameter is guaranteed, but not production tested.

SWITCHING CHARACTERISTICS OVER OPERATING RANGE

$T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, $V_{CC} = 5.0\text{V} \pm 5\%$

$C_{LOAD} = 50\text{pF}$, $R_{LOAD} = 500\Omega$ unless otherwise noted.

Symbol	Description ⁽¹⁾	QS3257			QS32257			Unit
		Min	Typ	Max	Min	Typ	Max	
t_{PLH} t_{PHL}	Data Propagation Delays ^(2,3) In to Y	—	—	0.25 ⁽³⁾	—	—	1.25 ⁽³⁾	ns
t_{PZH} t_{PZL}	Switch Turn-on Delay Sn to Y	0.5	—	5.2	0.5	—	6.2	ns
t_{PZH} t_{PZL}	Switch Turn-on Delay $\overline{\text{En}}$ to Y	0.5	—	4.8	0.5	—	5.8	ns
t_{PHZ} t_{PLZ}	Switch Turn-off Delay ⁽²⁾ $\overline{\text{En}}$ to Y, Sn to Y	0.5	—	5.0	0.5	—	5.0	ns

Notes:

1. See Test Circuit and Waveforms. Minimums guaranteed, but not production tested.
2. This parameter is guaranteed, but not production tested.
3. The bus switch contributes no propagation delay other than the RC delay of the ON resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.25ns for QS3257 and 1.25ns for QS32257 for $C_L = 50\text{pF}$. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagation delay to the system. Propagation delay of the bus switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.



CORPORATE HEADQUARTERS
2975 Stender Way
Santa Clara, CA 95054

for SALES:
800-345-7015 or 408-727-6116
fax: 408-492-8674
www.idt.com*

*To search for sales office near you, please click the sales button found on our home page or dial the 800# above and press 2.
The IDT logo is a registered trademark of Integrated Device Technology, Inc.