

- Ideal Front-End Filter for European Wireless Receivers
- Low-Loss, Coupled-Resonator Quartz Design
- Simple External Impedance Matching
- Complies with Directive 2002/95/EC (RoHS)




The RF1172C is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 433.92 MHz receivers. Receiver designs using this filter include superhet with 10.7 MHz or 500 kHz IF, direct conversion and superregen. Typical applications of these receivers are wireless remote-control and security devices operating in Europe under ETSI I-ETS 300 220.

This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. RFM's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching.

RF1172C

433.92 MHz SAW Filter



Electrical Characteristics

Characteristic		Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency at 25°C	Absolute Frequency	f _c	1, 2		433.92		MHz
	Tolerance from 433.92 MHz	Δf_{C}	1, 2			±160	kHz
Insertion Loss		IL	1		3.0	5.0	dB
3 dB Bandwidth		BW ₃	1, 2	500	600	800	kHz
Rejection	at f _c - 21.4 MHz (Image)			40	50		
	at f _c - 10.7 MHz (LO)		1	30	40		dB
	Ultimate			_	80		
Temperature	Operating Case Temp.	T _C	2.4	-40		+85	°C
	Turnover Temperature	T _O		15	25	35	°C
	Turnover Frequency	f _O	3, 4		f _c		MHz
	Freq. Temp. Coefficient	FTC			0.032		ppm/°C ²
Frequency Aging	Absolute Value during the First Year	fA	5		≤10		ppm/yr
Impedance @ fc	Input $Z_{IN} = R_{IN}IIC_{IN}$	Z _{IN}	1	212 Ω II 3.1 pF 212 Ω II 3.1 pF			
	Output $Z_{OUT} = R_{OUT}IIC_{OUT}$	Z _{OUT}	'				
Lid Symbolization (Y=year WW=week S=shift)		409 // YWWS					
Standard Reel Quantity	Reel Size 7 Inch		9	500 Pieces/Reel			
	Reel Size 13 Inch		9	3000 Pieces/Reel			



CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

Notes:

- 1. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture which is connected to a $50\,\Omega$ test system with VSWR $\leq 1.2:1$. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f_c . Note that insertion loss and bandwidth and passband shape are dependent on the impedance matching component values and quality.
- 2. The frequency f_c is defined as the midpoint between the 3dB frequencies.
- 3. Where noted specifications apply over the entire specified operating temperature range.
- 4. The turnover temperature, T_O , is the temperature of maximum (or turnover) frequency, f_O . The nominal frequency at any case temperature, T_C , may be calculated from: $f = f_O [1 FTC (T_O T_C)^2]$.
- 5. Frequency aging is the change in fc with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing significantly in subsequent years.
- 6. The design, manufacturing process, and specifications of this device are subject to change.
- 7. One or more of the following U.S. Patents apply: 4,54,488, 4,616,197, and others pending.
- 8. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
- 9. Tape and Reel Standard Per ANSI / EIA 481.

RF Monolithics, Inc. Phone: (972) 233-2903 Fax: (972) 387-8148 RFM Europe Phone: 44 1963 251383 Fax: 44 1963 251510 ©1999 by RF Monolithics, Inc. The stylized RFM logo are registered trademarks of RF Monolithics, Inc.

E-mail: info@rfm.com http://www.rfm.com RF1172C-042704


SAW Filter


Absolute Maximum Ratings

	Value	Units	
Input Power Level		10	dBm
DC Voltage		12	VDC
Storage Temperature		-40 to +85	°C
Soldering Temperature	(10 seconds / 5 cycles max.)	260	°C

Typical Filter Response


Typical filter responses are shown below. The actual response is dependent on external impedance matching and circuit layout.






Electrical Connections

Connection		
Input Ground		
Input		
to be Grounded		
Case Ground		
Output		
Output Ground		
to be Grounded		
Case Ground		

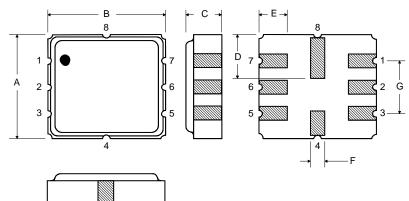

Matching Circuit to 50Ω

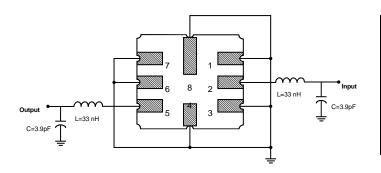

Case Dimensions

Dimension	mm			Inches			
	Min	Nom	Max	Min	Nom	Max	
Α	4.8	5.0	5.2	0.189	0.197	0.205	
В	4.8	5.0	5.2	0.189	0.197	0.205	
С			1.7			0.067	
D		2.08			0.082		
E		1.17			0.046		
F		0.64			0.025		
G	2.39	2.54	2.69	0.094	0.100	0.106	