



2SD2686

Preliminary

NPN EPITAXIAL SILICON TRANSISTOR

SILICON NPN EPITAXIAL TYPE (DARLINGTON POWER)

DESCRIPTION



The UTC **2SD2686** is a silicon NPN epitaxial type transistors, including a zener diode between collector and base. it uses UTC's advanced technology to provide customers high DC current gain.

The UTC **2SD2686** is suitable for solenoid drive and motor drive applications.

FEATURES

- * High DC current gain
- * Zener diode included between collector and base

EQUIVALENT CIRCUIT

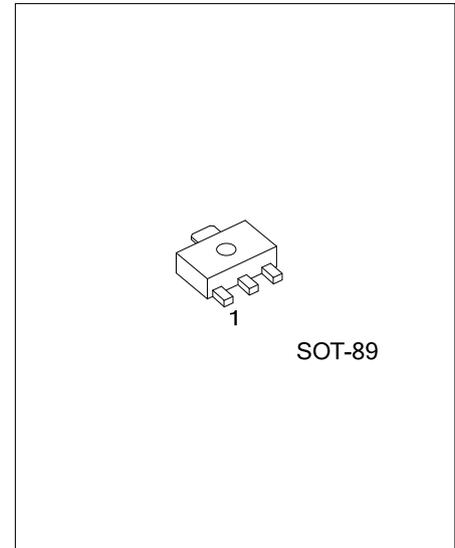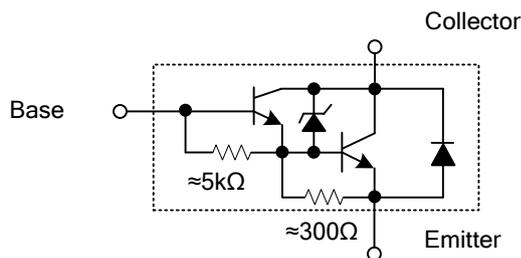


ORDERING INFORMATION

Order Number	Package	Pin Assignment			Packing
		1	2	3	
2SD2686G-x-AB3-R	SOT-89	B	C	E	Tape Reel

Note: Pin Assignment: B: Base C: Collector E: Emitter

<p>2SD2686G-AB3-R</p> <p>(1) Packing Type</p> <p>(2) Package Type</p> <p>(3) Green Package</p>	<p>(1) R: Tape Reel</p> <p>(2) AB3: SOT-89</p> <p>(3) G: Halogen Free and Lead Free</p>
------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------

MARKING



■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Collector-Base Voltage	V_{CBO}	50	V
Collector-Emitter Voltage	V_{CEO}	60 ± 10	V
Emitter-Base Voltage	V_{EBO}	8	V
Collector Current	DC	I_C	1
	Pulse	I_{CP}	3
Base Current	I_B	0.5	A
Power Dissipation (Note 2)	P_D	500	mW
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55~+150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.


Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Mounted on an FR4 board (glass-epoxy; 1.6mm thick; Cu area, 645mm²)

■ ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Emitter Breakdown Voltage	BV_{CEO}	$I_C=10\text{mA}$, $I_B=0$	50	60	70	V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=45\text{V}$, $I_E=0$			10	μA
	I_{CEO}	$V_{CE}=45\text{V}$, $I_E=0$			10	μA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=8\text{V}$, $I_C=0$	0.8		4.0	mA
DC Current Gain	h_{FE}	$V_{CE}=2\text{V}$, $I_C=1.0\text{A}$	2000			
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=0.5\text{A}$, $I_B=1\text{mA}$			1.2	V
		$I_C=1.0\text{A}$, $I_B=1\text{mA}$			1.5	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=1.0\text{A}$, $I_B=1\text{mA}$			2.0	V
Turn-On Time	t_{ON}	See specified test circuit.		0.4		μs
Storage Time	t_{STG}			4.0		μs
Fall Time	t_F			0.6		μs

■ SWITCHING TIME TEST CIRCUIT & TIMING CHART

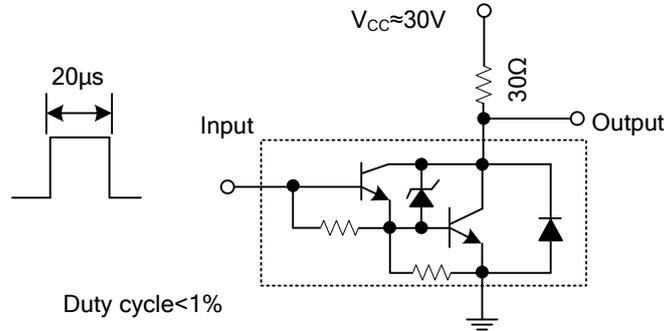

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.