



# 曜凌光電股份有限公司

住址: 42878 台中縣大雅鄉科雅路 25 號 5F WEB: <http://www.Raystar-Optronics.com>  
5F, No.25, keya Rd. Daya Township, Taichung E-mail: sales@raystar-optronics.com  
County, Taiwan Tel:886-4-2565-0761 Fax : 886-4-2565-0760

## RG320240A1-BIW-V

### SPECIFICATION

**CUSTOMER :** \_\_\_\_\_

<b>APPROVED BY:</b>  ( FOR CUSTOMER USE ONLY )	<b>PCB VERSION:</b>  <b>DATA:</b>
--	---

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY
<b>ISSUED DATE:</b>			

## Contents

1.	<i>Specification Revision History</i>	<i>Page 3</i>
2.	<i>General Specification</i>	<i>Page 4</i>
3.	<i>Module Classification Information</i>	<i>Page 5</i>
4.	<i>Interface Pin Function</i>	<i>Page 6</i>
5.	<i>Outline dimension &amp; Block Diagram</i>	<i>Page 7</i>
6.	<i>Timing Characteristics</i>	<i>Page 8</i>
7.	<i>Optical Characteristics</i>	<i>Page 11</i>
8.	<i>Absolute Maximum Ratings</i>	<i>Page 12</i>
9.	<i>Electrical Characteristics</i>	<i>Page 12</i>
10.	<i>Backlight Information</i>	<i>Page 13</i>
11.	<i>Reliability</i>	<i>Page 14</i>
12.	<i>Inspection specification</i>	<i>Page 15</i>
13.	<i>Precautions in use of LCD Modules</i>	<i>Page 19</i>
14.	<i>Material List of Components for RoHs</i>	<i>Page 20</i>

## 1. Specification Revision History

RECORDS OF REVISION			
VERSION	DATE	REVISED PAGE NO.	Note
1	2008.03.21		First issue

## 2. General Specification

The Features of the Module is description as follow:

- Module dimension: 160.0 x 109.0 x 11.0 (max.) mm<sup>3</sup>
- View area: 122.0 x 92.0 mm<sup>2</sup>
- Active area: 115.18 x 86.38 mm<sup>2</sup>
- Number of Dots: 320 x2 40
- Dot size: 0.34 x 0.34 mm<sup>2</sup>
- Dot pitch: 0.36 x 0.36 mm<sup>2</sup>
- LCD type: STN Negative, Transmissive ,Blue
- View direction: 6 o'clock
- Backlight Type: LED White

### 3. Module Classification Information


R G    320240    A1—B    I    W—    V  
 ① ②        ③        ④    ⑤    ⑥    ⑦        ⑧

Item	Description		
1	Brand : Raystar Optronics Inc.		
2	Display Type	C : Character Type,	
		<b>G : Graphic Type</b>	
3	Display Font : 320 x 240 Dots		
4	Serials Code.		
5	LCD Mode	P : TN Positive, Gray	
		N : TN Negative,	
		G : STN Positive, Gray	
		Y : STN Positive, Yellow Green	
		<b>B : STN Negative, Blue</b>	
		F : FSTN Positive	
		T : FSTN Negative	
6	LCD Polarizer Type/ Temperature range/ View direction	A : Reflective, N.T, 6:00	K : Transflective, W.T,12:00
		D : Reflective, N.T, 12:00	1 : Transflective, U.T,6:00
		G : Reflective, W. T, 6:00	4 : Transflective, U.T.12:00
		J : Reflective, W. T, 12:00	C : Transmissive, N.T,6:00
		0 : Reflective, U. T, 6:00	F : Transmissive, N.T,12:00
		3 : Reflective, U. T, 12:00	<b>I : Transmissive, W. T, 6:00</b>
		B : Transflective, N.T,6:00	L : Transmissive, W.T,12:00
		E : Transflective, N.T.12:00	2 : Transmissive, U. T, 6:00
		H : Transflective, W.T,6:00	5 : Transmissive, U.T,12:00
7	Backlight Type	N : Without backlight	Y : LED, Yellow Green
		P : EL, Blue green	A : LED, Amber
		T : EL, Green	<b>W : LED, White</b>
		D : EL, White	O : LED, Orange
		F : CCFL, White	G : LED, Green
8	Special Code	V: Built-in Negative Voltage	

## 4. Interface Pin Function



Pin No.	Symbol	Level	Description
1	V <sub>SS</sub>	0V	Ground
2	V <sub>DD</sub>	5.0V	Power supply for Logic
3	V <sub>O</sub>	(Variable)	Driving voltage for LCD
4	A0	H/L	RD=L WR=H ,A0=L :Data Read    AO=H :Status read RD=H WR=L ,A0=L :Data Write    AO=H :Command write
5	WR	H/L	8080 family: Write signal, 6800 family: R/W signal
6	RD	H/L	8080 family: Read signal, 6800 family: Enable clock
7~14	DB0~DB7	H/L	Data bus
15	CS	H/L	Chip select ,Active L
16	RES	H/L	Controller reset signal, Active L
17	V <sub>EE</sub>	-25V	Negative voltage output (Optional)
18	NC		No connection
19	NC		No connection
20	NC		No connection

5. Outline Dimension &Block Diagram

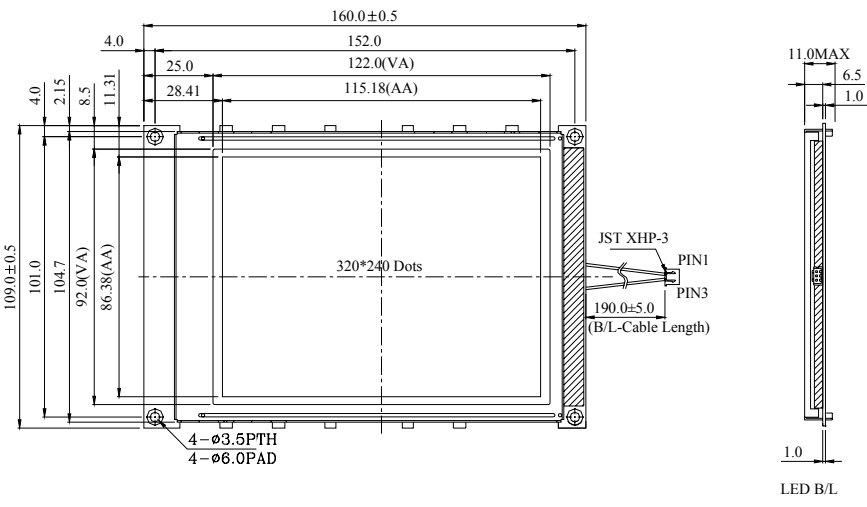

PIN NO.	SYMBOL
1	Vss
2	Vdd
3	Vo
4	A0
5	WR
6	RD
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS
16	RES
17	Vee
18	NC
19	NC
20	NC

The non-specified tolerance of dimension is ±0.3mm.

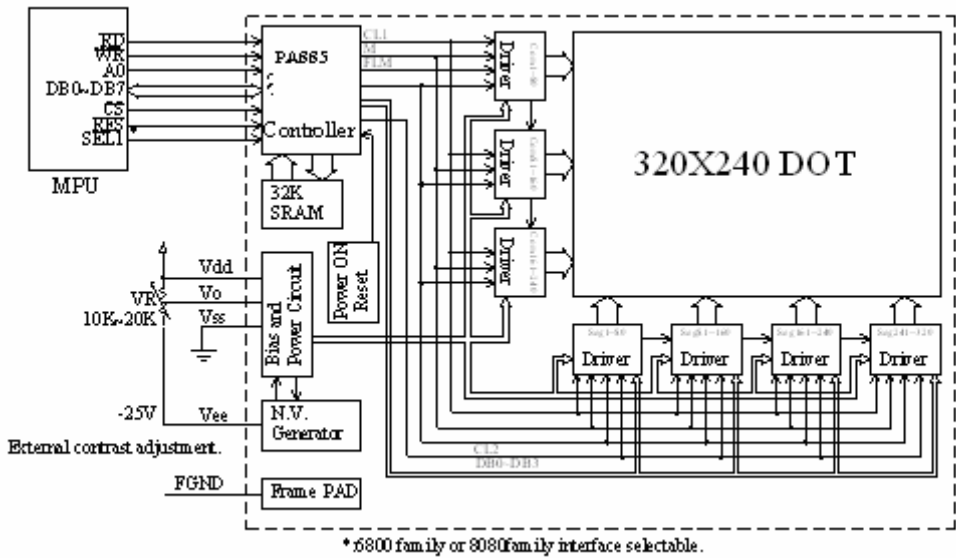

## 6. Timing Characteristics

The RA8835 series is controller IC that can display text and graphics on LCD panel. The RA8835 series can display layered text and graphics, scroll the display in any direction and partition the display into multiple screens. The RA8835 series stores text, character codes and bitmapped graphics data in external frame buffer memory. Display controller functions include transferring data from controlling microprocessor to the buffer memory, reading memory data, converting data to display pixels and generating timing signals for the buffer memory, LCD panel. The RA8835 series has internal character generator with 160, 5\*7 pixel characters in internal mask ROM. The character generators support up to 64,8\*16 pixel characters in external characters in external character generator RAM and up to 256,8\*16 pixel characters in external character generator ROM .



## The Command Set

Table 1. Command set

Class	Command	Code												Hex	Command Description	Command Read Parameters	
		RD	WR	A0	D7	D6	D5	D4	D3	D2	D1	D0	No. of Bytes			Section	
System control	SYSTEM SET	1	0	1	0	1	0	0	0	0	0	0	40	Initialize device and display	8	8.2.1	
	SLEEP IN	1	0	1	0	1	0	1	0	0	1	1	53	Enter standby mode	0	8.2.2	
Display control	DISP ON/OFF	1	0	1	0	1	0	1	1	0	0	D	58, 59	Enable and disable display and display flashing	1	8.3.1	
	SCROLL	1	0	1	0	1	0	0	0	1	0	0	44	Set display start address and display regions	10	8.3.2	
	CSRFORM	1	0	1	0	1	0	1	1	1	0	1	5D	Set cursor type	2	8.3.3	
	CGRAM ADR	1	0	1	0	1	0	1	1	1	0	0	5C	Set start address of character generator RAM	2	8.3.6	
	CSRDIR	1	0	1	0	1	0	0	1	1	CD 1	CD 0	4C to 4F	Set direction of cursor movement	0	8.3.4	
	HDOT SCR	1	0	1	0	1	0	1	1	0	1	0	5A	Set horizontal scroll position	1	8.3.7	
	OVLAY	1	0	1	0	1	0	1	1	0	1	1	5B	Set display overlay format	1	8.3.5	
Drawing control	CSRW	1	0	1	0	1	0	0	0	1	1	0	46	Set cursor address	2	8.4.1	
	CSRR	1	0	1	0	1	0	0	0	1	1	1	47	Read cursor address	2	8.4.2	
Memory control	MWRITE	1	0	1	0	1	0	0	0	0	1	0	42	Write to display memory	—	8.5.1	
	MREAD	1	0	1	0	1	0	0	0	0	1	1	43	Read from display memory	—	8.5.2	

### Notes:

- In general, the internal registers of the RA8835 series are modified as each command parameter is input. However, the microprocessor does not have to set all the parameters of a command and may send a new command before all parameters have been input. The internal registers for the parameters that have been input will have been changed but the remaining parameter registers are unchanged.
  - 2-byte parameters (where two bytes are treated as 1 data item) are handled as follows:
    - CSRW, CSRR: Each byte is processed individually. The microprocessor may read or write just the low byte of the cursor address.
    - SYSTEM SET, SCROLL, CGRAM ADR: Both parameter bytes are processed together. If the command is changed after half of the parameter has been input, the single byte is ignored.
- APL and APH are 2-byte parameters, but are treated as two 1-byte parameters.

## SYSTEM SET

Initializes the device, sets the window sizes, and selects the LCD interface format. Since this command sets the basic operating parameters of the RA8835 i series, an

incorrect SYSTEM SET command may cause other commands to operate incorrectly.

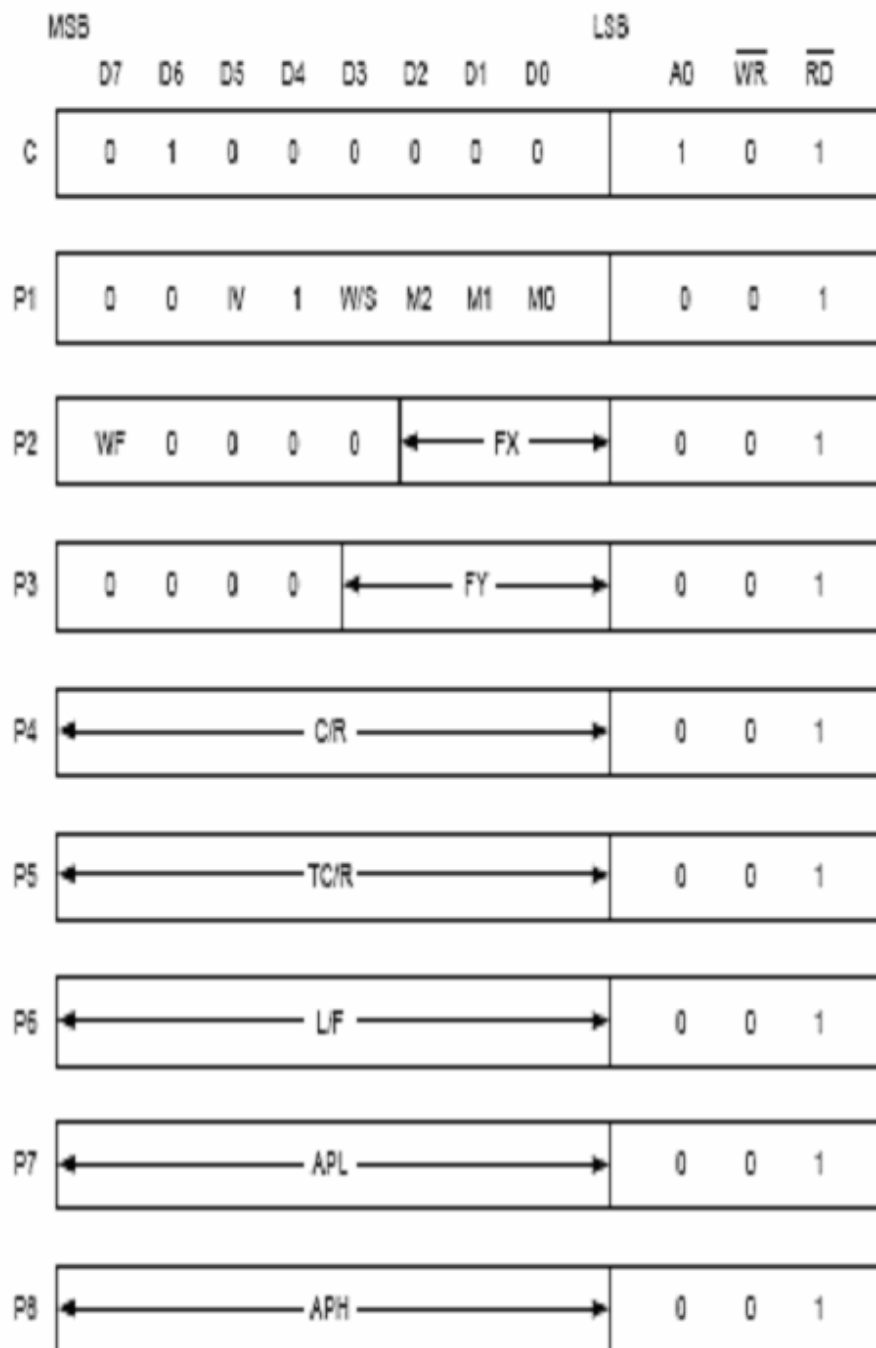



Figure 1. SYSTEM SET instruction

## 7. Optical Characteristics


ITEM	SYMBAL	CONDITION	MIN	TYP	MAX	UNIT
View Angle	(V) $\theta$	$CR \geq 2$	20	—	40	deg.
	(H) $\varphi$	$CR \geq 2$	-30	—	30	deg.
Contrast Ratio	CR	—	—	3	—	—
Response Time	T rise	—	—	200	300	ms
	T fall	—	—	150	200	ms

### 7.1 Definitions


#### ■ View Angles

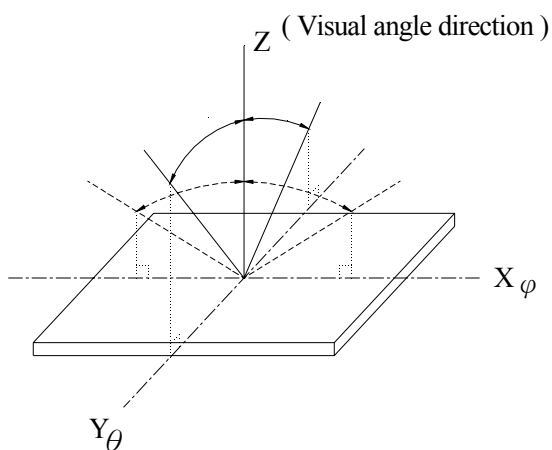

#### ■ Contrast Ratio

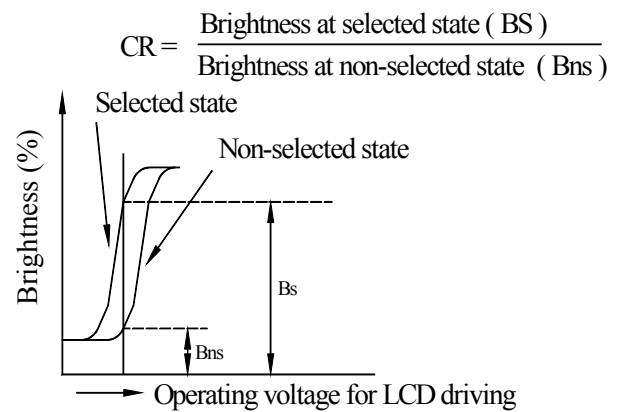

#### ■ Response Time

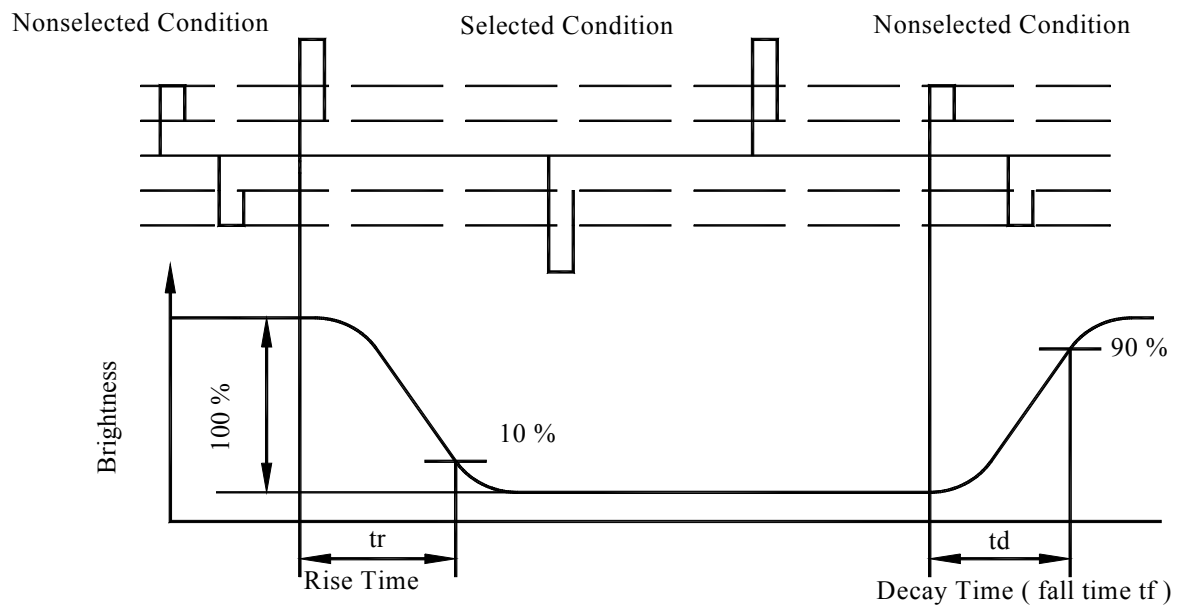

## 8. Absolute Maximum Ratings

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
Operating Temperature	T <sub>OP</sub>	-20	—	+70	°C
Storage Temperature	T <sub>ST</sub>	-30	—	+80	°C
Input Voltage	V <sub>I</sub>	0	—	V <sub>DD</sub>	V
Supply Voltage For Logic	V <sub>DD</sub>	0	—	6.5	V
Supply Voltage For LCD	V <sub>DD</sub> -V <sub>EE</sub>	0	—	32	V

## 9. Electrical Characteristics

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Logic Voltage	V <sub>DD</sub> -V <sub>SS</sub>	—	4.5	5.0	5.5	V
Supply Voltage For LCD	V <sub>DD</sub> -V <sub>O</sub>	Ta=-20°C	—	—	26.5	V
		Ta=25°C	—	24.0	—	V
		Ta=+70°C	22.1	—	—	V
Input High Volt.	V <sub>IH</sub>	—	0.5V <sub>DD</sub>	—	V <sub>DD</sub>	V
Input Low Volt.	V <sub>IL</sub>	—	V <sub>SS</sub>	—	0.2V <sub>DD</sub>	V
Output High Volt.	V <sub>OH</sub>	—	2.4	—	—	V
Output Low Volt.	V <sub>OL</sub>	—	—	—	0.4	V
Supply Current	I <sub>DD</sub>	—	95.0	100.0	110.0	mA

## 10. Backlight Information

### Specification


(Ta=25°C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	TEST CONDITION
Supply Current	I <sub>LED</sub>	115.2	128	200	mA	V=3.5V
Supply Voltage	V	3.4	3.5	3.6	V	—
Reverse Voltage	V <sub>R</sub>	—	—	5	V	—
Luminous Intensity	I <sub>V</sub>	260	280	—	CD/M <sup>2</sup>	I <sub>LED</sub> =128mA
Wave Length	p			—	nm	I <sub>LED</sub> =128mA
Life Time	—	—	50K	—	Hr.	I <sub>LED</sub> 128mA
Color	White					

**Note:** The LED of B/L is drive by current only, drive voltage is for reference only.  
drive voltage can make driving current under safety area (current between minimum and maximum).


### LED B\L Drive Method

#### 1. Drive from A , K

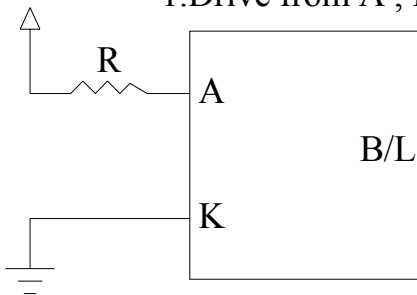

# 11. Reliability

## Content of Reliability Test (wide temperature, -20°C~70°C)


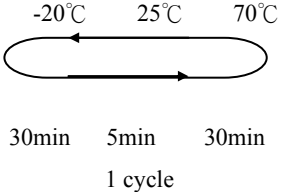
Environmental Test			
Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	80°C 200hrs	2
Low Temperature storage	Endurance test applying the high storage temperature for a long time.	-30°C 200hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70°C 200hrs	—
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-20°C 200hrs	1
High Temperature/ Humidity Operation	The module should be allowed to stand at 60°C,90%RH max For 96hrs under no-load condition excluding the polarizer, Then taking it out and drying it at normal temperature.	60°C,90%RH 96hrs	1,2
Thermal shock resistance	<p>The sample should be allowed stand the following 10 cycles of operation</p>  <p style="text-align: center;">-20°C    25°C    70°C</p> <p style="text-align: center;">30min    5min    30min</p> <p style="text-align: center;">1 cycle</p>	-20°C/70°C 10 cycles	—
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed amplitude : 15mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=800V,RS=1.5kΩ CS=100pF 1 time	—



**Note1: No dew condensation to be observed.**

**Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.**




**Note3: Vibration test will be conducted to the product itself without putting it in a container.**


## 12. Inspection specification

NO	Item	Criterion	AQL																			
01	Electrical Testing	1.1 Missing vertical, horizontal segment, segment contrast defect. 1.2 Missing character , dot or icon. 1.3 Display malfunction. 1.4 No function or no display. 1.5 Current consumption exceeds product specifications. 1.6 LCD viewing angle defect. 1.7 Mixed product types. 1.8 Contrast defect.	0.65																			
02	Black or white spots on LCD (display only)	2.1 White and black spots on display 0.25mm, no more than three white or black spots present. 2.2 Densely spaced: No more than two spots or lines within 3mm	2.5																			
03	LCD black spots, white spots, contamination (non-display)	3.1 Round type : As following drawing $\Phi=(x+y)/2$  <table> <tr> <th colspan="2">SIZE</th> <th>Acceptable Q TY</th> </tr> <tr> <td><math>\Phi</math></td> <td>0.10</td> <td>Accept no dense</td> </tr> <tr> <td>0.10</td> <td><math>\Phi</math> 0.20</td> <td>2</td> </tr> <tr> <td>0.20</td> <td><math>\Phi</math> 0.25</td> <td>1</td> </tr> <tr> <td>0.25</td> <td><math>\Phi</math></td> <td>0</td> </tr> </table>	SIZE		Acceptable Q TY	$\Phi$	0.10	Accept no dense	0.10	$\Phi$ 0.20	2	0.20	$\Phi$ 0.25	1	0.25	$\Phi$	0	2.5				
		SIZE		Acceptable Q TY																		
$\Phi$	0.10	Accept no dense																				
0.10	$\Phi$ 0.20	2																				
0.20	$\Phi$ 0.25	1																				
0.25	$\Phi$	0																				
		3.2 Line type : (As following drawing)  <table> <tr> <th>Length</th> <th colspan="2">Width</th> <th>Acceptable Q TY</th> </tr> <tr> <td>---</td> <td>W</td> <td>0.02</td> <td>Accept no dense</td> </tr> <tr> <td>L 3.0</td> <td>0.02</td> <td>W 0.03</td> <td rowspan="2">2</td> </tr> <tr> <td>L 2.5</td> <td>0.03</td> <td>W 0.05</td> </tr> <tr> <td>---</td> <td>0.05</td> <td>W</td> <td>As round type</td> </tr> </table>	Length	Width		Acceptable Q TY	---	W	0.02	Accept no dense	L 3.0	0.02	W 0.03	2	L 2.5	0.03	W 0.05	---	0.05	W	As round type	2.5
Length	Width		Acceptable Q TY																			
---	W	0.02	Accept no dense																			
L 3.0	0.02	W 0.03	2																			
L 2.5	0.03	W 0.05																				
---	0.05	W	As round type																			
04	Polarizer bubbles	If bubbles are visible, judge using black spot specifications, not easy to find, must check in specify direction. <table> <tr> <th colspan="2">Size <math>\Phi</math></th> <th>Acceptable Q TY</th> </tr> <tr> <td><math>\Phi</math></td> <td>0.20</td> <td>Accept no dense</td> </tr> <tr> <td>0.20</td> <td><math>\Phi</math> 0.50</td> <td>3</td> </tr> <tr> <td>0.50</td> <td><math>\Phi</math> 1.00</td> <td>2</td> </tr> <tr> <td>1.00</td> <td><math>\Phi</math></td> <td>0</td> </tr> <tr> <td colspan="2">Total Q TY</td> <td>3</td> </tr> </table>	Size $\Phi$		Acceptable Q TY	$\Phi$	0.20	Accept no dense	0.20	$\Phi$ 0.50	3	0.50	$\Phi$ 1.00	2	1.00	$\Phi$	0	Total Q TY		3	2.5	
Size $\Phi$		Acceptable Q TY																				
$\Phi$	0.20	Accept no dense																				
0.20	$\Phi$ 0.50	3																				
0.50	$\Phi$ 1.00	2																				
1.00	$\Phi$	0																				
Total Q TY		3																				

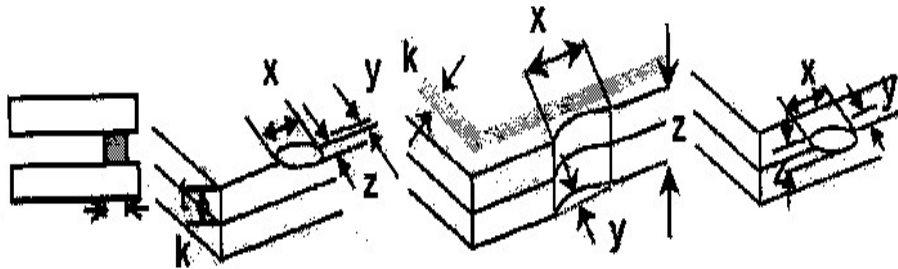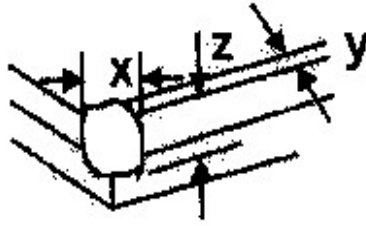NO	Item	Criterion	AQL																		
05	Scratches	Follow NO.3 LCD black spots, white spots, contamination																			
06	Chipped glass	<p>Symbols Define:</p> <p>x: Chip length                      y: Chip width                      z: Chip thickness</p> <p>k: Seal width                      t: Glass thickness                      a: LCD side length</p> <p>L: Electrode pad length:</p> <p>6.1 General glass chip :</p> <p>6.1.1 Chip on panel surface and crack between panels:</p>  <table> <tr> <th>z: Chip thickness</th> <th>y: Chip width</th> <th>x: Chip length</th> </tr> <tr> <td><math>Z \leq 1/2t</math></td> <td>Not over viewing area</td> <td><math>x \leq 1/8a</math></td> </tr> <tr> <td><math>1/2t \leq z \leq 2t</math></td> <td>Not exceed <math>1/3k</math></td> <td><math>x \leq 1/8a</math></td> </tr> </table> <p>If there are 2 or more chips, x is total length of each chip.</p> <p>6.1.2 Corner crack:</p>  <table> <tr> <th>z: Chip thickness</th> <th>y: Chip width</th> <th>x: Chip length</th> </tr> <tr> <td><math>Z \leq 1/2t</math></td> <td>Not over viewing area</td> <td><math>x \leq 1/8a</math></td> </tr> <tr> <td><math>1/2t \leq z \leq 2t</math></td> <td>Not exceed <math>1/3k</math></td> <td><math>x \leq 1/8a</math></td> </tr> </table> <p>If there are 2 or more chips, x is the total length of each chip.</p>	z: Chip thickness	y: Chip width	x: Chip length	$Z \leq 1/2t$	Not over viewing area	$x \leq 1/8a$	$1/2t \leq z \leq 2t$	Not exceed $1/3k$	$x \leq 1/8a$	z: Chip thickness	y: Chip width	x: Chip length	$Z \leq 1/2t$	Not over viewing area	$x \leq 1/8a$	$1/2t \leq z \leq 2t$	Not exceed $1/3k$	$x \leq 1/8a$	2.5
		z: Chip thickness	y: Chip width	x: Chip length																	
$Z \leq 1/2t$	Not over viewing area	$x \leq 1/8a$																			
$1/2t \leq z \leq 2t$	Not exceed $1/3k$	$x \leq 1/8a$																			
z: Chip thickness	y: Chip width	x: Chip length																			
$Z \leq 1/2t$	Not over viewing area	$x \leq 1/8a$																			
$1/2t \leq z \leq 2t$	Not exceed $1/3k$	$x \leq 1/8a$																			

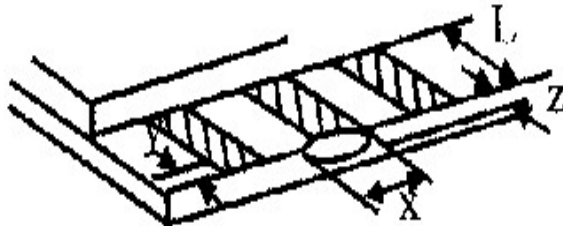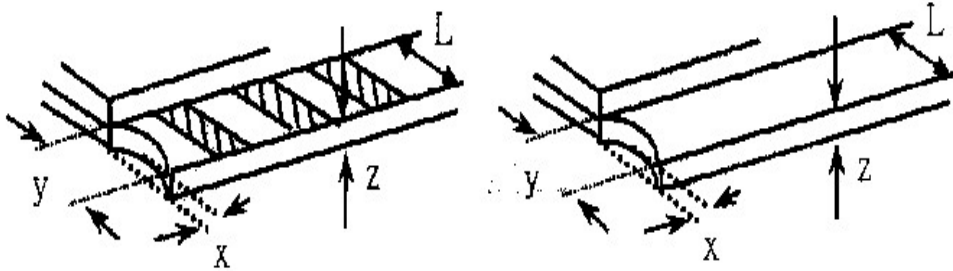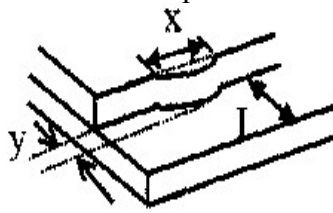

NO	Item	Criterion	AQL																
06	Glass crack	<p>Symbols :</p> <p>x: Chip length            y: Chip width            z: Chip thickness</p> <p>k: Seal width            t: Glass thickness    a: LCD side length</p> <p>L: Electrode pad length</p> <p>6.2 Protrusion over terminal :</p> <p>6.2.1 Chip on electrode pad :</p> <div>  <table> <tr> <th>y: Chip width</th> <th>x: Chip length</th> <th>z: Chip thickness</th> </tr> <tr> <td>y 0.5mm</td> <td>x 1/8a</td> <td>0 z t</td> </tr> </table> </div> <p>6.2.2 Non-conductive portion:</p> <div>  <table> <tr> <th>y: Chip width</th> <th>x: Chip length</th> <th>z: Chip thickness</th> </tr> <tr> <td>y L</td> <td>x 1/8a</td> <td>0 z t</td> </tr> </table> <p>If the chipped area touches the ITO terminal, over 2/3 of the ITO must remain and be inspected according to electrode terminal specifications.</p> <p>If the product will be heat sealed by the customer, the alignment mark not be damaged.</p> <p>6.2.3 Substrate protuberance and internal crack.</p> <div>  <table> <tr> <th>y: width</th> <th>x: length</th> </tr> <tr> <td>y 1/3L</td> <td>x a</td> </tr> </table> </div> </div>	y: Chip width	x: Chip length	z: Chip thickness	y 0.5mm	x 1/8a	0 z t	y: Chip width	x: Chip length	z: Chip thickness	y L	x 1/8a	0 z t	y: width	x: length	y 1/3L	x a	2.5
		y: Chip width	x: Chip length	z: Chip thickness															
		y 0.5mm	x 1/8a	0 z t															
		y: Chip width	x: Chip length	z: Chip thickness															
		y L	x 1/8a	0 z t															
		y: width	x: length																
		y 1/3L	x a																

NO	Item	Criterion	AQL
07	Cracked glass	The LCD with extensive crack is not acceptable.	2.5
08	Backlight elements	8.1 Illumination source flickers when lit. 8.2 Spots or scratched that appear when lit must be judged. Using LCD spot, lines and contamination standards. 8.3 Backlight doesn't light or color wrong.	0.65 2.5 0.65
09	Bezel	9.1 Bezel may not have rust, be deformed or have fingerprints, stains or other contamination. 9.2 Bezel must comply with job specifications.	2.5 0.65
10	PCB COB	10.1 COB seal may not have pinholes larger than 0.2mm or contamination. 10.2 COB seal surface may not have pinholes through to the IC. 10.3 The height of the COB should not exceed the height indicated in the assembly diagram. 10.4 There may not be more than 2mm of sealant outside the seal area on the PCB. And there should be no more than three places. 10.5 No oxidation or contamination PCB terminals. 10.6 Parts on PCB must be the same as on the production characteristic chart. There should be no wrong parts, missing parts or excess parts. 10.7 The jumper on the PCB should conform to the product characteristic chart. 10.8 If solder gets on bezel tab pads, LED pad, zebra pad or screw hold pad, make sure it is smoothed down. 10.9 The Scraping testing standard for Copper Coating of PCB  $X * Y \leq 2\text{mm}^2$	2.5 2.5 0.65 2.5 0.65 0.65 2.5 2.5
11	Soldering	11.1 No un-melted solder paste may be present on the PCB. 11.2 No cold solder joints, missing solder connections, oxidation or icicle. 11.3 No residue or solder balls on PCB. 11.4 No short circuits in components on PCB.	2.5 2.5 2.5 0.65

NO	Item	Criterion	AQL
12	General appearance	12.1 No oxidation, contamination, curves or, bends on interface Pin (OLB) of TCP.	2.5
		12.2 No cracks on interface pin (OLB) of TCP.	0.65
		12.3 No contamination, solder residue or solder balls on product.	2.5
		12.4 The IC on the TCP may not be damaged, circuits.	2.5
		12.5 The uppermost edge of the protective strip on the interface pin must be present or look as if it cause the interface pin to sever.	2.5
		12.6 The residual rosin or tin oil of soldering (component or chip component) is not burned into brown or black color.	2.5
		12.7 Sealant on top of the ITO circuit has not hardened.	2.5
		12.8 Pin type must match type in specification sheet.	0.65
		12.9 LCD pin loose or missing pins.	0.65
		12.10 Product packaging must the same as specified on packaging specification sheet.	0.65
		12.11 Product dimension and structure must conform to product specification sheet.	0.65

## 13. Precautions in use of LCD Modules

- (1) Avoid applying excessive shocks to the module or making any alterations or modifications to it.
- (2) Don't make extra holes on the printed circuit board, modify its shape or change the components of LCD module.
- (3) Don't disassemble the LCM.
- (4) Don't operate it above the absolute maximum rating.
- (5) Don't drop, bend or twist LCM.
- (6) Soldering: only to the I/O terminals.
- (7) Storage: please storage in anti-static electricity container and clean environment.

## 14. Material List of Components for RoHs

1. RAYSTAR Optronics Co., Ltd. hereby declares that all of or part of products, including, but not limited to, the LCM, accessories or packages, manufactured and/or delivered to your company (including your subsidiaries and affiliated company) directly or indirectly by our company (including our subsidiaries or affiliated companies) do not intentionally contain any of the substances listed in all applicable EU directives and regulations, including the following substances.

Exhibit A : The Harmful Material List

Material	(Cd)	(Pb)	(Hg)	(Cr6+)	PBBs	PBDEs
Limited Value	100 ppm	1000 ppm	1000 ppm	1000 ppm	1000 ppm	1000 ppm
Above limited value is set up according to RoHS.						

2. Process for RoHS requirement :

- (1) Use the Sn/Ag/Cu soldering surface the surface of Pb-free solder is rougher than we used before.
- (2) Heat-resistance temp. :  
Reflow : 250°C, 30 seconds Max.  
Connector soldering wave or hand soldering : 320°C, 10 seconds max.
- (3) Temp. curve of reflow, max. Temp. : 235±5°C  
Recommended customer's soldering temp. of connector : 280°C, 3 seconds.

## LCM Sample Estimate Feedback Sheet

**Module Number :** \_\_\_\_\_

### **1 Panel Specification :**

1. Panel Type :	Pass	NG , _____
2. View Direction :	Pass	NG , _____
3. Numbers of Dots :	Pass	NG , _____
4. View Area :	Pass	NG , _____
5. Active Area :	Pass	NG , _____
6. Operating Temperature :	Pass	NG , _____
7. Storage Temperature :	Pass	NG , _____
8. Others :	_____	

### **2 Mechanical Specification :**

1. PCB Size :	Pass	NG , _____
2. Frame Size :	Pass	NG , _____
3. Material of Frame :	Pass	NG , _____
4. Connector Position :	Pass	NG , _____
5. Fix Hole Position :	Pass	NG , _____
6. Backlight Position :	Pass	NG , _____
7. Thickness of PCB :	Pass	NG , _____
8. Height of Frame to PCB :	Pass	NG , _____
9. Height of Module :	Pass	NG , _____
10. Others :	Pass	NG , _____

### **3 Relative Hole Size :**

1. Pitch of Connector :	Pass	NG , _____
2. Hole size of Connector :	Pass	NG , _____
3. Mounting Hole size :	Pass	NG , _____
4. Mounting Hole Type :	Pass	NG , _____
5. Others :	Pass	NG , _____

### **4 Backlight Specification :**

1. B/L Type :	Pass	NG , _____
2. B/L Color :	Pass	NG , _____
3. B/L Driving Voltage (Reference for LED Type) :	Pass	NG , _____
4. B/L Driving Current :	Pass	NG , _____
5. Brightness of B/L :	Pass	NG , _____
6. B/L Solder Method :	Pass	NG , _____
7. Others :	Pass	NG , _____

**Go to page 2**

Module Number : \_\_\_\_\_

### 5 Electronic Characteristics of Module :

1.Input Voltage :	Pass	NG ,_____
2.Supply Current :	Pass	NG ,_____
3.Driving Voltage for LCD :	Pass	NG ,_____
4.Contrast for LCD :	Pass	NG ,_____
5.B/L Driving Method :	Pass	NG ,_____
6.Negative Voltage Output :	Pass	NG ,_____
7.Interface Function :	Pass	NG ,_____
8.LCD Uniformity :	Pass	NG ,_____
9.ESD test :	Pass	NG ,_____
10.Others :	Pass	NG ,_____

### 6 Summary :

Sales signature : \_\_\_\_\_

Customer Signature : \_\_\_\_\_

Date :     /     /