

# REALTEK

**RTD2556-CG**

## **MULTI-FUNCTION DISPLAY CONTROLLER**

### **DATASHEET**

**(CONFIDENTIAL: Development Partners Only)**

**Rev. 0.01**

**26 February 2016**

**Track ID: JATR-8275-15**



**Realtek Semiconductor Corp.**

No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

Tel.: +886-3-578-0211. Fax: +886-3-577-6047

[www.realtek.com](http://www.realtek.com)

**COPYRIGHT**

© 2015 Realtek Semiconductor Corp. All rights reserved. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any means without the written permission of Realtek Semiconductor Corp.

**DISCLAIMER**

Realtek provides this document 'as is', without warranty of any kind. Realtek may make improvements and/or changes in this document or in the product described in this document at any time. This document could include technical inaccuracies or typographical errors.

**TRADEMARKS**

Realtek is a trademark of Realtek Semiconductor Corporation. Other names mentioned in this document are trademarks/registered trademarks of their respective owners.

**USING THIS DOCUMENT**

This document is intended for the software engineer's reference and provides detailed programming information.

Though every effort has been made to ensure that this document is current and accurate, more information may have become available subsequent to the production of this guide.

**REVISION HISTORY**

Revision	Release Date	Summary
0.01	2016/02/26	First release.

---

## Table of Contents

---

<b>1.</b>	<b>GENERAL DESCRIPTION .....</b>	<b>1</b>
<b>2.</b>	<b>FEATURES .....</b>	<b>2</b>
<b>3.</b>	<b>SYSTEM APPLICATIONS .....</b>	<b>5</b>
<b>4.</b>	<b>BLOCK DIAGRAM.....</b>	<b>6</b>
<b>5.</b>	<b>PIN ASSIGNMENTS.....</b>	<b>7</b>
<b>6.</b>	<b>PIN ASSIGNMENTS TABLE.....</b>	<b>8</b>
<b>7.</b>	<b>ELECTRICAL SPECIFICATIONS.....</b>	<b>16</b>
7.1.	Recommended Operating Conditions .....	16
7.2.	Absolute Maximum Ratings .....	16
7.3.	Reset Period .....	16
<b>8.</b>	<b>MECHANICAL SPECIFICATIONS.....</b>	<b>17</b>
<b>9.</b>	<b>ORDERING INFORMATION .....</b>	<b>19</b>

---

## List of Tables

---

TABLE 1. SIGNALS PIN ASSIGNMENT OF LQFP156.....	8
TABLE 2. RECOMMENDED OPERATING CONDITIONS OF LQFP156 .....	16
TABLE 3. ABSOLUTE MAXIMUM RATINGS OF LQFP156.....	16
TABLE 4. RESET PERIOD OF LQFP156.....	16
TABLE 5. MECHANICAL SPECIFICATION OF LQFP156 LEADS .....	18
TABLE 6. ORDERING INFORMATION .....	19

---

## List of Figures

---

FIGURE 1. BLOCK DIAGRAM .....	6
FIGURE 2. PIN DIAGRAM OF LQFP156.....	7
FIGURE 3. MECHANICAL SPECIFICATION OF LQFP156 LEADS .....	17

---

## 1. General Description

The Realtek RTD2556-CG monitor controller combines an analog RGB input interface, HDMI 1.4 compliant digital input interfaces with HDCP1.4, and DVI digital input interfaces with HDCP1.4. The embedded MCU is based on an industrial standard 8051 core with external serial flash.

The RTD2556-CG is suitable for multiple market segments and display applications, such as monitor, All in One PC, and embedded applications.

## 2. Features

### General

- RTD2556-CG supports input format up to 1920x1080 @ 60Hz.
- Support eDP panel interfaces
- Zoom scaling up and down
- Embedded one MCU with SPI flash controller.
- It contains 4 ADCs in key pad application
- Require only one crystal to generate all timing.
- Programmable internal low-voltage-reset (LVR)
- High resolution 6 channels PWM output, and wide range selectable PWM frequency.

### Crystal

- Support 14.318MHz crystal type

### Analog RGB Input Interface

- 1 Analog input supported
- Integrated 8-bit triple-channel 210MHz ADC/PLL
- Embedded programmable Schmitt trigger of HSYNC
- Support Sync-On-Green (SOG) and various kinds of composite sync modes
- On-chip high-performance hybrid PLLs
- High resolution true 64 phase ADC PLL

- YPbPr support up to HDTV 1080p resolution

### High Speed Combo Receiver

- RTD2556-CG supports 1 ports of High Speed Combo Receivers. And it can be configured as HDMI1.4 (3GHz) or DVI as desired
- In HDMI mode, HDMI1.4 is supported
- In HDMI mode, data enable only mode is supported
- In HDMI mode, 6-bit, 8-bit, 10-bit, and 12-bit color depth transport is supported
- In HDMI mode, High-Bandwidth Digital Content Protection (HDCP 1.4/HDCP2.2) is supported
- In HDMI mode, HDMI audio is allowed to transmit to I2S/SPDIF output
- In DVI mode, Digital Content Protection (HDCP 1.4) is supported

### Embedded MCU

- Industrial standard 8051 core with external serial flash
- Low speed ADC for various application
- I2C Master or Slave hardware supported

**Auto Detection /Auto Calibration**

- Input format detection
- Compatibility with standard VESA mode and support user-defined mode
- Smart engine for Phase/Image position/Color calibration

**Audio**

- Output: IIS , SPDIF
- Embedded Audio DAC
- Embedded headphone amp

**Scaling**

- Fully programmable zoom ratios
- Independent horizontal/vertical scaling
- Advanced zoom algorithm provides high image quality
- Sharpness/Smooth filter enhancement
- Support non-linear scaling from 4:3 to 16:9 or 16:9 to 4:3

**Color Processor**

- True 10 bits color processing engine
- xvYCC supported
- sRGB compliance
- Advanced dithering logic for 18-bit panel color depth enhancement
- Dynamic overshoot-smear canceling engine
- Brightness and contrast control

- Programmable 10-bit gamma support
- Peaking/Coring function for video sharpness

**VividColor™**

- Independent color management (ICM)
- Dynamic contrast control (DCC)
- Precise color mapping (PCM)
- Image Adaptive Power Saving (IAPS)
- Support ADC Noise Reduction
- Support UltraVivid III function to enhance image quality with minimal artificial effect on productivity applications

**Output Interface**

- Support 8-bit output through either eDP
- Support 4 lane eDP HBR
- Fully programmable display timing generator
- Flexible data pair swapping for easier system design.
- Fixed Last Line output for perfect panel capability

**Embedded OSD**

- Embedded 30K SRAM dynamically stores OSD command and fonts
- Support multi-color RAM font, 1, 2 and 4-bit per pixel
- 64 color palette
- Maximum 26 window with alpha-blending /

- gradient / gradient target color / gradient reversed color/ dynamic fade-in/fade-out, bordering/ shadow
- Rotate 90,180,270 degree
- Independent row shadowing/bordering
- Programmable blinking effects for each character
- OSD-made internal pattern generator for factory mode
- Support 12x18 ~ 4x18 proportional font
- Hardware decompression for OSD font
- Support OSD scrolling
- Support 2 independent font based OSD

**Power Supply**

- 3.3V / 1.1V power supply

### 3. System Applications

- Display System on Motherboard, Monitor
- Display System for All in One PCs and embedded applications



## 4. Block Diagram

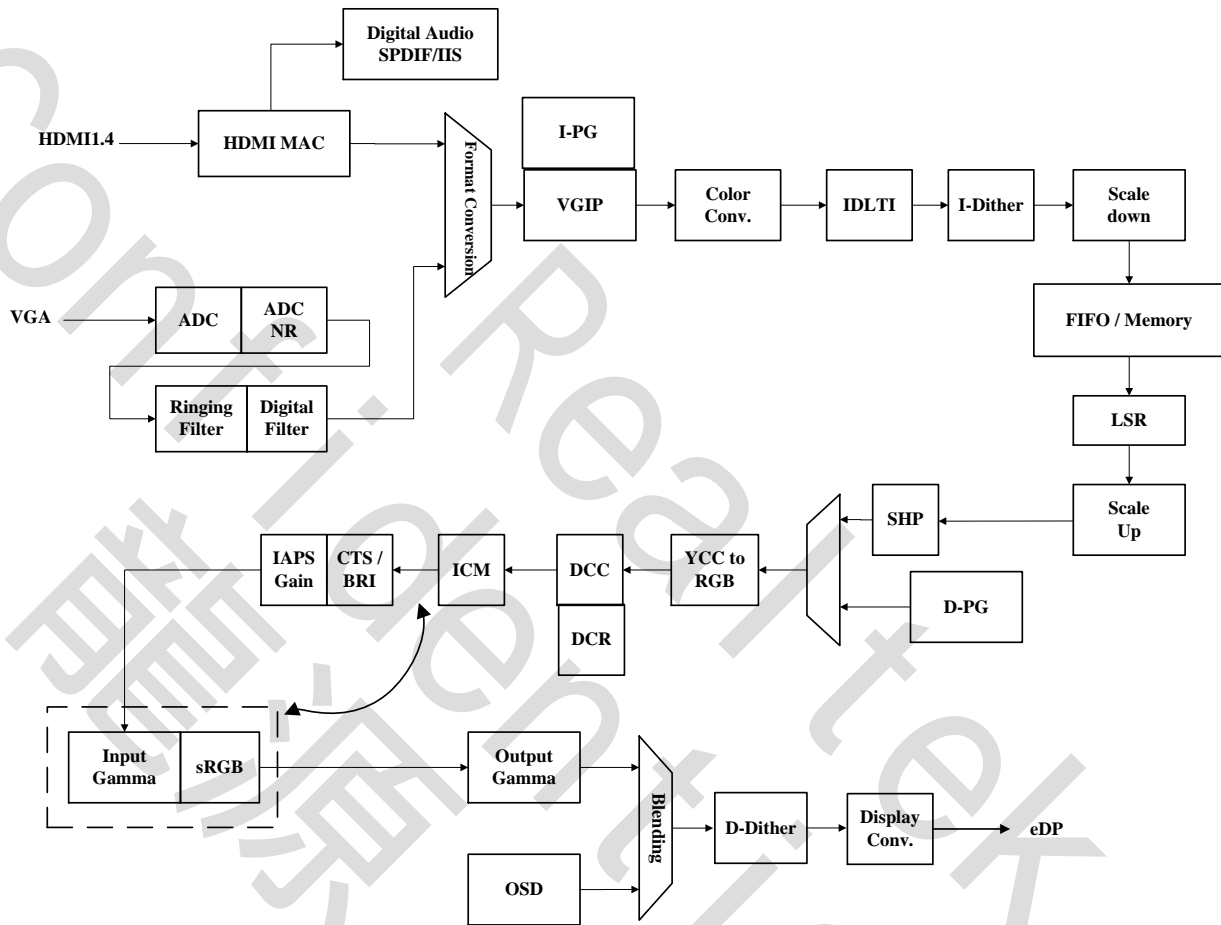


Figure 1. Block Diagram

# 5. Pin Assignments

## LQFP156

Pin No.	Pin Name / Function	Pin No.	Pin Name / Function
1	PVCC	124	B+
2	VCCK_OFF	123	B-
3	NC	122	AHS
4	NC	121	AVS
5	NC	120	ADC_VDD33
6	NC	119	TCON[8] / GPIO / Test4b
7	DPTX_LANE_P<3>	118	TCON[0] / GPIO / Test4b
8	DPTX_LANE_N<3>	117	GDI_11V
9	DP_VDD11	116	NC
10	DPTX_LANE_P<2>	115	NC
11	DPTX_LANE_N<2>	114	PGND
12	DP_VDD33	113	NC
13	DPTX_LANE_P<1>	112	NC
14	DPTX_LANE_N<1>	111	PGND
15	DP_VDD11	110	NC
16	DPTX_LANE_P<0>	109	NC
17	DPTX_LANE_N<0>	108	PGND
18	NC	107	NC
19	NC	106	NC
20	NC	105	GDI_11V
21	NC	104	RXCN_1
22	NC	103	RXCP_1
23	NC	102	RXON_1
24	NC	101	RXOP_1
25	NC	100	RXIN_1
26	GPIO	99	RX1P_1
27	GPIO	98	RX2N_1
28	GPIO	97	RX2P_1
29	GPIO	96	RX_33V
30	GPIO	95	GDI_11V
31	GPIO	94	NC
32	GPIO	93	NC
33	GPIO	92	NC
34	PVCC	91	NC
35	GPIO	90	PGND
36	GPIO	89	NC
37	GPIO	88	NC
38	GPIO	87	NC
39	GPIO	86	NC
40	GPIO	85	RX_33V
41	GPIO	84	GPIO / HDMI_HPD
42	GPIO	83	TMDS_REXT
43	GPIO	82	GPIO / Test4b
44	GPIO	81	GPIO / Test4b
45	VCCK_OFF	80	GPIO
46	PVCC	79	GPIO
47	USB_S1N_S0V / INT1 / GPIO / TZ	78	ERDSCN / PWM1 / TCON[2] / GPIO
48	USB_S1N_CBR0 / IRQ0B / GPIO / DVS	77	ERDSCN / PWM0 / TCON[1] / GPIO
49	USB_S1N_CBR1 / TX0 / GPIO	76	PWM2 / TCON[3] / GPIO
50	GPIO_X_MP3 / TCON[8] / GPIO	75	PVCC
51	PWM1_0 / eDPTX_AUX_CH_N_1 / TCON[7] / GPIO	74	TCON[9] / GPIO / Test4b / WS
52	PWM1_1 / eDPTX_AUX_CH_P_1 / TCON[6] / GPIO	73	TCON[10] / GPIO / Test4b / SCK
53	PVCC	72	TCON[12] / GPIO / Test4b / MCK
54	PWM6 / TCON[12] / GPIO / Test4b	71	TCON[13] / GPIO / Test4b / S00
55	VCCK_OFF	70	IIO / UART_TX / GPIO / Test4b
56	PVCC	69	IIO / UART_RX / GPIO / Test4b
57	SP_CLK	68	PWM3 / MISC0_2 / TCON[0] / GPIO
58	SP_S1	67	IIC_SCL_2 / PWM4 / TCON[11] / GPIO
59	SP_S0	66	PWM5 / TCON[11] / GPIO
60	SP_CBR	65	TCON[9] / GPIO / Test4b / pwm_in
61	FLASH_WP / GPIO	64	TCON[9] / GPIO / Test4b / pwm_out
62	VCCK_ON	63	PWM2_1 / TCON[11] / IR_RECEIVER / GPIO
63	VCCK_ON	62	VCCK_ON
64	VCCK_ON	61	VCCK_ON
65	VCCK_ON	60	VCCK_ON
66	VCCK_ON	59	VCCK_ON
67	VCCK_ON	58	VCCK_ON
68	VCCK_ON	57	VCCK_ON
69	VCCK_ON	56	VCCK_ON
70	VCCK_ON	55	VCCK_ON
71	VCCK_ON	54	VCCK_ON
72	VCCK_ON	53	VCCK_ON
73	VCCK_ON	52	VCCK_ON
74	VCCK_ON	51	VCCK_ON
75	VCCK_ON	50	VCCK_ON
76	VCCK_ON	49	VCCK_ON
77	VCCK_ON	48	VCCK_ON
78	VCCK_ON	47	VCCK_ON
79	VCCK_ON	46	VCCK_ON
80	VCCK_ON	45	VCCK_ON
81	VCCK_ON	44	VCCK_ON
82	VCCK_ON	43	VCCK_ON
83	VCCK_ON	42	VCCK_ON
84	VCCK_ON	41	VCCK_ON
85	VCCK_ON	40	VCCK_ON
86	VCCK_ON	39	VCCK_ON
87	VCCK_ON	38	VCCK_ON
88	VCCK_ON	37	VCCK_ON
89	VCCK_ON	36	VCCK_ON
90	VCCK_ON	35	VCCK_ON
91	VCCK_ON	34	VCCK_ON
92	VCCK_ON	33	VCCK_ON
93	VCCK_ON	32	VCCK_ON
94	VCCK_ON	31	VCCK_ON
95	VCCK_ON	30	VCCK_ON
96	VCCK_ON	29	VCCK_ON
97	VCCK_ON	28	VCCK_ON
98	VCCK_ON	27	VCCK_ON
99	VCCK_ON	26	VCCK_ON
100	VCCK_ON	25	VCCK_ON
101	VCCK_ON	24	VCCK_ON
102	VCCK_ON	23	VCCK_ON
103	VCCK_ON	22	VCCK_ON
104	VCCK_ON	21	VCCK_ON
105	VCCK_ON	20	VCCK_ON
106	VCCK_ON	19	VCCK_ON
107	VCCK_ON	18	VCCK_ON
108	VCCK_ON	17	VCCK_ON
109	VCCK_ON	16	VCCK_ON
110	VCCK_ON	15	VCCK_ON
111	VCCK_ON	14	VCCK_ON
112	VCCK_ON	13	VCCK_ON
113	VCCK_ON	12	VCCK_ON
114	VCCK_ON	11	VCCK_ON
115	VCCK_ON	10	VCCK_ON
116	VCCK_ON	9	VCCK_ON
117	VCCK_ON	8	VCCK_ON
118	VCCK_ON	7	VCCK_ON
119	VCCK_ON	6	VCCK_ON
120	VCCK_ON	5	VCCK_ON
121	VCCK_ON	4	VCCK_ON
122	VCCK_ON	3	VCCK_ON
123	VCCK_ON	2	VCCK_ON
124	VCCK_ON	1	VCCK_ON

Figure 2. Pin Diagram of LQFP156

## 6. Pin Assignments Table

Table 1. Signals Pin Assignment of LQFP156

(I/O Legend: A = Analog, I = Input, O = Output, P = Power, G = Ground)

Pin Name	I/O	Pin #	Description	Note
PVCC	DP	1	Pad Power	(3.3V)
VCCK_OFF	DP	2	Core Power	(1.1V)
NC	NC	3	NC Pin	
NC	NC	4	NC Pin	
NC	NC	5	NC Pin	
NC	NC	6	NC Pin	
DPTX_LANE_P<3>	AO	7	eDPTX	3.3V Tolerance
DPTX_LANE_N<3>	AO	8	eDPTX	3.3V Tolerance
DP_VDD11	AP	9	eDPTX 1.1V Power	(1.1V)
DPTX_LANE_P<2>	AO	10	eDPTX	3.3V Tolerance
DPTX_LANE_N<2>	AO	11	eDPTX	3.3V Tolerance
DP_VDD33	AP	12	eDPTX 3.3V Power	(3.3V)
DPTX_LANE_P<1>	AO	13	eDPTX	3.3V Tolerance
DPTX_LANE_N<1>	AO	14	eDPTX	3.3V Tolerance
DP_VDD11	AP	15	eDPTX 1.1V Power	(1.1V)
DPTX_LANE_P<0>	AO	16	eDPTX	3.3V Tolerance
DPTX_LANE_N<0>	AO	17	eDPTX	3.3V Tolerance
NC	NC	18	NC Pin	3.3V Tolerance
NC	NC	19	NC Pin	3.3V Tolerance
NC	NC	20	NC Pin	3.3V Tolerance
NC	NC	21	NC Pin	3.3V Tolerance
NC	NC	22	NC Pin	3.3V Tolerance
NC	NC	23	NC Pin	3.3V Tolerance

NC	NC	24	NC Pin	3.3V Tolerance
NC	NC	25	NC Pin	3.3V Tolerance
GPIO	AI O	26	MCU GPIO	3.3V Tolerance
GPIO	AI O	27	MCU GPIO	3.3V Tolerance
GPIO	AI O	28	MCU GPIO	3.3V Tolerance
GPIO	AI O	29	MCU GPIO	3.3V Tolerance
GPIO	AI O	30	MCU GPIO	3.3V Tolerance
GPIO	AI O	31	MCU GPIO	3.3V Tolerance
GPIO	AI O	32	MCU GPIO	3.3V Tolerance
GPIO	AI O	33	MCU GPIO	3.3V Tolerance
PVCC	DP	34	Pad Power	(3.3V)
GPIO	AI O	35	MCU GPIO	3.3V Tolerance
GPIO	AI O	36	MCU GPIO	3.3V Tolerance
GPIO	AI O	37	MCU GPIO	3.3V Tolerance
GPIO	AI O	38	MCU GPIO	3.3V Tolerance
GPIO	AI O	39	MCU GPIO	3.3V Tolerance
GPIO	AI O	40	MCU GPIO	3.3V Tolerance
GPIO	AI O	41	MCU GPIO	3.3V Tolerance
GPIO	AI O	42	MCU GPIO	3.3V Tolerance
GPIO	AI O	43	MCU GPIO	3.3V Tolerance
GPIO	AI O	44	MCU GPIO	3.3V Tolerance
VCKK_OFF	DP	45	Core Power	(1.1V)
PVCC	DP	46	Pad Power	(3.3V)
USB_SPI_SO/ INT1 / GPIO / T2	IO	47	SPI Serial Data Output / MCU EXINT / MCU GPIO / Timer	5V Tolerance when power

				off
USB_SPI_CEB0 / IRQB / GPIO / DVS	IO	48	SPI Chip Enable / IRQB / MCU GPIO / DVS	5V Tolerance when power off
USB_SPI_CEB1 / T2EX / GPIO	IO	49	SPI Chip Enable / T2EX / MCU GPIO	5V Tolerance when power off
eDPTX_HPDI / TCON[8] / GPIO	IO	50	eDPTX_HPDI / TCON / MCU GPIO	5V Tolerance when power off
PWM3 / eDPTX_AUX_CH _P_1 / TCON[6] / GPIO	IO	51	PWM / eDPTX_AUX / TCON / MCU GPIO	5V Tolerance when power off
PWM1_0 / eDPTX_AUX_CH _N_1 / TCON[7] / GPIO	IO	52	PWM / eDPTX_AUX / TCON / MCU GPIO	5V Tolerance when power off
PVCC	DP	53	Pad Power	(3.3V)
PWM5 / TCON[2] / GPIO / Test4b	IO	54	PWM / TCON / MCU GPIO / Test4b	5V Tolerance when power off
VCCK_OFF	DP	55	Core Power	(1.1V)
PVCC	DP	56	Pad Power	(3.3V)
SPI_CLK	IO	57	SPI flash serial clock	3.3V Tolerance
SPI_SI	IO	58	SPI flash serial Data Input	3.3V Tolerance
SPI_SO	IO	59	SPI flash serial Data Output	3.3V Tolerance
SPI_CEB	IO	60	SPI flash Chip Enable	3.3V Tolerance
FLASH_WP / GPIO	IO	61	FLASH Write Protect / MCU GPIO	3.3V Tolerance
VCCK_ON	DP	62	Core Power	(1.1V)
PWM2_1 / TCON[1] / IR_RECEIVER / GPIO	IO	63	PWM / TCON / IR Receiver / MCU GPIO	5V Tolerance when power off
TCON[5] / pwm_out / GPIO / Test4b	IO	64	TCON / PWM_OUT / MCU GPIO / Test4b	5V Tolerance when power off
TCON[4] / pwm_in / GPIO / Test4b	IO	65	TCON / PWM_IN / MCU GPIO / Test4b	5V Tolerance when power off

PWM5 / TCON[11] / GPIO	IO	66	PWM / TCON / MCU GPIO	5V Tolerance when power off
IIC_SCL_2 / PWM4 / TCON[11] / GPIO	IO	67	IIC BUS / PWM / TCON / MCU GPIO	5V Tolerance when power off
PWM3 / IIC_SDA_2 / TCON[0] / GPIO	IO	68	PWM / IIC BUS / TCON / MCU GPIO	5V Tolerance when power off
int1 / UART_RX / GPIO / Test4b	IO	69	MCU EXINT / UART RX / MCU GPIO / Test4b	5V Tolerance when power off
int0 / UART_TX / GPIO / Test4b	IO	70	MCU EXINT / UART TX / MCU GPIO / Test4b	5V Tolerance when power off
TCON[13] / GPIO / Test4b / SD0	IO	71	TCON / MCU GPIO / Test4b / I2S	5V Tolerance when power off
TCON[12] / GPIO / Test4b / MCK	IO	72	TCON / MCU GPIO / Test4b / I2S	5V Tolerance when power off
TCON[10] / GPIO / Test4b / SCK	IO	73	TCON / MCU GPIO / Test4b / I2S	5V Tolerance when power off
TCON[9] / GPIO / Test4b / WS	IO	74	TCON / MCU GPIO / Test4b / I2S	5V Tolerance when power off
PVCC	DP	75	Pad Power	(3.3V)
PWM2 / TCON[3] / GPIO	IO	76	PWM / TCON / MCU GPIO	3.3V Tolerance
EI2C_SCL / PWM0 / TCON[1] / GPIO	IO	77	EEPROM IIC BUS / PWM / TCON / MCU GPIO	3.3V Tolerance
EI2C_SDA / PWM1 / TCON[2] / GPIO	IO	78	EEPROM IIC BUS / PWM / TCON / MCU GPIO	3.3V Tolerance
GPIO	IO	79	MCU GPIO	5V Tolerance when power off
GPIO	IO	80	MCU GPIO	5V Tolerance when power off
GPIO / Test4b	IO	81	MCU GPIO / Test4b	5V Tolerance when power off

GPIO / Test4b	IO	82	MCU_GPIO / Test4b	5V Tolerance when power off
TMDS REXT	AI	83	Impedance Match Resistor	12K ohm Reference to GND
GPIO / HDMI_HPD	AI O	84	MCU_GPIO / HDMI Hot-plug	5V Tolerance when power off
RX_33V	AP	85	GDI 3.3V Power	(3.3V)
NC	NC	86	NC Pin	
NC	NC	87	NC Pin	
NC	NC	88	NC Pin	
NC	NC	89	NC Pin	
PGND	AG	90	Ground	
NC	NC	91	NC Pin	
NC	NC	92	NC Pin	
NC	NC	93	NC Pin	
NC	NC	94	NC Pin	
GDI_11V	AP	95	GDI 1.1V Power	(1.1V)
RX_33V	AP	96	GDI 3.3V Power	(3.3V)
RX2P_1	AI	97	TMDS Differential Signal Input	
RX2N_1	AI	98	TMDS Differential Signal Input	
RX1P_1	AI	99	TMDS Differential Signal Input	
RX1N_1	AI	100	TMDS Differential Signal Input	
RX0P_1	AI	101	TMDS Differential Signal Input	
RX0N_1	AI	102	TMDS Differential Signal Input	
RXCP_1	AI	103	TMDS Differential Signal Input	
RXCN_1	AI	104	TMDS Differential Signal Input	
GDI_11V	AP	105	GDI 1.1V Power	(1.1V)
NC	NC	106	NC Pin	
NC	NC	107	NC Pin	
PGND	AG	108	Ground	
NC	NC	109	NC Pin	
NC	NC	110	NC Pin	
PGND	AG	111	Ground	
NC	NC	112	NC Pin	
NC	NC	113	NC Pin	
PGND	AG	114	Ground	
NC	NC	115	NC Pin	
NC	NC	116	NC Pin	
GDI_11V	AP	117	GDI 1.1V Power	(1.1V)
TCON[0] / GPIO / Test4b	IO	118	TCON / MCU_GPIO / Test4b	5V Tolerance when power

				off
TCON[8] / GPIO / Test4b	IO	119	TCON / MCU_GPIO / Test4b	5V Tolerance when power off
ADC_VDD33	AP	120	ADC 3.3V Power	(3.3V)
AVS	AI	121	ADC Vertical Sync Input	5V Tolerance when power off
AHS	AI	122	ADC Horizontal Sync Input	5V Tolerance when power off
B-	AI	123	Negative Blue analog input (Pb-)	3.3V Tolerance
B+	AI	124	Positive Blue analog input (Pb+)	3.3V Tolerance
G-	AI	125	Negative Green analog input (Y-)	3.3V Tolerance
G+	AI	126	Positive Green analog input (Y+)	3.3V Tolerance
SOG	AI	127	Sync-On-Green	3.3V Tolerance
R-	AI	128	Negative RED analog input (Pr-)	3.3V Tolerance
R+	AI	129	Positive RED analog input (Pr+)	3.3V Tolerance
ADC_GND	AG	130	ADC Ground	
DDCSCL_VGA / GPIO	IO	131	DDC VGA (Open drain I/O) / MCU GPIO	5V Tolerance when power off
DDCSDA_VGA / GPIO	IO	132	DDC VGA (Open drain I/O) / MCU GPIO	5V Tolerance when power off
PWM0 / TCON[4] / GPIO / Test4b	IO	133	PWM / TCON / MCU_GPIO / Test4b	5V Tolerance when power off
VCK_ON	DP	134	Core Power	(1.1V)
GPIO	IO	135	MCU GPIO	5V Tolerance when power off
GPIO	IO	136	MCU GPIO	5V Tolerance when power off
DDCSCL1 / GPIO	IO	137	DDC Channel (Open drain I/O) / MCU GPIO	5V Tolerance when power off



DDCSDA1 / GPIO	IO	138	DDC Channel (Open drain I/O) / MCU GPIO	5V Tolerance when power off
PVCC	DP	139	Pad Power	(3.3V)
XI	AI	140	Crystal Input	3.3V Tolerance
XO	AO	141	Crystal Output	3.3V Tolerance
PVCC	DP	142	Pad Power	(3.3V)
A-ADC0/ INT0 / GPIO / Test4b	AI O	143	5bits MCU ADC Input / MCU EXINT / MCU GPIO / Test4b	3.3 V tolerance when using ADC Input; 5V Tolerance power on when using GPIO
A-ADC1 / INT1 / GPIO / Test4b	AI O	144	5bits MCU ADC Input / MCU EXINT / MCU GPIO / Test4b	3.3 V tolerance when using ADC Input; 5V Tolerance power on when using GPIO
PVCC	DP	145	Pad Power	(3.3V)
VCKK_ON	DP	146	Core Power	(1.1V)
AUDIO_HOUTL / SD2 / SPDIF2 / GPIO	AI O	147	AUDIO_HOUTL / I2S / SPDIF / MCU GPIO	3.3V Tolerance
AUDIO_HOURL / SD3 / SPDIF3 / GPIO	AI O	148	AUDIO_HOUTL / I2S / SPDIF / MCU GPIO	3.3V Tolerance
AUDIO_HP_GND	AG	149	AUDIO HP Ground	
AUDIO_HP_AVD D33	AP	150	AUDIO HP 3.3V Power	(3.3V)
LINE_INL / WS / GPIO	AI O	151	LINE_INL / I2S / MCU GPIO	3.3V Tolerance
LINE_INR / SCK / GPIO	AI O	152	LINE_INR / I2S / MCU GPIO	3.3V Tolerance
AUDIO_REF / MCK / GPIO	AI O	153	AUDIO_REF / I2S / MCU GPIO	3.3V Tolerance
AUDIO_SOUTL / SD0 / SPDIF0 / GPIO	AI O	154	AUDIO_SOUTL / I2S / SPDIF / MCU GPIO	3.3V Tolerance

AUDIO_SOUTR / SD1 / SPDIF1 / GPIO	AI O	155	AUDIO_SOUTR / I2S / SPDIF / MCU GPIO	3.3V Tolerance
AUDIO_VDD33	AP	156	Audio DAC 3.3V Power	(3.3V)

Confidential - Realtek  
 專售 原廠  
 Only for

## 7. Electrical Specifications

Electrical Specifications

LQFP156 DC Characteristics (RTD2556-CG Series)

### 7.1. Recommended Operating Conditions

Table 2. Recommended Operating Conditions of LQFP156

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS
Voltage on Input (5V tolerance)	$V_{IN}$	-1		5.3	V
Supply Voltage	PVCC	3.14	3.30	3.47	V
Core Power On Voltage	VCCK_ON	1.05	1.1	1.15	V
Core Power Off Voltage	VCCK_OFF	1.05	1.1	1.15	V
Electrostatic Discharge	$V_{ESD}$			±2.5	kV
Latch-Up	$I_{LA}$			±100	mA
Ambient Operating Temperature	$T_A$	0		70	°C
Storage Temperature (plastic)	$T_{STG}$	-55		110	°C
Thermal Resistance (Junction to Air)	$\theta_{JA}$		25.2		°C/W
Thermal Resistance (Junction to Case)	$\theta_{JC}$		10.1		°C/W
Junction Acceptable Temperature	$T_j$			125	°C

### 7.2. Absolute Maximum Ratings

Table 3. Absolute Maximum Ratings of LQFP156

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS
Supply Voltage	PVCC			3.6	V
Storage Temperature (plastic)	$T_{STG}$			150	°C
Junction Acceptable Temperature	$T_j$			125	°C

**Note :** Operation under the absolute maximum ratings does not imply well-functioning. Long-term stress to the absolute maximum ratings would probably affect the device reliability or further cause permanent damage.

### 7.3. Reset Period

Table 4. Reset Period of LQFP156

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS
Reset Pulse Period	$Trst-en^1$	1120			ns
Power-on-Reset Period	$Tpor-rst^2$	145	146.5	148	ms

- $16 * Xtal\_cycle(1/14.3Mhz)$
- $65536*16*2*Xtal\_cycle(1/14.3Mhz)$

## 8. Mechanical Specifications

Thermal Enhanced Low Profile Plastic Quad Flat Package 156 Leads

### 14x20mm<sup>2</sup> Outline

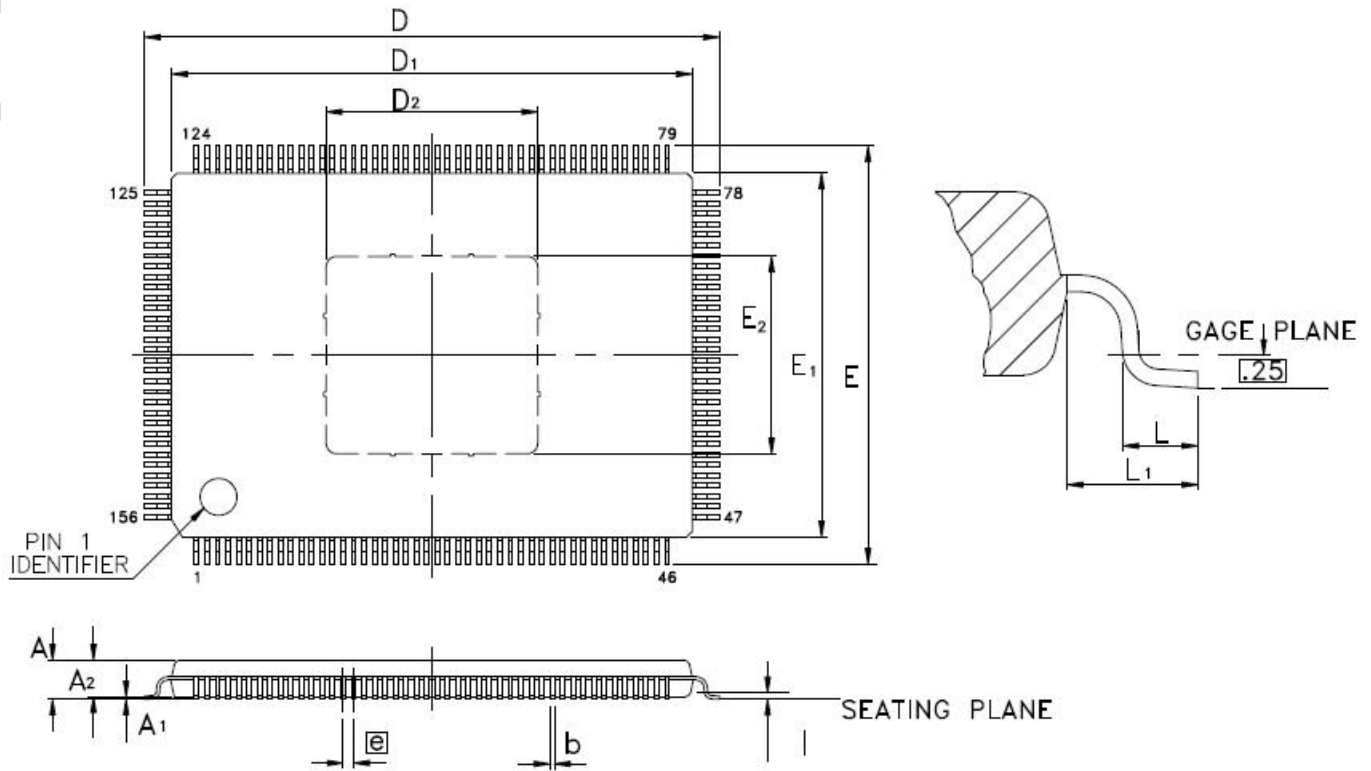


Figure 3. Mechanical Specification of LQFP156 Leads

**Table 5. Mechanical Specification of LQFP156 Leads**

Symbol	Dimension in mm			Dimension in inch		
	Min	Nom	Max	Min	Nom	Max
A	—	—	1.60	—	—	0.063
A <sub>1</sub>	0.05	—	0.15	0.002	—	0.006
A <sub>2</sub>	1.35	1.40	1.45	0.053	0.055	0.057
b	0.13	0.18	0.23	0.005	0.007	0.009
D	21.90	22.00	22.10	0.862	0.866	0.870
E	15.90	16.00	16.10	0.626	0.630	0.634
D <sub>1</sub>	19.90	20.00	20.10	0.783	0.787	0.791
E <sub>1</sub>	13.90	14.00	14.10	0.547	0.551	0.555
D <sub>2</sub>	7.85	8.10	8.35	0.309	0.319	0.329
E <sub>2</sub>	7.30	7.55	7.80	0.287	0.297	0.307
e	0.40 BSC			0.016 BSC		
L	0.45	0.60	0.75	0.018	0.024	0.030
L1	1.00 REF			0.039 REF		

Notes :

1. CONTROLLING DIMENSION : MILLIMETER(mm).

## 9. Ordering Information

**Table 6. Ordering Information**

Part No.	Max. Resolution	Input : VGA	Input : DP1.2 / HDMI1.4/ DVI	Output : eDP	PKG
RTD2556-CG	1920x1080 @60Hz	•	1 Ports	•	LQFP156

---

**Realtek Semiconductor Corp.****Headquarters**

No. 2, Innovation Road II  
Hsinchu Science Park, Hsinchu 300, Taiwan  
Tel.: +886-3-578-0211. Fax: +886-3-577-6047  
www.realtek.com