

SWITCHING MODE POWER SUPPLY APPLICATION  
CONVERTER & CHOPPER APPLICATION.


#### FEATURES

- Super-Fast Recovery Time for High Efficiency.
- Low Forward Voltage Drop, High Current Capability, and Low Power Loss.

#### APPLICATION

- Switching Power Supply.
- Home Appliances, Office Equipment.
- Telecommunication, Factory Automation.

#### POLARITY



#### MAXIMUM RATINGS (Ta=25 °C)


CHARACTERISTIC	SYMBOL	RA. MIN.	UNIT
Maximum Reverse Voltage	$V_{RM}$	200	V
Average Output Rectified Current (Tc=125 °C) (Note1)	$I_O$	10	A
Peak One Cycle Surge Forward Current (Non-Repetitive)	$I_{FSM}$	50 (50Hz)	A
		60 (60Hz)	
Junction Temperature	$T_j$	-40~150	°C
Storage Temperature Range	$T_{stg}$	-40~150	°C

(Note1) : Average forward current of centertap full wave connection.

#### ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Peak Forward Voltage (Note2)	$V_{FM}$	$I_{FM}=5A$	-	-	0.98	V
Reverse Current (Note2)	$I_{RM}$	$V_{RM}=\text{Rated}$	-	-	10	$\mu A$
Reverse Recovery Time (Note2)	$t_{rr}$	$I_F=I_R=100mA$	-	-	100	ns
Thermal Resistance (Note2)	$R_{th(j-c)}$	Junction to Case	-	-	3.6	/W

(Note2) : A Value of one cell.

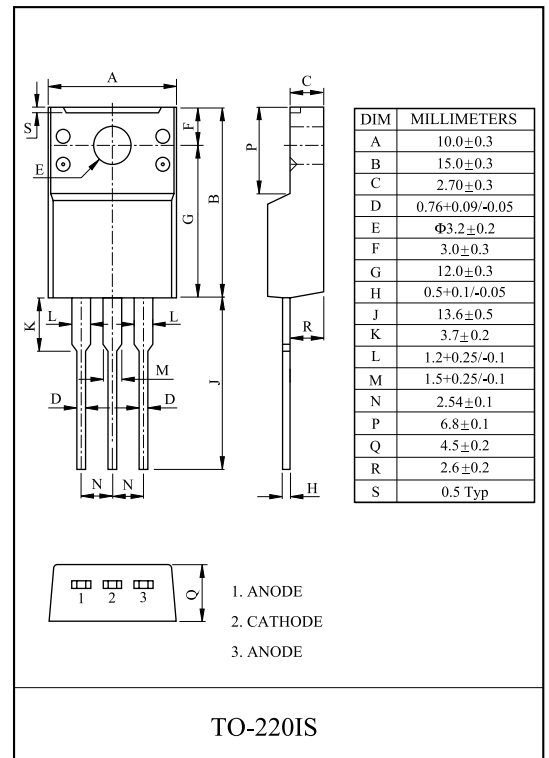

Not recommended for new design

# S10A2CIA

