


# S3PDB85

## Three Phase Rectifier Modules




www.DataSheet4U.com



| Type       | $V_{RSM}$<br>V | $V_{RRM}$<br>V |
|------------|----------------|----------------|
| S3PDB85N08 | 900            | 800            |
| S3PDB85N12 | 1300           | 1200           |
| S3PDB85N14 | 1500           | 1400           |
| S3PDB85N16 | 1700           | 1600           |
| S3PDB85N18 | 1900           | 1800           |

Dimensions in mm (1mm=0.0394")

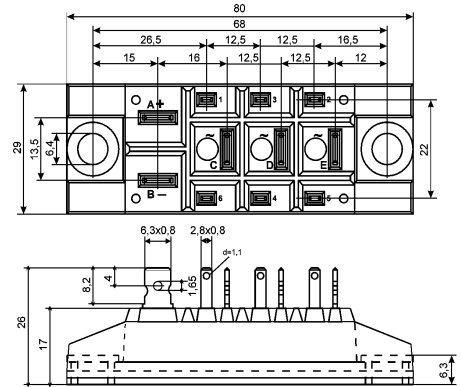

| Symbol                             | Test Conditions  | Maximum Ratings                 | Unit         |
|------------------------------------|--|---------------------------------|--------------|
| $I_{dav}$                          | $T_C=100^{\circ}C$ , module  | 85                              | A            |
| $I_{FSM}$                          | $T_{VJ}=45^{\circ}C$<br>$V_R=0$<br>$t=10ms$ (50Hz), sine<br>$t=8.3ms$ (60Hz), sine | 750<br>820                      | A            |
|                                    | $T_{VJ}=T_{VJM}$<br>$V_R=0$<br>$t=10ms$ (50Hz), sine<br>$t=8.3ms$ (60Hz), sine     | 600<br>700                      |              |
| $I^2t$                             | $T_{VJ}=45^{\circ}C$<br>$V_R=0$<br>$t=10ms$ (50Hz), sine<br>$t=8.3ms$ (60Hz), sine | 2800<br>2820                    | $A^2s$       |
|                                    | $T_{VJ}=T_{VJM}$<br>$V_R=0$<br>$t=10ms$ (50Hz), sine<br>$t=8.3ms$ (60Hz), sine     | 2200<br>2250                    |              |
| $T_{VJ}$<br>$T_{VJM}$<br>$T_{stg}$ |  | -40...+150<br>150<br>-40...+125 | $^{\circ}C$  |
| $V_{ISOL}$                         | 50/60Hz, RMS<br>$I_{ISOL} \leq 1mA$<br>$t=1min$<br>$t=1s$                          | 2500<br>3000                    | V~           |
| $M_d$                              | Mounting torque (M5)<br>(10-32 UNF)  | $5 \pm 15\%$<br>$44 \pm 15\%$   | Nm<br>lb.in. |
| Weight                             | typ.   | 110                             | g            |



www.DataSheet4U.com

# S3PDB85

## Three Phase Rectifier Modules

| Symbol                  | Test Conditions  | Characteristic Values | Unit             |
|-------------------------|--|-----------------------|------------------|
| <b>I<sub>R</sub></b>    | V <sub>R</sub> =V <sub>RRM</sub> ; T <sub>VJ</sub> =25°C<br>V <sub>R</sub> =V <sub>RRM</sub> ; T <sub>VJ</sub> =T <sub>VJM</sub> | ≤ 0.5<br>< 10         | mA               |
| <b>V<sub>F</sub></b>    | I <sub>F</sub> =150A; T <sub>VJ</sub> =25°C  | ≤ 1.6                 | V                |
| <b>V<sub>TO</sub></b>   | For power-loss calculations only   | 0.8                   | V                |
| <b>r<sub>T</sub></b>    | T <sub>VJ</sub> =T <sub>VJM</sub>  | 6                     | mΩ               |
| <b>R<sub>thJC</sub></b> | per diode<br>per module  | 1.3<br>0.22           | K/W              |
| <b>R<sub>thJK</sub></b> | per diode<br>per module  | 1.6<br>0.27           | K/W              |
| <b>d<sub>s</sub></b>    | Creeping distance on surface   | 16.1                  | mm               |
| <b>d<sub>A</sub></b>    | Creepage distance in air   | 7.5                   | mm               |
| <b>a</b>                | Max. allowable acceleration  | 50                    | m/s <sup>2</sup> |

### FEATURES

- \* Package with copper base plate
- \* Isolation voltage 3000 V~
- \* Planar passivated chips
- \* 1/4" fast-on power terminals
- \* Low forward voltage drop

### APPLICATIONS

- \* Supplies for DC power equipment
- \* Input rectifiers for PWM inverter
- \* Battery DC power supplies
- \* Field supply for DC motors

### ADVANTAGES

- \* Easy to mount with two screws
- \* Space and weight savings
- \* Improved temperature and power cycling