


AM/FM AMPLIFIER, LOCAL OSCILLATOR OF FM/VHF TUNER

- Collector-Emitter Voltage: $V_{CEO} = 18V$
- Collector Dissipation: $P_C = 200mW$

Absolute Maximum Ratings (TA=25°C)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CBO}	25	V
Collector-Emitter Voltage	V_{CEO}	18	V
Emitter-Base Voltage	V_{EBO}	4	V
Collector Current	I_C	50	mA
Collector Dissipation	P_C	200	mW
Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-55~+150	°C

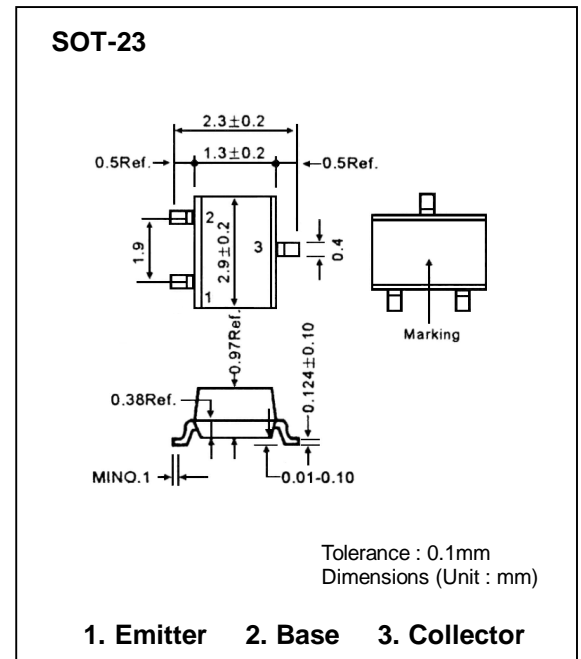

Electrical Characteristics (TA=25°C)

Characteristic	Symbol	Test Conditions	Min	Max	Unit
Collector-Base Breakdown Voltage	BV_{CBO}	$I_C = 100\mu A, I_E = 0$	25		V
Collector-Emitter Breakdown Voltage	BV_{CEO}	$I_C = 0.1mA, I_B = 0$	18		V
Emitter-Base Breakdown Voltage	BV_{EBO}	$I_E = 100\mu A, I_C = 0$	4		V
Collector Cut-off Current	I_{CBO}	$V_{CB} = 20V, I_E = 0$		0.1	μA
Collector Cut-off Current	I_{CEO}	$V_{CE} = 15V, I_E = 0$		0.1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB} = 3V, I_C = 0mA$		0.1	μA
DC Current Gain	h_{FE}	$V_{CE} = 5V, I_C = 1mA$	70	190	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 10mA, I_B = 1mA$		0.5	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 10mA, I_B = 5mA$		1.4	V
Transition Frequency	f_T	$V_{CE} = 5V, I_C = 5mA$ $f = 400MHz$	600		MHz

Device Marking

S9018LT1=J8