

# 2SD818

SILICON NPN TRIPLE DIFFUSED MESA TYPE


COLOR TV HORIZONTAL OUTPUT APPLICATIONS.

FEATURES:

- High Voltage :  $V_{CB0}=1500V$
- Low Saturation Voltage :  $V_{CE(sat)}=4V$  (Typ.)
- High speed :  $t_f=0.5\mu s$  (Typ.)
- Glass Passivated Collector-Base Junction.

MAXIMUM RATINGS ( $T_a=25^\circ C$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector Base Voltage	$V_{CB0}$	1500	V
Collector Emitter Voltage	$V_{CEO}$	600	V
Emitter Base Voltage	$V_{EBO}$	5	V
Collector Current	$I_C$	2.5	A
Emitter Current	$I_E$	-2.5	A
Collector Power Dissipation ( $T_c=25^\circ C$ )	PC	50	W
Junction Temperature	$T_j$	150	$^\circ C$
Storage Temperature Range	$T_{stg}$	-65~150	$^\circ C$

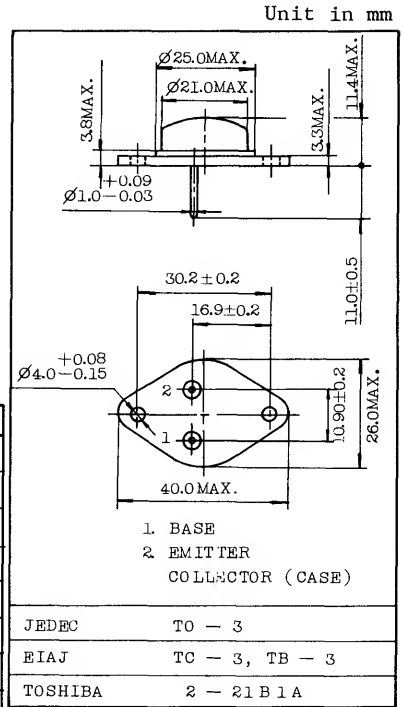

ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ C$ )

Mounting kit No. AC42C  
Weight : 17g

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB}=500V, I_E=0$	-	-	10	$\mu A$
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=5V, I_C=0$	-	-	1	mA
DC Current Gain	$h_{FE}$	$V_{CE}=5V, I_C=0.5A$	8	20	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=2.0A, I_B=0.6A$	-	4	8	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=2.0A, I_B=0.6A$	-	-	1.5	V
Transition Frequency	$f_T$	$V_{CE}=10V, I_C=0.1A$	-	3	-	MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB}=10V, I_E=0, f=1MHz$	-	95	-	pF
Fall Time	$t_f$	$I_{CP}=2.0A, I_{B1}(end)=0.6A$ (Fig.)	-	0.5	1.0	$\mu s$

Fig.  $t_f$  TEST CIRCUIT

