

# Datasheet of SAW Device


## SAW Duplexer

for Band5 / Balanced / LR /1814

Murata PN: SAYEY836MCA0F0A

### ■ Feature

- Smallest size
- Low Insertion Loss

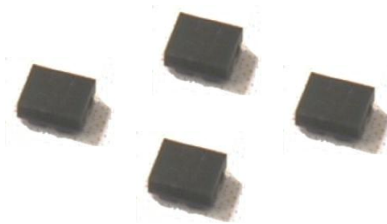

Note : Murata SAW Component is applicable for Cellular /Cordless phone (Terminal) relevant market only.  
Please also read caution at the end of this document.

## SAYEY836MCA0F0A ( Band5 / Balanced / LR / 1814 )

Revision No.	Date	Description
SAYEY836MCA0F0A_rev. A	Jul-11-2013	■ Initial Release
SAYEY836MCA0F0A_rev. B	Aug-07-2013	
SAYEY836MCA0F0A_rev. C	Feb-14-2014	
SAYEY836MCA0F0A_rev. D	Apr-10-2014	■ Updated for MP
SAYEY836MCA0F0A_rev. E	Aug-21-2014	■ Updated electric performance(Tx Att.)


- Operating temperature : -20 to +85 deg.C
- Storage temperature : -40 to +85 deg.C
- Input Power : +29 dBm 5000 h 55 deg.C
- D.C. Volatage between the terminals : 3V (25+/-2 deg.C)
- Minimum Resistance between the terminal : 10M ohm
- RoHS compliance : Yes

**SAYEY836MCA0F0A ( Band5 / Balanced / LR / 1814 )**

**Package Dimensions & Recommended Land Pattern**

unit: mm

**Dimensions**

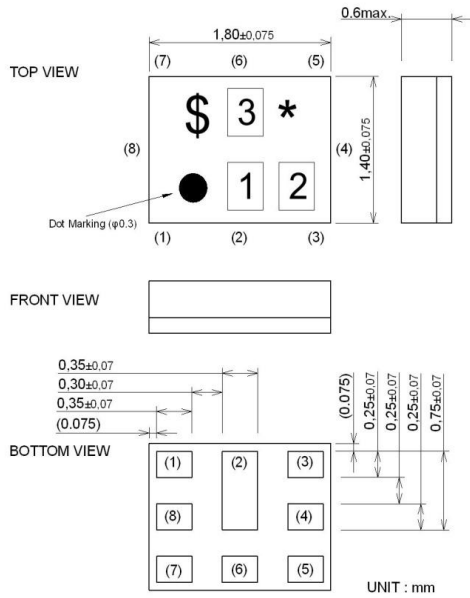

Marking : Laser Printing

\* : Month code(Refer to the table A)

\$ : Date code(Refer to the table B)

1 : 4

2 : X

3 : A

Terminal Number

(6) : Ant


(3) : TX

(1)(8) : RX


Others : GND.

Notice) Please refer to Measurement Circuit for Port information in detail.

**Land Pattern**

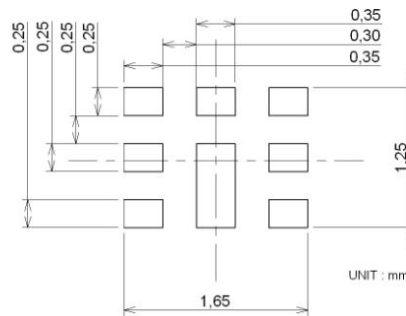

**Measurement Circuit (Top View)**

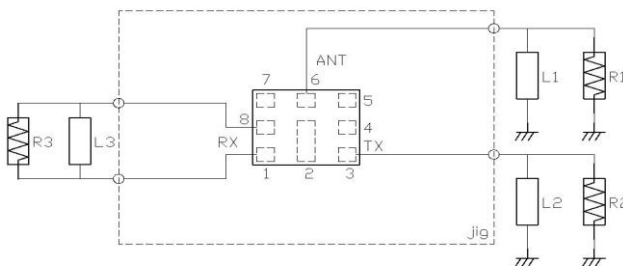

R1 : 50 ohm	L1 :7.2nH(Ideal inductor)
	:8.1nH(LQP0603TN8N1)
	<Reference>
R2 : 50 ohm	L2 :25nH(Ideal inductor)
R3 : 100 ohm	L3 :30nH(Ideal inductor)

**SAYEY836MCA0F0A (Band5 / Balanced / LR / 1814)**

**Electrical Characteristic < TX→ANT. >**

TX → ANT.				Characteristics (-20 to +85 deg.C)			Unit	Note
				min.	typ.	max.		
				Center Frequency				
Insertion Loss	824. to 849. MHz		1.4	1.9	dB			
	824. to 849. MHz		1.4	1.7	dB	+23 to +27deg.C		
	826.4 to 846.6 MHz		1.2	1.7	dB <sub>INT</sub>	Any 3.84MHz		
Ripple Deviation	824. to 849. MHz		0.4	1.3	dB	Any 5MHz		
VSWR	824. to 849. MHz		1.3	1.9		TX		
	824. to 849. MHz		1.4	1.9		ANT.		
Absolute Attenuation	10. to 701. MHz	30	36		dB			
	699. to 716. MHz	30	36		dB	B12,B17 Tx CA		
	701. to 728. MHz	30	36		dB			
	728. to 764. MHz	30	36		dB			
	764. to 804. MHz	35	40		dB			
	860. to 869. MHz	3	8		dB			
	869. to 894. MHz	44	54		dB	Rx		
	1559. to 1563. MHz	35	39		dB	Compass		
	1565.42 to 1573.37 MHz	35	39		dB	Wideband GPS, lower side-lobe		
	1573.37 to 1577.46 MHz	35	39		dB	Regular GPS, main-lobe		
	1577.46 to 1585.42 MHz	35	39		dB	Wideband GPS, upper side-lobe		
	1597.55 to 1605.89 MHz	35	38		dB	GLONASS		
	1638. to 1708. MHz	32	37		dB	2f		
	1710. to 1785. MHz	31	37		dB	B3,B4 Tx CA		
	1844.9 to 1879.9 MHz	31	36		dB			
	1884.5 to 1919.6 MHz	31	36		dB			
	1920. to 1990. MHz	30	35		dB	B1 Tx CA, PCS Rx Att		
	2110. to 2170. MHz	30	35		dB	B1Rx		
	2400. to 2557. MHz	30	36		dB	2.4GHz ISM, 3f		
	3286. to 3406. MHz	7	15		dB	4f		
	4110. to 4255. MHz	3	10		dB	5f		
	4900. to 5950. MHz	5	10		dB	5GHz ISM,6f,7f		
	6582. to 6802. MHz	7	16		dB	8f		
	7406. to 7651. MHz	8	17		dB	9f		
	8230. to 8500. MHz	8	16		dB	10f		
	9054. to 9349. MHz	5	12		dB	11f		
	9878. to 10198. MHz	5	12		dB	12f		
	10702. to 11047. MHz	2	8		dB	13f		
11526. to 11896. MHz	2	7		dB	14f			
12350. to 12745. MHz	2	9		dB	15f			

\* Typical value at 25±2deg.C

SAYEY836MCA0F0A ( Band5 / Balanced / LR / 1814 )

Electrical Characteristic < ANT. → RX. >

ANT. → RX	Characteristics ( -20 to +85 deg.C )			Unit	Note	
	min.	typ.	max.			
	Center Frequency		881.5			
Insertion Loss	869. to 894. MHz	2	2.3	dB		
	869. to 894. MHz	2	2.2	dB	+23 to +27deg.C	
	871.4 to 891.6 MHz	1.8	2.1	dB <sub>INT</sub>	Any 3.84MHz	
Ripple Deviation	869. to 894. MHz	0.4	1.3	dB	Any 5MHz	
VSWR	869. to 894. MHz	1.6	2.0		RX	
	869. to 894. MHz	1.6	2.0		ANT.	
Amplitude Balance	869. to 894. MHz	-0.8	0.2	0.8	dB	
Phase Balance	869. to 894. MHz	172	182	188	deg.	
Absolute Attenuation	10. to 447. MHz	50	73		dB	
	45. MHz	50	126		dB	RX-TX
	447. to 824. MHz	50	57		dB	
	779. to 804. MHz	50	58		dB	2TX-RX
	824. to 849. MHz	45	59		dB	TX
	849. to 854. MHz	17	54		dB	(RX+TX)/2
	909. to 979. MHz	15	22		dB	
	979. to 6000. MHz	34	43		dB	
	1693. to 1743. MHz	45	52		dB	RX+TX
	1710. to 1785. MHz	45	52		dB	B3/4 TX CA
	1785. to 1788. MHz	45	53		dB	2f
	1788. to 13025. MHz	23	33		dB	
	1850. to 1920. MHz	45	52		dB	B2 TX CA
	1920. to 1980. MHz	45	52		dB	B1 TX CA
	1980. to 2400. MHz	45	50		dB	
	2305. to 2315. MHz	45	50		dB	WCS TX CA
	2400. to 2500. MHz	44	49		dB	ISM2.4
	2467. to 2494. MHz	44	49		dB	WLAN coexistence
	2517. to 2592. MHz	44	49		dB	RX+2TX
	2607. to 2682. MHz	44	49		dB	3f
	3476. to 3576. MHz	40	47		dB	4f
	4345. to 4470. MHz	40	45		dB	5f
	4900. to 5950. MHz	34	43		dB	ISM 5G
	5214. to 5364. MHz	35	43		dB	6f
	6083. to 6258. MHz	39	57		dB	7f
	6952. to 7152. MHz	27	43		dB	8f
7821. to 8046. MHz	25	36		dB		
8690. to 8940. MHz	25	34		dB		
9559. to 9834. MHz	30	39		dB		
10428. to 10728. MHz	30	41		dB		
11297. to 11622. MHz	30	39		dB		
12116. to 12516. MHz	25	33		dB		

\* Typical value at 25±2deg.C

SAYEY836MCA0F0A ( Band5 / Balanced / LR / 1814 )

Electrical Characteristic < TX → RX. >



TX → RX	Characteristics ( -20 to +85 deg.C )			Unit	Note		
	min.	typ.	max.				
	Isolation						
Differential Mode	824. to 849. MHz	56	60				
	826.4 to 846.6 MHz	56	62		dB <sub>INT</sub>	Any 3.84MHz	
	869. to 894. MHz	51	53		dB		
	871.4 to 891.6 MHz	51	54		dB <sub>INT</sub>	Any 3.84MHz	
	1574. to 1577. MHz	50	65		dB		
	1638. to 1708. MHz	50	62		dB		
	2462. to 2557. MHz	50	58		dB		
Common Mode	824. to 849. MHz	50	55		dB		
	826.4 to 846.6 MHz	50	55		dB <sub>INT</sub>	Any 3.84MHz	

\* Typical value at 25±2deg.C

SAYEY836MCA0F0A ( Band5 / Balanced / LR / 1814 )

Electrical Characteristic



< TX→ANT. >

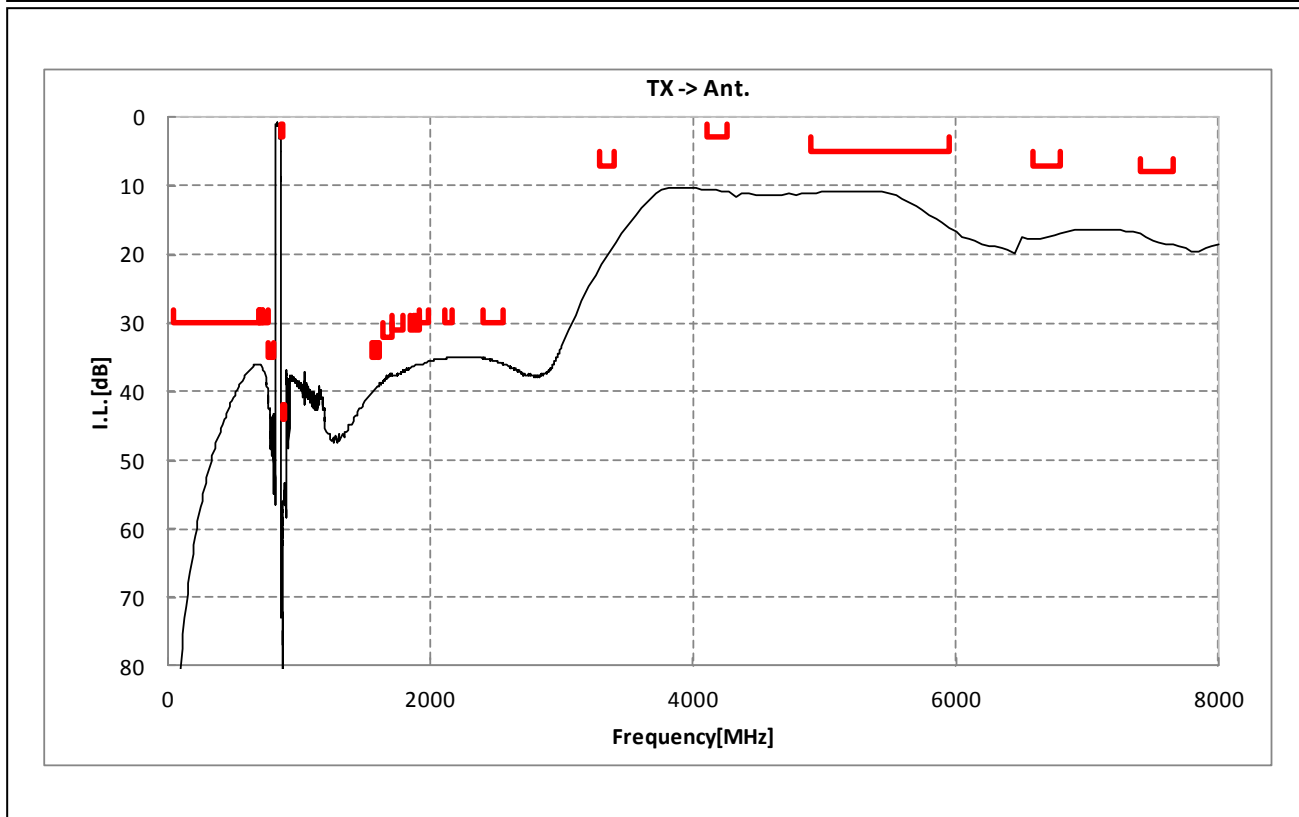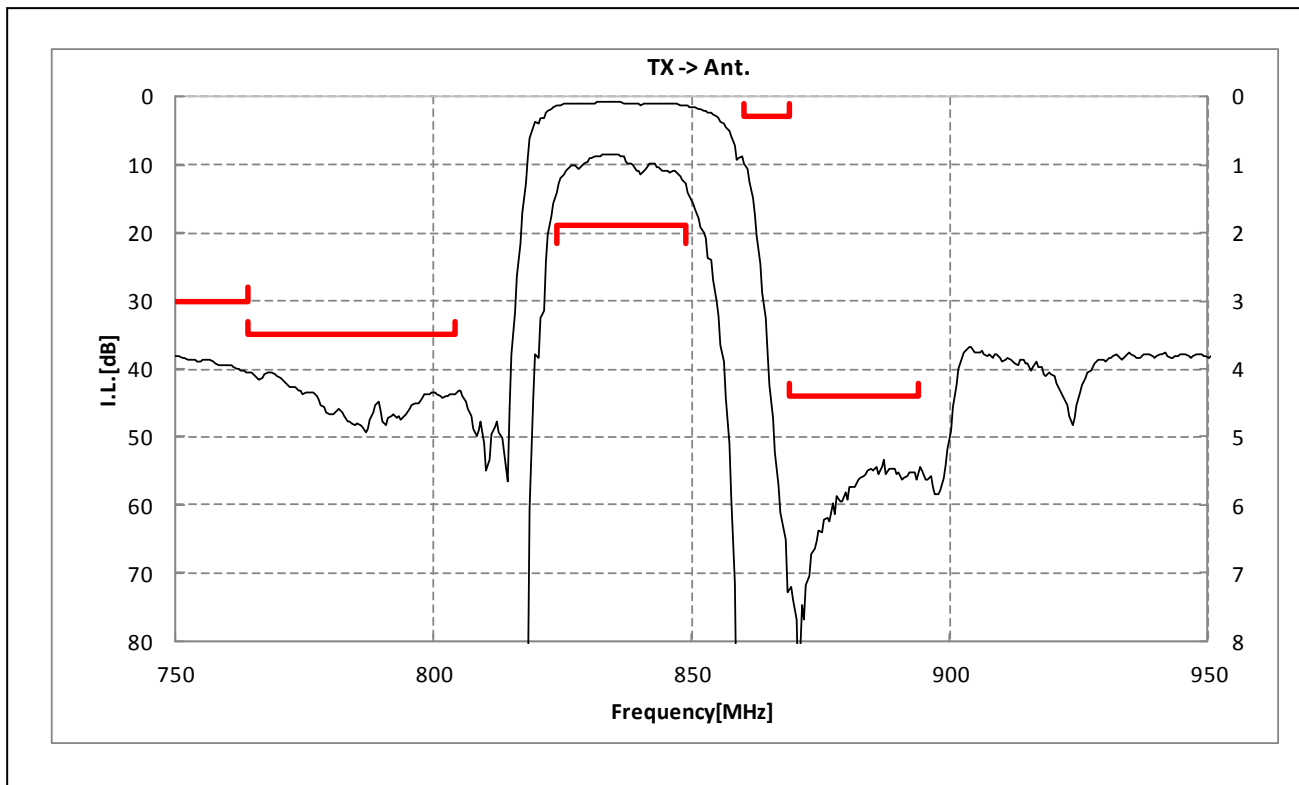

SAYEY836MCA0F0A ( Band5 / Balanced / LR / 1814 )

Electrical Characteristic

< ANT. → RX. >

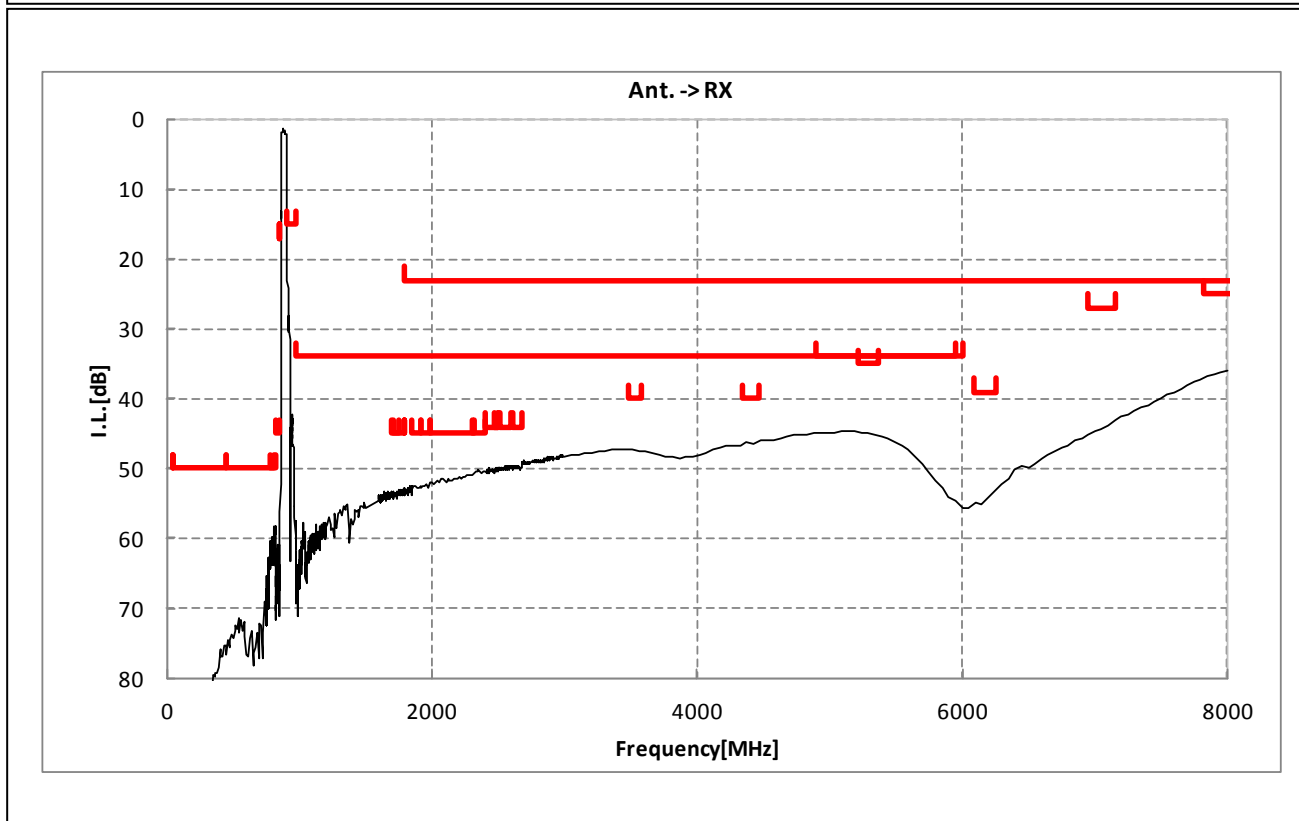
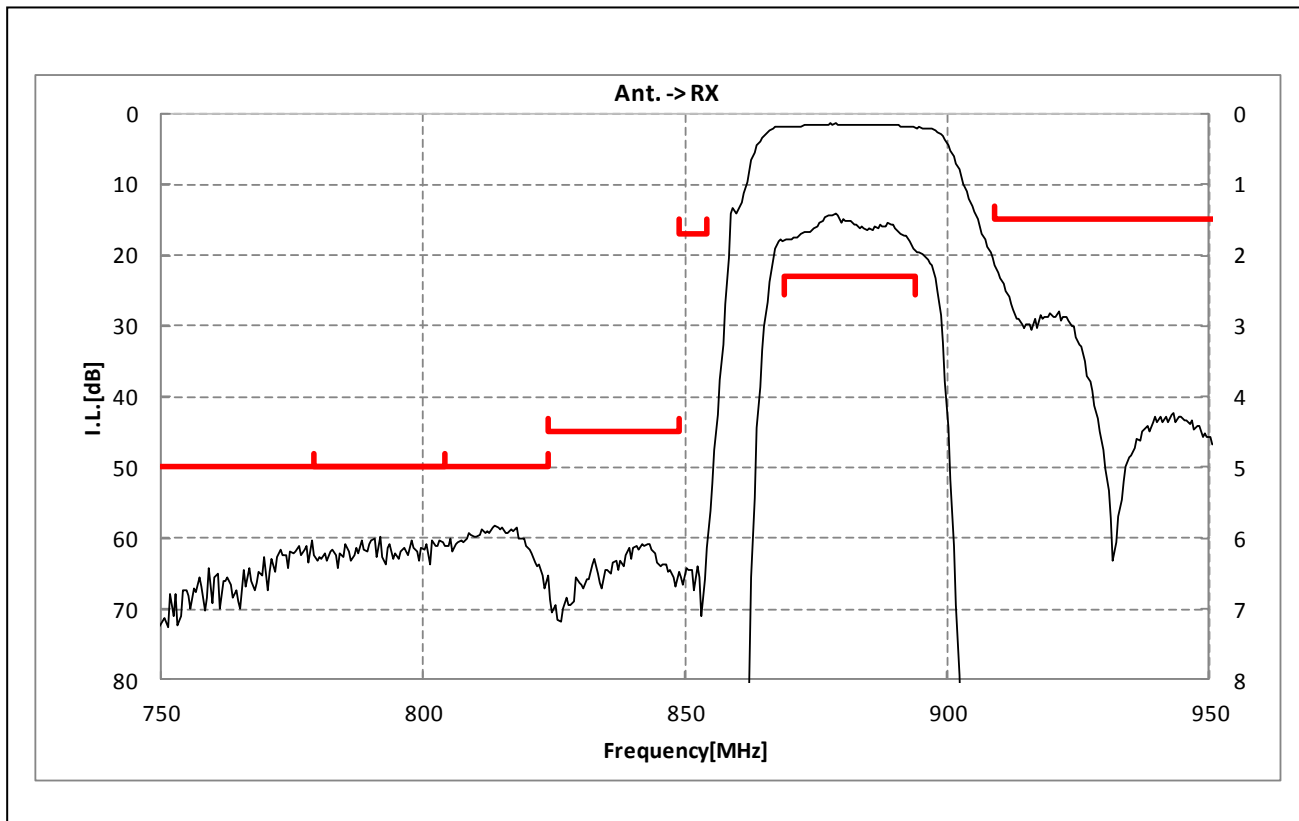




SAYEY836MCA0F0A ( Band5 / Balanced / LR / 1814 )

Electrical Characteristic


< TX→RX. >

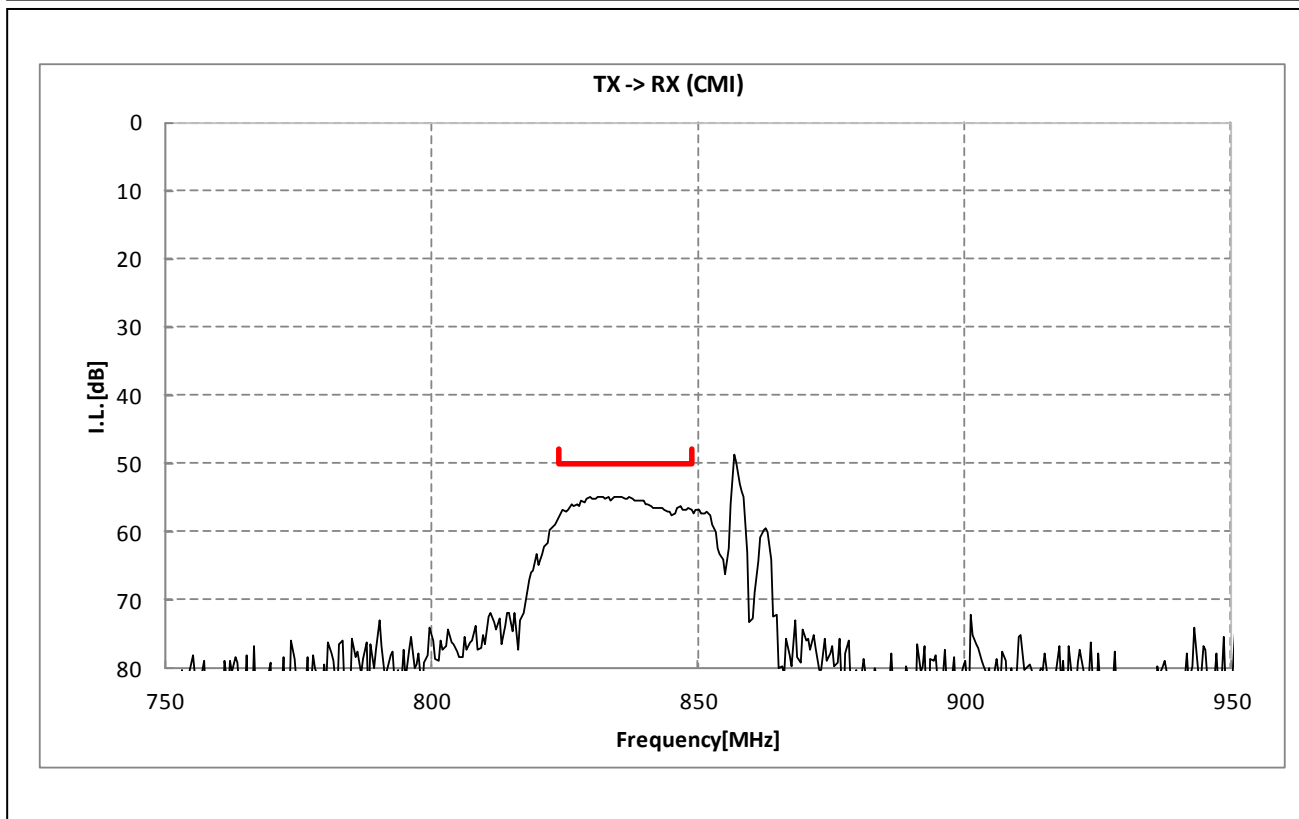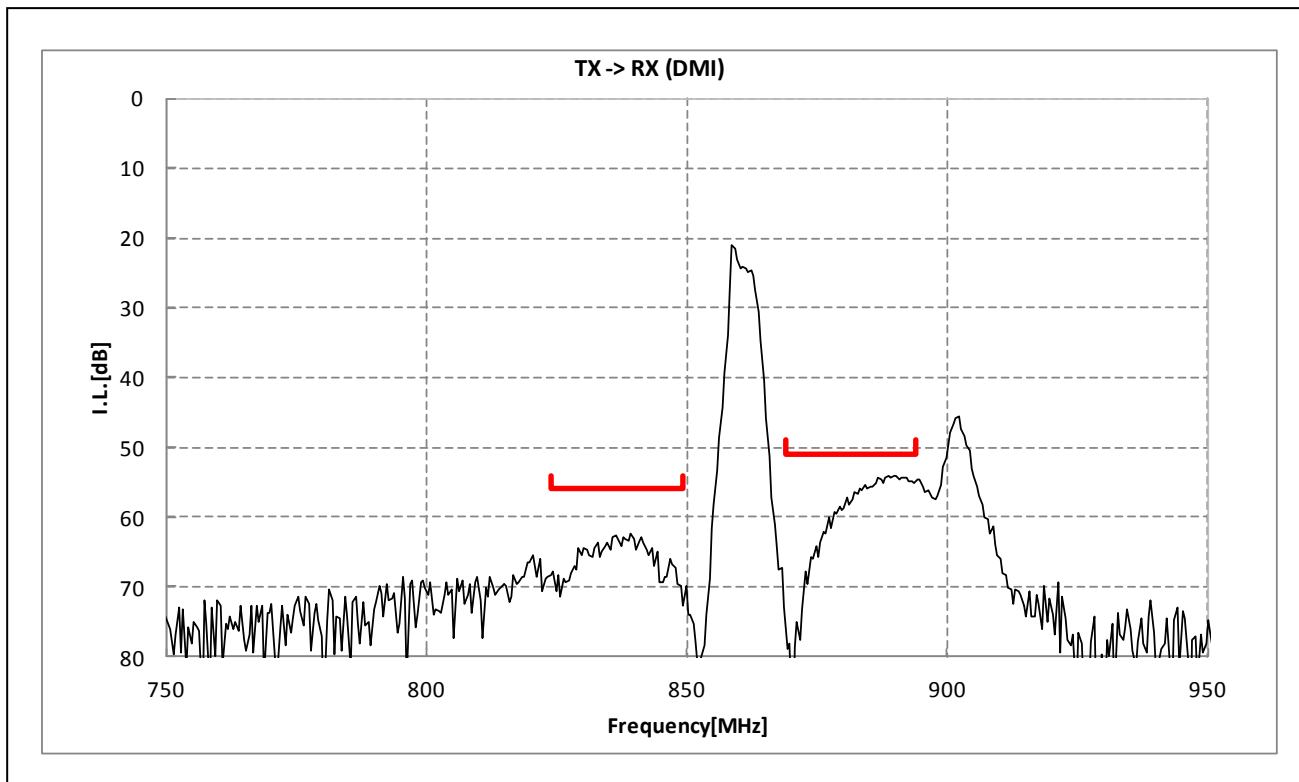


**SAYEY836MCA0F0A ( Band5 / Balanced / LR / 1814 )**

**Dimensions of Tape & Reel** unit: mm


**Carrier Tape**

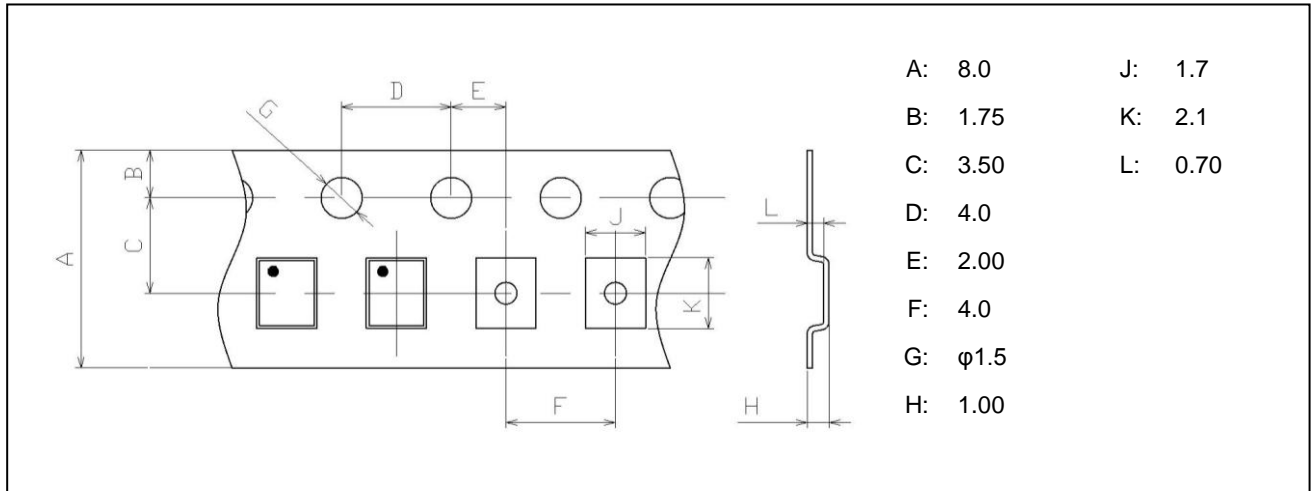

**Tape**

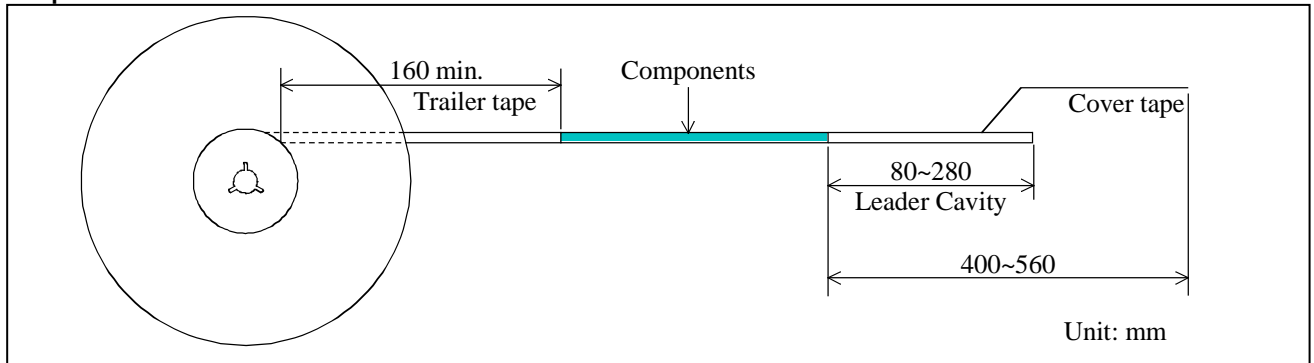

**Reel**

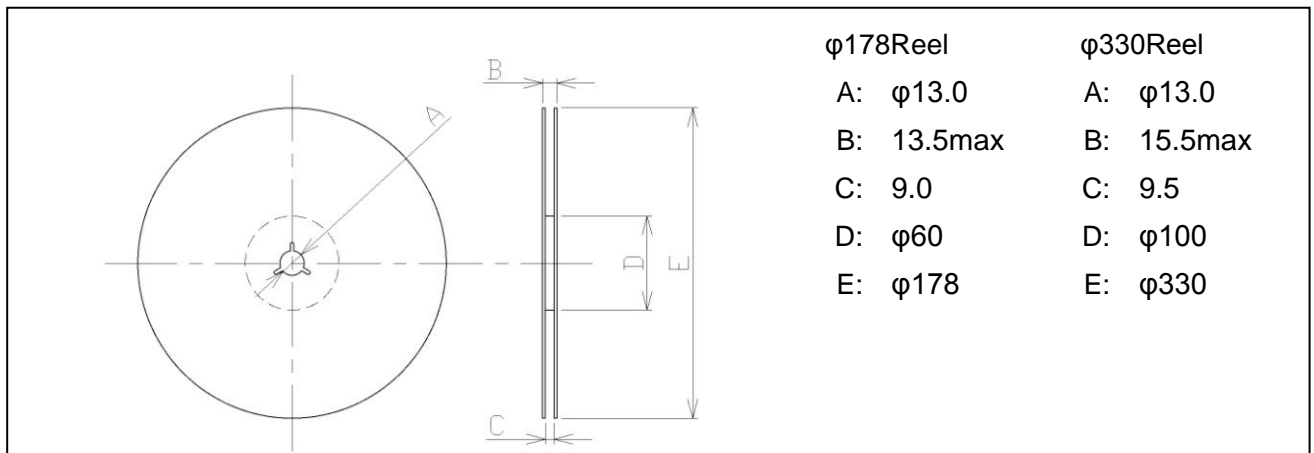

SAYEY836MCA0F0AR00... 10000pcs (φ330)  
 SAYEY836MCA0F0AR05... 5000pcs (φ330)  
 SAYEY836MCA0F0AR1S... sample Order (φ178/330)

## SAYEY836MCA0F0A ( Band5 / Balanced / LR / 1814 )

## Marking Code

**Table A: Month Code**

2009 2013 2017	Jan.	Feb.	Mar.	Apr.	May	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
	A	B	C	D	E	F	G	H	J	K	L	M
2010 2014 2018	Jan.	Feb.	Mar.	Apr.	May	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
	N	P	Q	R	S	T	U	V	W	X	Y	Z
2011 2015 2019	Jan.	Feb.	Mar.	Apr.	May	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
	a	b	c̄	d	e	f	g	h	j	k	l	m
2012 2016 2020	Jan.	Feb.	Mar.	Apr.	May	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
	n	p	q	r	s	t	u	v	w	x	y	z

**Table B: Date Code**

date	1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th	
code	A	B	C	D	E	F	G	H	J	K	
date	11th	12th	13th	14th	15th	16th	17th	18th	19th	20th	
code	L	M	N	P	Q	R	S	T	U	V	
date	21st	22nd	23rd	24th	25th	26th	27th	28th	29th	30th	31st
code	W	X	Y	Z	a	b	c̄	d	e	f	g

## Important Notice (1/2)

PLEASE READ THIS NOTICE BEFORE USING OUR PRODUCTS.

Please make sure that your product has been evaluated and confirmed from the aspect of the fitness for the specifications of our product when our product is mounted to your product. All the items and parameters in this product specification/datasheet/catalog have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment specified in this specification. You are requested not to use our product deviating from the condition and the environment specified in this specification.

Please note that the only warranty that we provide regarding the products is its conformance to the specifications provided herein. Accordingly, we shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this specification.

WE HEREBY DISCLAIMS ALL OTHER WARRANTIES REGARDING THE PRODUCTS, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, THAT THEY ARE DEFECT-FREE, OR AGAINST INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS.

The product shall not be used in any application listed below which requires especially high reliability for the prevention of such defect as may directly cause damage to the third party's life, body or property. You acknowledge and agree that, if you use our products in such applications, we will not be responsible for any failure to meet such requirements.

## Important Notice (2/2)

Furthermore, YOU AGREE TO INDEMNIFY AND DEFEND US AND OUR AFFILIATES AGAINST ALL CLAIMS, DAMAGES, COSTS, AND EXPENSES THAT MAY BE INCURRED, INCLUDING WITHOUT LIMITATION, ATTORNEY FEES AND COSTS, DUE TO THE USE OF OUR PRODUCTS IN SUCH APPLICATIONS.

- Aircraft equipment.
- Aerospace equipment
- Undersea equipment.
- Power plant control equipment      - Medical equipment.
- Transportation equipment (vehicles, trains, ships, elevator, etc.).
- Traffic signal equipment.
- Disaster prevention / crime prevention equipment.
- Burning / explosion control equipment
- Application of similar complexity and/ or reliability requirements to the applications listed in the above.

We expressly prohibit you from analyzing, breaking, Reverse-Engineering, remodeling altering, and reproducing our product. Our product cannot be used for the product which is prohibited from being manufactured, used, and sold by the regulations and laws in the world.

We do not warrant or represent that any license, either express or implied, is granted under any our patent right, copyright, mask work right, or our other intellectual property right relating to any combination, machine, or process in which our products or services are used. Information provided by us regarding third-party products or services does not constitute a license from us to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from us under our patents or other intellectual property.

Please do not use our products, our technical information and other data provided by us for the purpose of developing of mass-destruction weapons and the purpose of military use. Moreover, you must comply with "foreign exchange and foreign trade law", the "U.S. export administration regulations", etc.

Please note that we may discontinue the manufacture of our products, due to reasons such as end of supply of materials and/or components from our suppliers.

Customer acknowledges that Murata will, if requested by you, conduct a failure analysis for defect or alleged defect of Products only at the level required for consumer grade Products, and thus such analysis may not always be available or be in accordance with your request (for example, in cases where the defect was caused by components in Products supplied to Murata from a third party).

The product shall not be used in any other application/model than that of claimed to Murata.

Customer acknowledges that engineering samples may deviate from specifications and may contain defects due to their development status.

We reject any liability or product warranty for engineering samples.

In particular we disclaim liability for damages caused by

- the use of the engineering sample other than for evaluation purposes, particularly the installation or integration in the product to be sold by you,
- deviation or lapse in function of engineering sample,
- improper use of engineering samples.

We disclaim any liability for consequential and incidental damages.

If you can't agree the above contents, you should inquire our sales.