


## Accelerometer

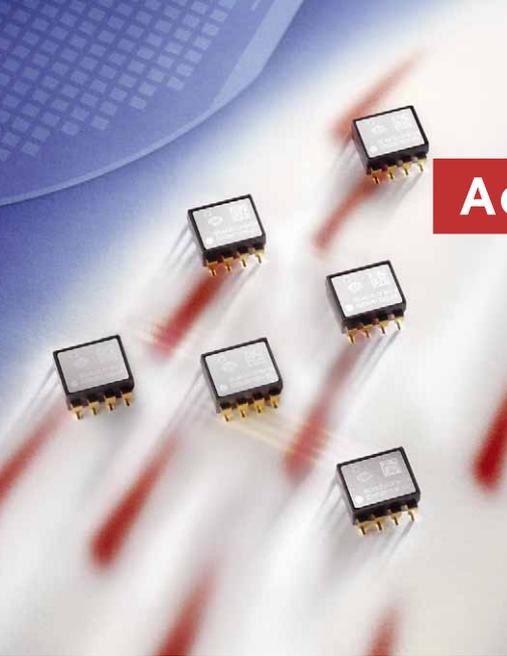

### FEATURES

- Available ranges  $\pm 1.7$  g
- 8-pin plastic surface mount DIP package mountable with pick and place machines
- Enhanced failure detection
- Digitally activated electrostatic self test
- Calibration memory parity check
- Continuous connection failure detection
- Bi-directional acceleration measurement
- Controlled frequency response in the sensing element
- Re-flow solderable, process compatible
- Single +5 V supply; ratiometric voltage output in the range 4.75 ... 5.25 V

### BENEFITS

- Exceptional reliability, unprecedented accuracy and excellent stability over temperature and time
- Outstanding overload and shock durability
- No additional components required

### APPLICATIONS

- Acceleration measurement
- Inclination measurement
- Motion measurement
- Vibration measurement

For customised product please contact VTI Technologies

### ELECTRICAL CHARACTERISTICS

Parameter	Condition	Min.	Typ.	Max.	Units
Supply voltage Vdd		4.75		5.25	V
Current consumption	Vdd = 5 V; No load		2.0	4.0	mA
Operating temperature		-40 +		125	°C
Resistive output load	Vout to Vdd or Vss	20			kOhm
Capacitive load	Vout to Vdd or Vss			20	nF
Output noise <sup>(1)</sup>	DC...80 kHz		0.25		mg

### PERFORMANCE CHARACTERISTICS

Parameter	Condition/Comment	SCA620-CF8H1A	Units
Measuring range <sup>(2)</sup>	Nominal	$\pm 1.7$	g
Measuring direction <sup>(3)</sup>		Horizontal	
Zero point (nom.) <sup>(4)</sup>	Mounting position	Vdd/2	V
Sensitivity	@ room temperature	1.2 <sup>(5)</sup>	V/g
Zero point error <sup>(6)</sup>	-40...125 °C	$\pm 125$	mg
Zero point tempco <sup>(7)</sup>	-25...85 °C	0.3 $\pm$ 0.6	mg/°C
Sensitivity error	-40...125 °C	$\pm 4$ <sup>(8)</sup>	%
Sensitivity error <sup>(7)</sup>	-25...85 °C	$\pm 3$ <sup>(8)</sup>	%
Typical non-linearity <sup>(9)</sup>	Over measuring range	$\pm 40$ <sup>(9)</sup>	mg
Cross-axis sensitivity <sup>(10)</sup>		5	%
Frequency response	-3 dB point <sup>(11)</sup>	50 $\pm$ 30	Hz
Ratiometric error <sup>(12)</sup>	Vdd = 4.75...5.25 V	2	%

**VDD = 5.00 V, UNLESS OTHERWISE SPECIFIED**

- Note 1 The noise density of CF8H1A is 20  $\mu$ g/ $\sqrt$ Hz.  
 Note 2 The measuring range is limited by sensitivity, offset and supply voltage rails of the device.  
 Note 3 Measuring direction perpendicular to the mounting plane.  
 Note 4 Vertical versions in +1 g position pins down, horizontal versions leg row 1-4 pointing downwards.  
 Note 5a Sensitivity specified as  $[V_{out}(+1g) - V_{out}(-1g)] / 2$  [V/g].  
 Note 6 Zero point error specified as  $(V_{out}(+0g) - V_{dd}/2) / V_{sens}$  [g] (room temp. error included);  $V_{sens}$  = Nominal sensitivity.  
 Note 7 Typical tolerance, not 100 % tested.  
 Note 8 Sensitivity error specified as  $\{([V_{out}(+1g) - V_{out}(-1g)] / 2) - V_{sens}\} / V_{sens} \times 100$  % [room temp. error included];  $V_{sens}$  = Nominal sensitivity.

- Note 9 Relative to straight line between  $\pm 1$  g.  
 Note 10 The cross-axis sensitivity determines how much acceleration, perpendicular to the measuring axis, couples to the output. The total cross-axis sensitivity is the geometric sum of the sensitivities of the two axes, which are perpendicular to the measuring axis.  
 Note 11 The output has true DC (0 Hz) response.  
 Note 12 Supply voltage noise also couples to the output, due to the ratiometric (output proportional to supply voltage) nature of the accelerometer.

The ratiometric error is specified as:

$$RE = 100\% \times \left[ 1 - \frac{V_{out}(@V_x) \times \frac{5.00V}{V_x}}{V_{out}(@5V)} \right]$$

### ABSOLUTE MAXIMUM RATINGS


Parameter	Value	Units
Acceleration (powered or non-powered)	20000	g
Supply voltage	-0.3 to +7.0	V
Voltage at input / output pins	-0.3 to V <sub>dd</sub> + 0.3	V
Temperature range	-55 to +125	°C

### ELECTRICAL CONNECTION

Pin#	Pin Name	Connection
1		Open or capacitively connected to GND for EMC*
2		Open or capacitively connected to GND for EMC*
3		Open or capacitively connected to GND for EMC*
4	GND	Negative supply voltage (VSS)
5		Open or capacitively connected to GND for EMC*
6	ST	Self-test control
7	VOUT	Sensor analog output
8	VDD	Positive supply voltage (VDD)

\*) recommended capacity min. 20 pF - Effectiveness should be tested and if necessary adapted in the respective connection.



### RECOMMENDED CIRCUIT

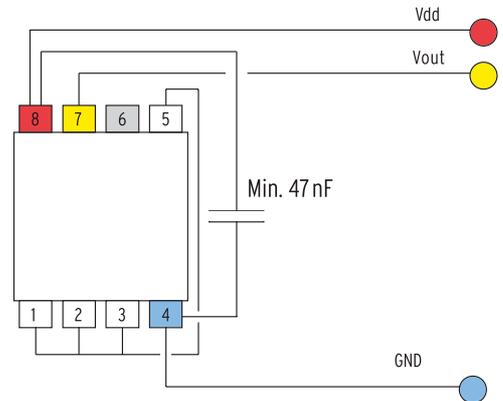


### DIMENSIONS

The accelerometer weighs under 1 g.  
The size of the part is approximately (w x h x l) 9 x 5 x 11 mm. Pin pitch is standard 100 mils.

www.DataSheet4U.com

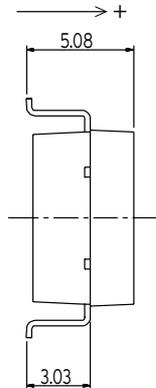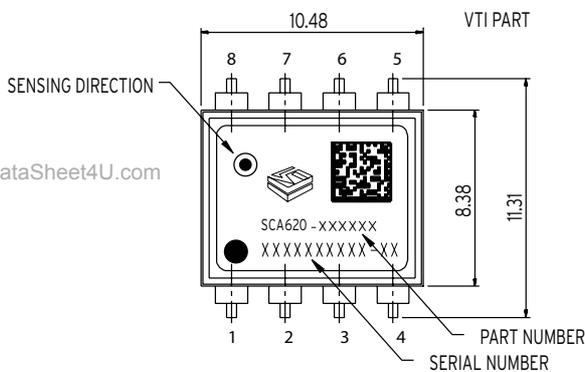

### PCB PAD LAYOUTS

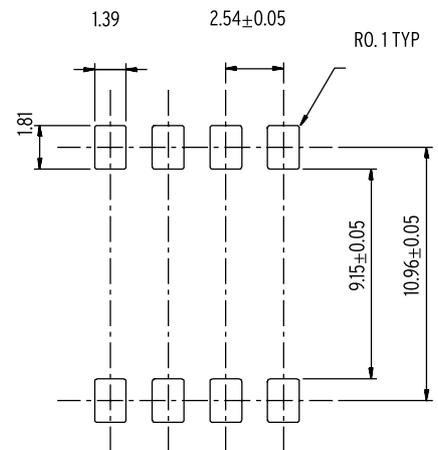

Acceleration in the direction of the arrow will increase the output voltage.