

SPECIFICATIONS FOR LCD MODULE

CUSTOMER	
MODEL	SCE096013-V01
CUSTOMER APPROVED	

APPROVED BY	CHECKED BY	ORGANIZED BY
	Lr.Yin	Wf.Luo

ADD : 2nd Floor,Block B,XinKeJu Machinery Manufacturing Co.,Ltd.No.208 MeiJingXi
Road,SongMuShan,DaLang Town,DongGuan City,China

TEL : 0769-84428017

FAX : 0769-84428017



STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	2 / 26
--------------------------	--------------------------	-----------------------	----------------------	-------------	---------------

CONTENTS

1	CONTENTS -----	2
2	RECORDS OF REVISION -----	3
3	GENERAL SPECIFICATIONS -----	4
4	FEATURES -----	4
5	MACHANICAL SPECIFICATIONS -----	4
6	OUTLINE DIMENSIONS -----	5
7	INTERFACE SPECIFICATIONS -----	6-8
8	ABSOLUTE MAXIMUM RATINGS -----	9
9	ELECTRICAL CHARACTERISTICS -----	10-12
10	FUNCTIONNAL SPECIFICATIONS -----	13-17
11	RELIABILITY -----	18
12	Outgoing Quality Control Specifications -----	19-22
13	Package Specifications -----	23
14	Precautions When Using These OEL Display Modules -----	24-26

STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	4 / 26
--------------------------	--------------------------	-----------------------	----------------------	-------------	---------------

3. GENERAL SPECIFICATIONS :

3-1 SCOPE:

This specification covers the delivery requirements for the organic light emitting diode display delivered by quality to Customer.

3-2 PRODUCTS:

Organic light emitting diode (OLED)

3-3 MODULE NAME:

SCE096013-V01-A0

4. FEATURES :

- (1) Display Color: WHITE
- (2) Dot Matrix: 64x128
- (3) Drive IC: SH1107
- (4) Viewing Angle: 160°
- (5) Aperture rate: 78%
- (6) Interface: 4-wire serial interface, I²C


5. MACHANICAL SPECIFICATIONS :

ITEM	SPECIFICATIONS UNIT	
MODULE SIZE	14.0(W)x28.0(H)x1.227(D)	mm
VIEWING AREA	11.86 (W) x 22.74(H)	mm
ACTIVE AREA	10.86 (W) x 21.74(H)	mm
DOT SIZE	0.15(W) x0.15(H)	mm
DOT PITCH	0.17(W) x0.17 (H)	mm
ASSY.TYPE	COG	---
WEIGHT	TBD	

NOTES:

OLED should be grounded during handling OLED.

6. OUTLINE DIMENSIONS





PIN	SYMBOL
1	NC
2	VPP
3	VCOMH
4	VDD
5	IM1
6	IREF
7	CS
8	RES
9	A0
10	D0
11	D1
12	VSS
13	NC

REV.	DESCRIPTION	REVISER	DATE
A0	First	luojinwei	2017-09-29

All Pages Of This Edition Approved

Signature: _____ Date: _____

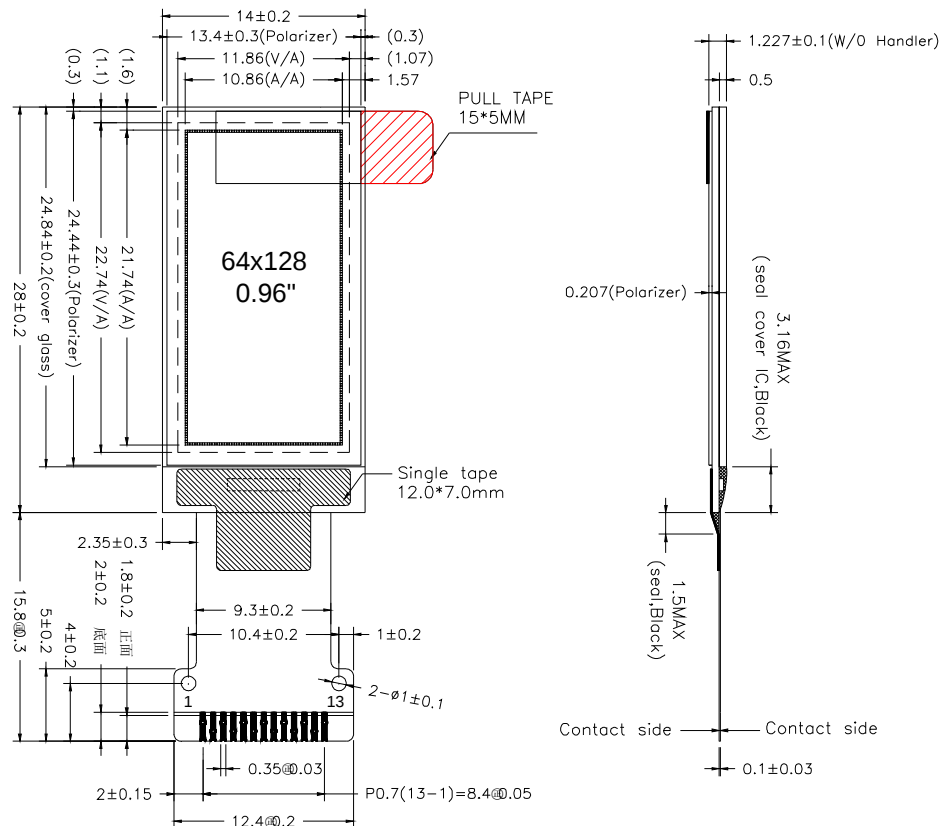

Specifications:

1. Display : OLED(White).
2. Dot Matrix: 64*128
3. Dot Size: 0.15*0.15mm
4. Dot Pitch: 0.17*0.17mm
5. Aperture Rate: 78%
6. Active Area : 10.86*21.74mm
7. Drive IC: SH1107

STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	6 / 26
------------------	------------------	---------------	---------------	------	--------

7. INTERFACE SPECIFICATIONS

7-1. PIN ASSIGNMENT


PIN NO.	SYMBOL	TYPE	FUNCTION DESCRIPTIONS						
1	NC		NC						
2	VPP	P	Power supply for OLED driving voltage. This is the most positive voltage supply pad of the chip. It should be supplied externally.						
3	VCOMH	O	This is a pad for the voltage output high level for common signals. A capacitor should be connected between this pad and VSS.						
4	VDD	P	Power pin for logic circuit. It must be connected to external source.						
5	IM1	I	Interface selection pins. <table><tr><td></td><td>IM1</td></tr><tr><td>I²C</td><td>1</td></tr><tr><td>4-wire SPI</td><td>0</td></tr></table>		IM1	I ² C	1	4-wire SPI	0
	IM1								
I ² C	1								
4-wire SPI	0								
6	IREF	I	Current reference for brightness adjustment. This is segment output current reference pin. A resistor should be connected between this pin and VSS . Set the current at 15.625 uA maximum.						
7	CS	I	Chip Select input pin. Active “L”						
8	RES	I	Hardware reset input pin. Active “L”.						
9	A0	I	This pin is Data/Command control pin. When the pin is pulled HIGH, the data at D[7:0] is data. When the pin is pulled LOW, the data at D[7:0] is command. In I2C mode, this pin acts as SA0 for slave address section.						
10	D0	I/O	When the serial interface is selected, then D0 serves as the serial clock input pad (SCL) and D1 serves as the serial data input pad (SI).						
11	D1		When the I2C interface is selected, then D0 serves as the serial clock input pad (SCL) and D1 serves as the serial data input pad (SDA).						
12	VSS	P	Ground pin. It must be connected to external ground.						
13	NC		NC						

STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	7 / 26
------------------	------------------	---------------	---------------	------	--------

7-2 APPLICATION CIRCUIT

7-2-1 4-Wire Serial Interface With Internal Charge Pump

特别提醒(Special Tips):主板设计务必加电子开关，否则，可能引起漏电流现象
(When design main board, Please add Electronic Switch circuit, otherwise, will be caused leak current)

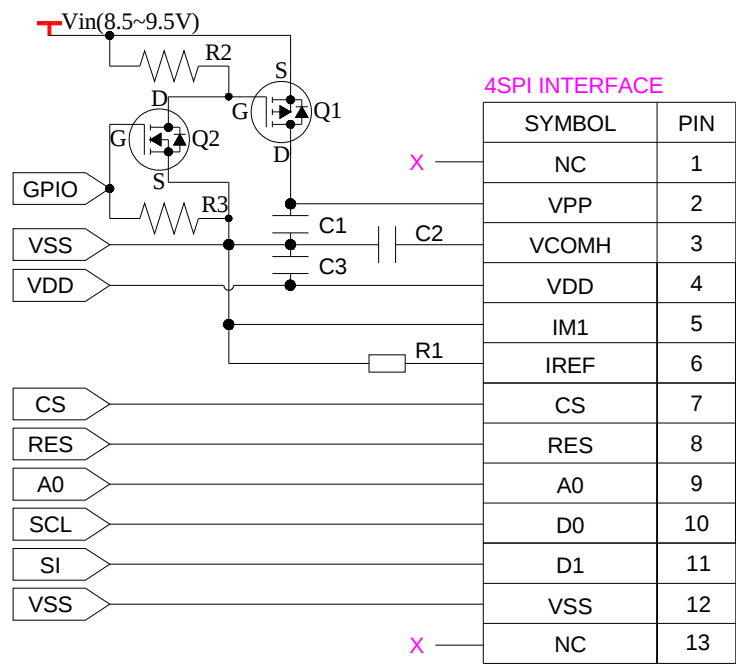

Recommended Components:

- C3: 1μF / 16V, X5R
- C1, C2: 4.7uF/25V(Tantalum type)
- R1: 560kΩ, R1 = (Voltage at IREF - VSS) / IREF
- R2, R3: 47kΩ
- Q1: FDN338P
- Q2: FDN335N

Notes:


- VDD: 1.65~3.3V, it should be equal to MPU I/O voltage.
- Vin: 8.5~9.5V

STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	8 / 26
------------------	------------------	---------------	---------------	------	--------

7-2-2 I²C Interface With Internal Charge Pump

特别提醒(Special Tips):主板设计务必加电子开关, 否则, 可能引起漏电流现象

(When design main board, Please add Electronic Switch circuit, otherwise, will be caused leak current)

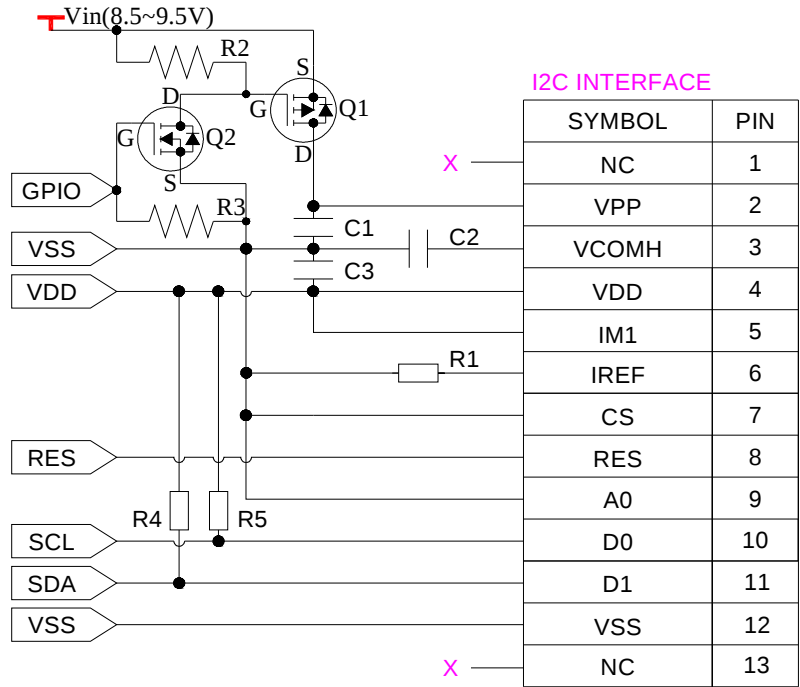

Recommended Components:

- C3: 1 μ F / 16V, X5R
- C1, C2: 4.7 μ F/25V(Tantalum type)
- R1: 560k Ω , R1 = (Voltage at IREF - VSS) / IREF
- R2, R3: 47k Ω
- R4, R5: 4.7k Ω
- Q1: FDN338P
- Q2: FDN335N

Notes:

- VDD: 1.65~3.3V, it should be equal to MPU I/O voltage.
- Vin: 8.5~9.5V

STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	9 / 26
------------------	------------------	---------------	---------------	------	--------

8. ABSOLUTE MAXIMUM RATING

Characteristic	Symbol	Standard Value			Unit	Notes
		MIN	TYP	MAX		
Power Supply Voltage(1)	V _{DD}	-0.3	-	+3.6	V	1,2
Power Supply Voltage(3)	V _{PP}	0	-	+10	V	1,2
Operating Temperature	T _{OPR}	-40	-	+70	°C	
Storage Temperature	T _{STG}	-40	-	+85	°C	3
Life Time (120 cd/m ²)		10000	-	-	hour	4
Life Time (80 cd/m ²)		30000	-	-	hour	4
Life Time (60 cd/m ²)		50000	-	-	hour	4

Note 1: All the above voltages are on the basis of “V_{SS} = 0V”.

Note 2: When this module is used beyond the above absolute maximum ratings, permanent breakage of the module may occur. Also, for normal operations, it is desirable to use this module under the conditions according to Section 9-1 “DC ELECTRICAL CHARACTERISTICS”. If this module is used beyond these conditions, malfunctioning of the module can occur and the reliability of the module may deteriorate.

Note 3: The defined temperature ranges do not include the polarizer. The maximum withstood temperature of the polarizer should be 80°C.

Note 4: V_{PP} = 9.0V, T_a = 25°C, 50% Checkerboard.

End of lifetime is specified as 50% of initial brightness reached. The average operating lifetime at room temperature is estimated by the accelerated operation at high temperature conditions.

STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	10 / 26
------------------	------------------	---------------	---------------	------	---------

9.ELECTRICAL CHARACTERISTICS

9-1 DC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Test condition	Standard Value			Unit
			MIN	TYP	MAX	
V _{DD}	Logic Supply Voltage	-	2.6	2.8	3.3	V
V _{PP}	Operating Voltage for OLED (Supplied Externally)	Internal Charge Pump Disable	8.5	9.0	9.5	V
V _{IH}	High Logic Input Level		0.8*V _{DD}	-	V _{DD}	V
V _{IL}	Low Logic Input Level		0	-	0.2*V _{DD}	V
V _{OH}	High Logic Output Level	I _{OUT} = 100μA, 3.3MHz	0.8*V _{DD}	-	V _{DD}	V
V _{OL}	Low Logic Output Level	I _{OUT} = 100μA, 3.3MHz	0	-	0.2*V _{DD}	V
I _{DD, SLEEP}	I _{DD} , Sleep Mode Current		-	-	5	uA
I _{PP, SLEEP}	I _{PP} , Sleep Mode Current		-	-	5	uA
I _{DD}	V _{DD} Supply Current		-	110	160	uA
I _{PP}	V _{PP} Supply Current (V _{PP} Supplied Externally)	V _{DD} = 2.8V, V _{CC} = 9V, 100% Display Area Turn on	-	11.0	16.0	mA

9-2 ELECTRO-OPTICAL CHARACTERISTICS


Symbol	Parameter	condition	Standard Value			Unit
			MIN	TYP	MAX	
L _{br}	Brightness (V _{PP} Supplied Externally)		120	160	-	cd/m ²
(x)	C.I.E. (White)	C.I.E. 1931	0.25	0.29	0.33	
(y)			0.27	0.31	0.35	
CR	Dark Room Contrast		-	2000:1	-	
	Viewing Angle		-	160	-	degree

* Optical measurement taken at V_{DD} = 2.8V, V_{PP} = 9V

STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	11 / 26
------------------	------------------	---------------	---------------	------	---------

9-3 AC ELECTRICAL CHARACTERISTICS

9-3-1 4 Wire Serial Interface Timing Characteristics

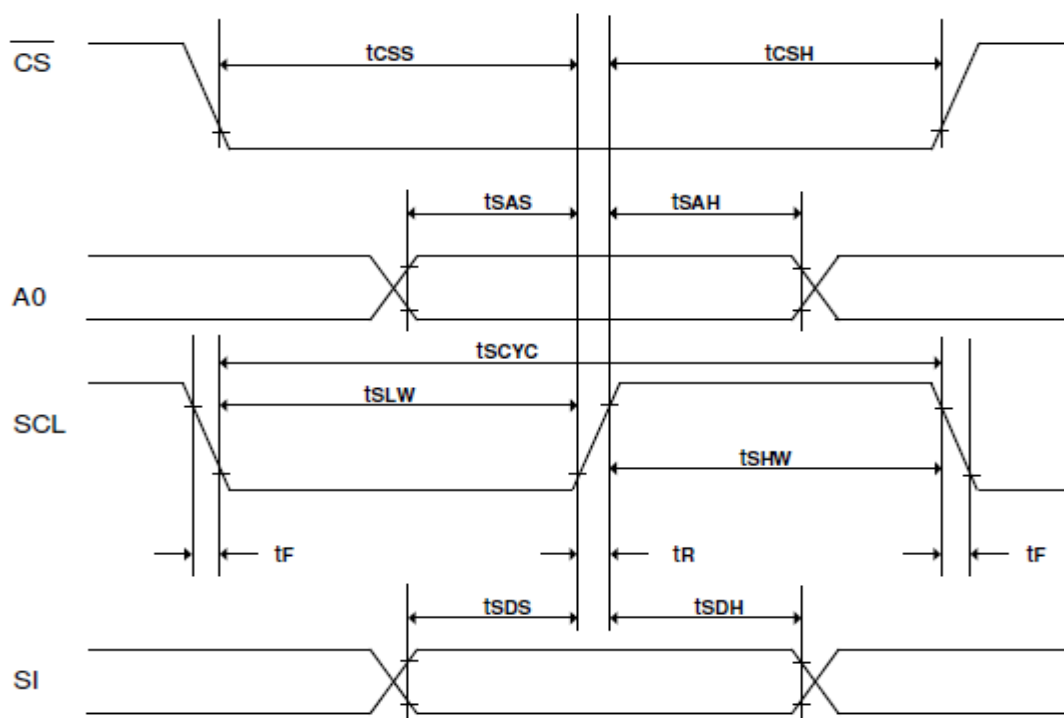


(VDD1 = 1.65 – 2.4V, TA = +25°C)

Symbol	Parameter	Min.	Typ.	Max.	Unit	Condition
tSCYC	Serial clock cycle	500	-	-	ns	
tSAS	Address setup time	300	-	-	ns	
tSAH	Address hold time	300	-	-	ns	
tSDS	Data setup time	200	-	-	ns	
tSDH	Data hold time	200	-	-	ns	
tCSS	$\overline{CS}$ setup time	240	-	-	ns	
tCSH	$\overline{CS}$ hold time time	120	-	-	ns	
tSHW	Serial clock H pulse width	200	-	-	ns	
tSLW	Serial clock L pulse width	200	-	-	ns	
tR	Rise time	-	20	30	ns	
tF	Fall time	-	20	30	ns	

(VDD1 = 2.4 - 3.5V, TA = +25°C)

Symbol	Parameter	Min.	Typ.	Max.	Unit	Condition
tSCYC	Serial clock cycle	250	-	-	ns	
tSAS	Address setup time	150	-	-	ns	
tSAH	Address hold time	150	-	-	ns	
tSDS	Data setup time	100	-	-	ns	
tSDH	Data hold time	100	-	-	ns	
tCSS	$\overline{CS}$ setup time	120	-	-	ns	
tCSH	$\overline{CS}$ hold time time	60	-	-	ns	
tSHW	Serial clock H pulse width	100	-	-	ns	
tSLW	Serial clock L pulse width	100	-	-	ns	
tR	Rise time	-	10	15	ns	
tF	Fall time	-	10	15	ns	

9-3-2 I²C Interface Timing Characteristics

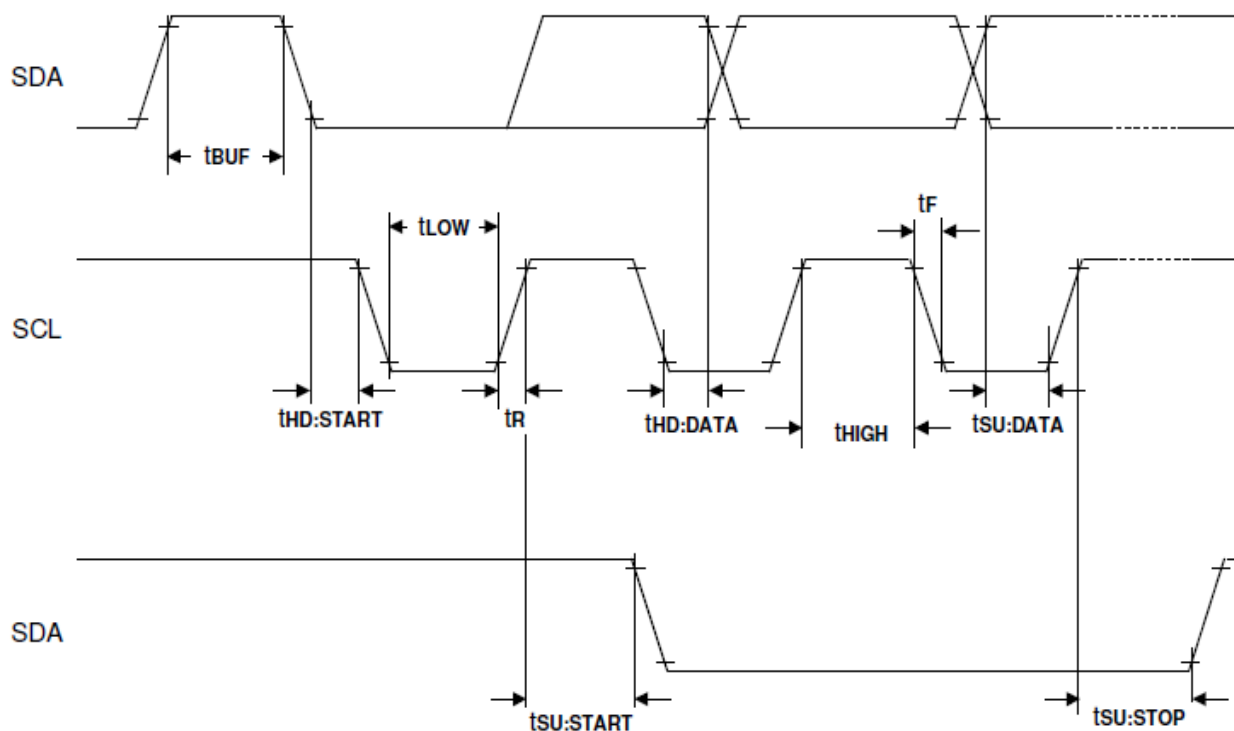

(V_{DD} = 1.65 - 3.5V, T_A = +25°C)

Symbol	Parameter	Min.	Typ.	Max.	Unit	Condition
f _{SCL}	SCL clock frequency	DC	-	400	kHz	
T _{LOW}	SCL clock Low pulse width	1.3	-	-	μs	
T _{HIGH}	SCL clock H pulse width	0.6	-	-	μs	
T _{SU:DATA}	data setup time	100	-	-	ns	
T _{HD:DATA}	data hold time	0	-	0.9	μs	
T _R	SCL to SDA rise time	20+0.1Cb	-	300	ns	
T _F	SCL to SDA fall time	20+0.1Cb	-	300	ns	
C _b	Capacity load on each bus line	-	-	400	pF	
T _{SU:START}	Setup time for re-START	0.6	-	-	μs	
T _{HD:START}	START Hold time	0.6	-	-	μs	
T _{SU:STOP}	Setup time for STOP	0.6	-	-	μs	
T _{BUF}	Bus free times between STOP and START condition	1.3	-	-	μs	

STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	13 / 26
------------------	------------------	---------------	---------------	------	---------

10. FUNCTIONAL SPECIFICATIONS

10-1 COMMANDS


Refer to the SH1107 IC Spec.

10-2 POWER UP AND POWER DOWN SEQUENCE

To protect OEL panel and extend the panel life time, the driver IC power up/down routine should include a delay period between high voltage and low voltage power sources during turn on/off. It gives the OEL panel enough time to complete the action of charge and discharge before/after the operation.


10-2-1 Power up Sequence:

1. Power up V_{DD}
2. Send Display off command
3. Initialization
4. Clear Screen
5. Power up V_{PP}
6. Delay 100ms
(When V_{PP} is stable)
7. Send Display on command

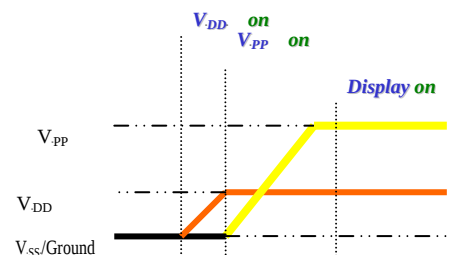

10-2-2 Power down Sequence:

1. Send Display off command
2. Power down V_{pp}
3. Delay 100ms
(When V_{CC} / V_{BAT} is reach 0 and panel is completely discharges)
4. Power down V_{DD}

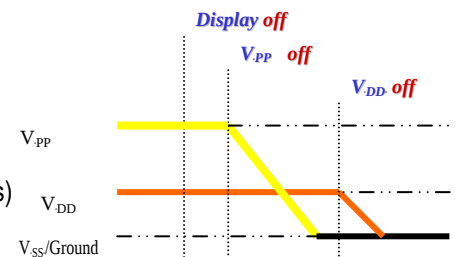

Note:

- 1) Since an ESD protection circuit is connected between V_{DD} and VBPPB inside the driver IC, V_{PP} becomes lower than V_{DD} whenever VBDDDB is ON and V_{PP} is OFF.
- 2) VPPB should be kept float (disable) when it is OFF.
- 3) Power Pins (V_{DD} , V_{pp}) can never be pulled to ground under any circumstance.
- 4) VBDDDB should not be power down before V_{pp} power down.

10-3 Reset Circuit

When RESB input is low, the chip is initialized with the following status:


1. Display is OFF
2. 128×128 Display Mode
3. Normal segment and display data column and row address mapping (SEG0 mapped to column address 00h and COM0 mapped to row address 00h)
4. Shift register data clear in serial interface
5. Display start line is set at display RAM address 0
6. Column address counter is set at 0
7. Normal scan direction of the COM outputs
8. Contrast control register is set at 80h
9. Internal DC-DC is selected

STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	14 / 26
------------------	------------------	---------------	---------------	------	---------

10-4 Actual Application Example

Command usage and explanation of an actual example . Vpp generated by externally.


<Power up Sequence>

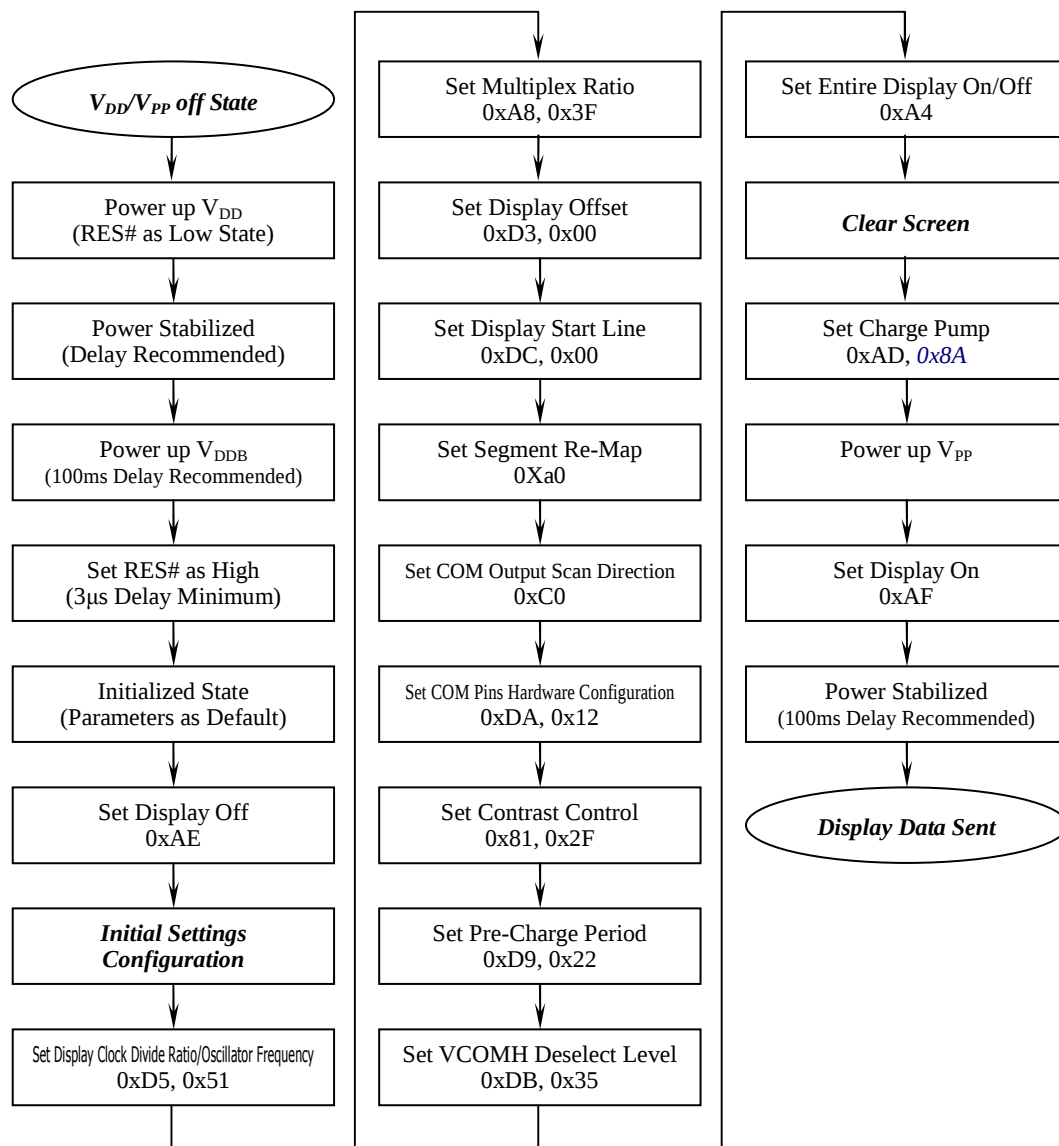


*If the noise is accidentally occurred at the displaying window during the operation, please reset the display in order to recover the display function.

STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	15 / 26
------------------	------------------	---------------	---------------	------	---------


<Power down Sequence>

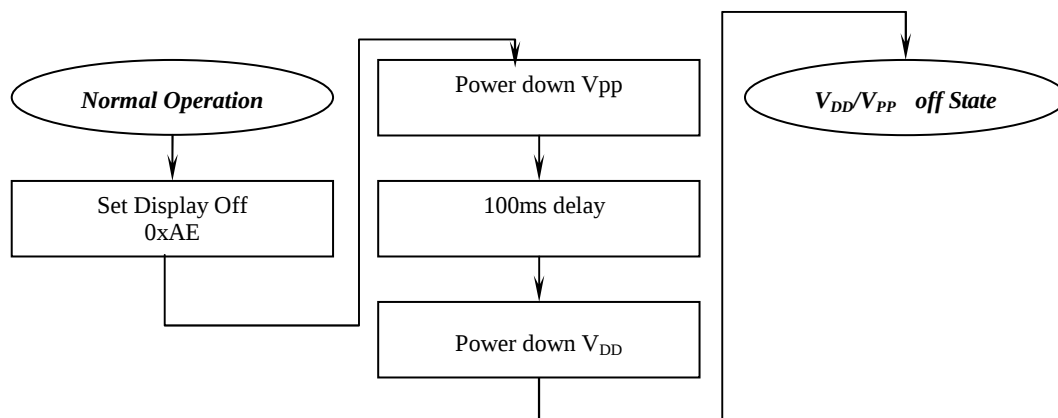

<Entering Sleep Mode>

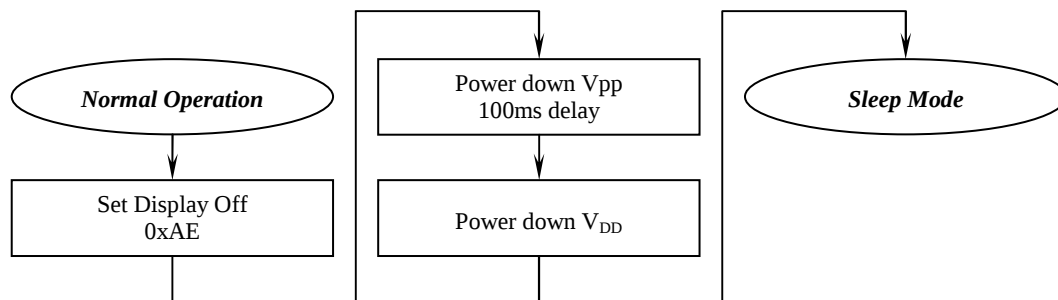

<Exiting Sleep Mode>

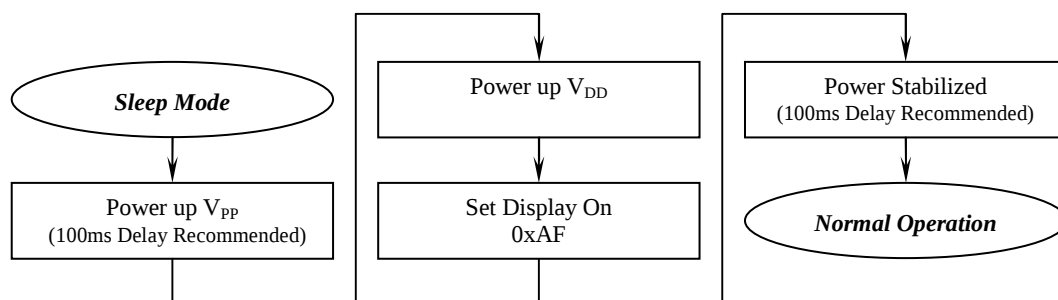

STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	16 / 26
<pre> void Init_Lcd(void) { RST=1; Delay_1ms(100); RST=0; Delay_1ms(100); RST=1; Delay_1ms(100); Write_Command(0xAE);//set display display ON/OFF,AFH/AEH Write_Command(0xDC);//set display start line Write_Command(0x00);//COM0 Write_Command(0x81);//set contrast control Write_Command(0x2F); Write_Command(0x20);//set memory addressing mode:page addressing mode Write_Command(0xA0);//set segment re-map Write_Command(0xA4);//entire display on: A4H:OFF/A5H:ON Write_Command(0xA6);//set normal/inverse display: A6H:normal/A7H:inverse Write_Command(0xA8);//set multiplex ratio Write_Command(0x3F);//1/64duty Write_Command(0xC0);//set com output scan direction Write_Command(0xD3);//set display offset Write_Command(0x60);// Write_Command(0xD5);//set display clock divide ratio/oscillator frequency Write_Command(0x51);//105Hz Write_Command(0xD9);//Dis-charge /Pre-charge Period Mode Set Write_Command(0x22);// Write_Command(0xDB);//set vcomh deselect level Write_Command(0x35);//VCOMH = $\beta 1 \times VREF = (0.430 + A [7:0] \times 0.006415) \times VREF$ Write_Command(0xAD);//DC-DC Control Mode Set </pre>					

STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	17 / 26
<pre> Write_Command(0x8A); //disable charge pump,external VPP=9.0V Write_Command(0xAF); //set display display ON/OFF,AEH/AFH } void Write_Command (Uchar Command) { int i; CS=0; A0=0; for(i=0;i<8;i++) { SCLK=0; if((Command&0x80)==0) SDA=0; else SDA=1; SCLK=1; Command=Command<<1; } CS=1; } void Write_Data (Uchar Data) { int i; CS=0; A0=1; for(i=0;i<8;i++) { SCLK=0; if((Data&0x80)==0) SDA=0; else SDA=1; SCLK=1; Data=Data<<1; } CS=1; } </pre>					

STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	18 / 26
------------------	------------------	---------------	---------------	------	---------

11. RELIABILITY

ITEM	CONDITIONS	CRITERION
OPERATING TEMPERATURE	HIGH TEMPERTURE +70℃ 240HRS	NO DEFECT IN DISPLAYING AND OPERATIONAL FUNCTION
	LOW TEMPERTURE -40℃ 240HRS	
STORAGE TEMPERATURE	HIGH TEMPERTURE +85℃ 240HRS	NO DEFECT IN DISPLAYING AND OPERATIONAL FUNCTION
	LOW TEMPERTURE - 40℃ 240HRS	
HUMIDITY	60℃ 90%RH 120HRS	NO DEFECT IN DISPLAYING AND OPERATIONAL FUNCTION
VIBRATION	- Operating Time: thirty minutes exposure for each direction (X,Y,Z) - Sweep Frequency: 10~55Hz (1 min) - Amplitude: 1.5mm	NO DEFECT IN DISPLAYING AND OPERATIONAL FUNCTION
THERMAL SHOCK	-40℃ (60mins) ←→ +85℃ (60mins), 24 cycles	NO DEFECT IN DISPLAYING AND OPERATIONAL FUNCTION

*NOTE: TEST CONDITION

(1)TEMPERATURE AND HUMIDITY: IF NO SPECIFICATION, TEMP. SET AT 25±2℃, HUMIDITY SET AT 60±5%RH

(2) OPERATING STATE: SAMPLES SUBJECT TO THE TESTS SHALL BE IN " OPERATING" CONDITION

STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	19 / 26
------------------	------------------	---------------	---------------	------	---------

12. Outgoing Quality Control Specifications

12.1 Environment Required

Customer's test & measurement are required to be conducted under the following conditions:

Temperature:	$23 \pm 5^{\circ}\text{C}$
Humidity:	$55 \pm 15\% \text{ RH}$
Fluorescent Lamp:	30W
Distance between the Panel & Lamp:	$\geq 50\text{cm}$
Distance between the Panel & Eyes of the Inspector:	$\geq 30\text{cm}$
Finger glove (or finger cover) must be worn by the inspector.	
Inspection table or jig must be anti-electrostatic.	


12.2 Sampling Plan

Level II, Normal Inspection, Single Sampling, MIL-STD-105E

12.3 Criteria & Acceptable Quality Level



Partition	AQL	Definition
Major	0.65	Defects in Pattern Check (Display On)
Minor	1.0	Defects in Cosmetic Check (Display Off)

12.3.1 Cosmetic Check (Display Off) in Non-Active Area

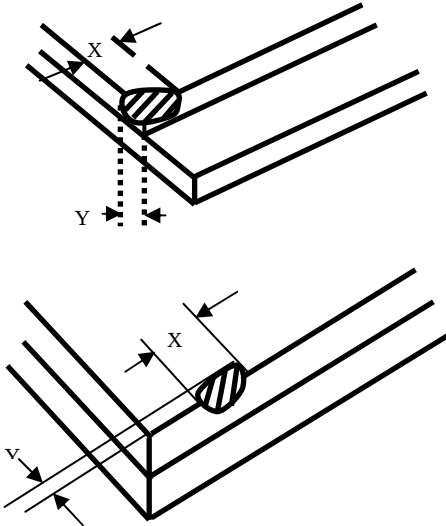Check Item	Classification	Criteria
Panel General Chipping	Minor	$X > 6 \text{ mm}$ (Along with Edge) $Y > 1 \text{ mm}$ (Perpendicular to edge) 

STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	20 / 26
------------------	------------------	---------------	---------------	------	---------


12.3.1 Cosmetic Check (Display Off) in Non-Active Area (Continued)

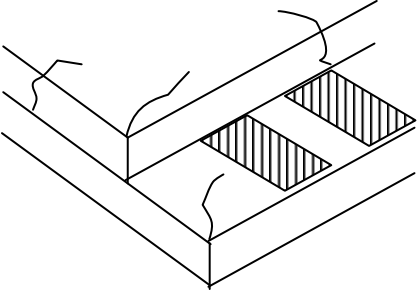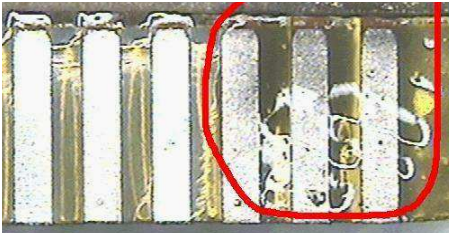Check Item	Classification	Criteria
Panel Crack	Minor	Any crack is not allowable. 
Copper Exposed (Even Pin or Film)	Minor	Not Allowable by Naked Eye Inspection
Film or Trace Damage	Minor	
Terminal Lead Prober Mark	Acceptable	
Glue or Contamination on Pin (Couldn't Be Removed by Alcohol)	Minor	
Ink Marking on Back Side of panel (Exclude on Film)	Acceptable	Ignore for Any

STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	21 / 26
------------------	------------------	---------------	---------------	------	---------



12.3.2 Cosmetic Check (Display Off) in Active Area

It is recommended to execute in clear room environment (class 10k) if actual in necessary.






Check Item	Classification	Criteria
Any Dirt & Scratch on Polarizer's Protective Film	Acceptable	Ignore for not Affect the Polarizer
Scratches, Fiber, Line-Shape Defect (On Polarizer)	Minor	$W \leq 0.1$ Ignore $W > 0.1$ $L \leq 2$ $n \leq 1$ $L > 2$ $n = 0$
Dirt, Black Spot, Foreign Material, (On Polarizer)	Minor	$\Phi \leq 0.1$ Ignore $0.1 < \Phi \leq 0.25$ $n \leq 1$ $0.25 < \Phi$ $n = 0$
Dent, Bubbles, White spot (Any Transparent Spot on Polarizer)	Minor	$\Phi \leq 0.5$ → Ignore if no Influence on Display $0.5 < \Phi$ $n = 0$ 
Fingerprint, Flow Mark (On Polarizer)	Minor	Not Allowable

* Protective film should not be tear off when cosmetic check.


** Definition of W & L & Φ (Unit: mm): $\Phi = (a + b) / 2$

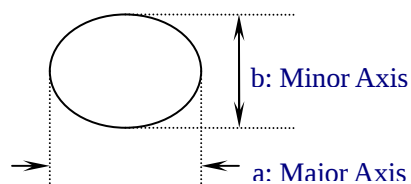

12.3.3 Pattern Check (Display On) in Active Area

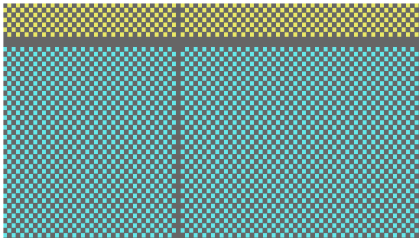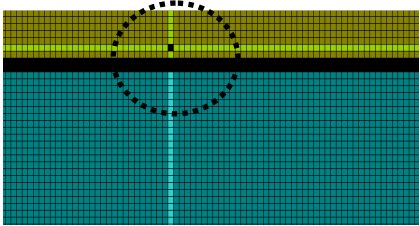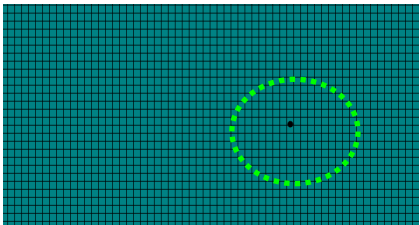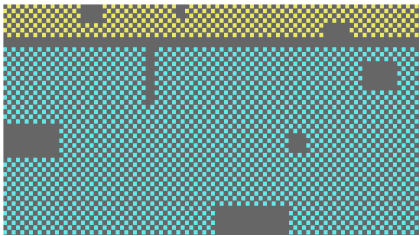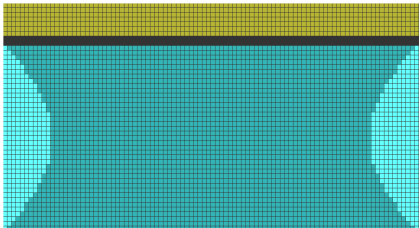STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	22 / 26
Check Item		Classification	Criteria		
No Display		Major			
Missing Line		Major			
Pixel Short		Major			
Darker Pixel		Major			
Wrong Display		Major			
Un-uniform		Major			

13. Package Specifications

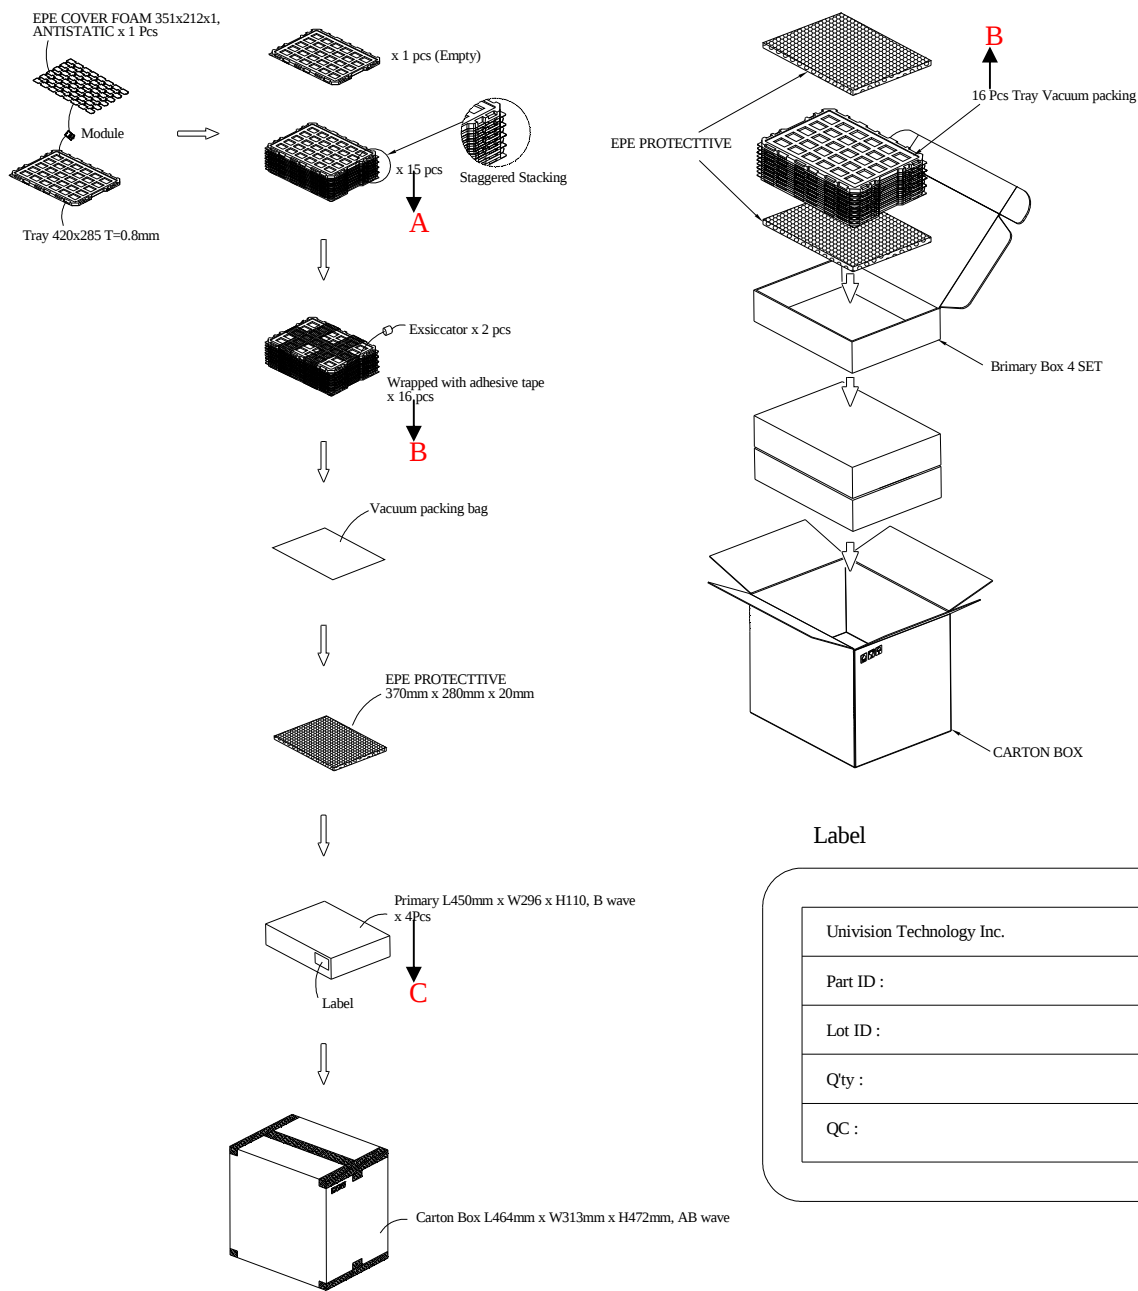

Item	Quantity	
Module	810	per Primary Box
Holding Trays (A)	15	per Primary Box
Total Trays (B)	16	per Primary Box (Including 1 Empty Tray)
Primary Box (C)	1~4	per Carton (4 as Major / Maximum)

STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	24 / 26
------------------	------------------	---------------	---------------	------	---------

14. Precautions When Using These OEL Display Modules

14.1 Handling Precautions

- 1) Since the display panel is being made of glass, do not apply mechanical impacts such as dropping from a high position.
- 2) If the display panel is broken by some accident and the internal organic substance leaks out, be careful not to inhale nor lick the organic substance.
- 3) If pressure is applied to the display surface or its neighborhood of the OEL display module, the cell structure may be damaged and be careful not to apply pressure to these sections.
- 4) The polarizer covering the surface of the OEL display module is soft and easily scratched. Please be careful when handling the OEL display module.
- 5) When the surface of the polarizer of the OEL display module has soil, clean the surface. It takes advantage of by using following adhesion tape.


* Scotch Mending Tape No. 810 or an equivalent

Never try to breathe upon the soiled surface nor wipe the surface using cloth containing solvent such as ethyl alcohol, since the surface of the polarizer will become cloudy.

Also, pay attention that the following liquid and solvent may spoil the polarizer:

- * Water
- * Ketone
- * Aromatic Solvents

- 6) Hold OEL display module very carefully when placing OEL display module into the system housing. Do not apply excessive stress or pressure to OEL display module. And, do not over bend the film with electrode pattern layouts. These stresses will influence the display performance. Also, secure sufficient rigidity for the outer cases.

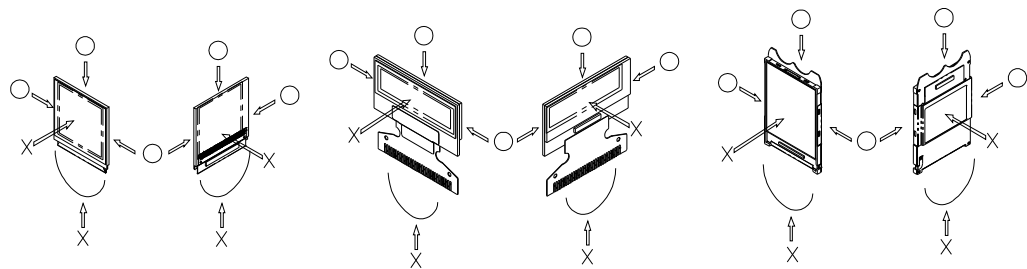

- 7) Do not apply stress to the driver IC and the surrounding molded sections.
- 8) Do not disassemble nor modify the OEL display module.
- 9) Do not apply input signals while the logic power is off.
- 10) Pay sufficient attention to the working environments when handling OEL display modules to prevent occurrence of element breakage accidents by static electricity.
 - * Be sure to make human body grounding when handling OEL display modules.
 - * Be sure to ground tools to use or assembly such as soldering irons.
 - * To suppress generation of static electricity, avoid carrying out assembly work under dry environments.
 - * Protective film is being applied to the surface of the display panel of the OEL display module. Be careful since static electricity may be generated when exfoliating the protective film.
- 11) Protection film is being applied to the surface of the display panel and removes the protection film before assembling it. At this time, if the OEL display module has been stored for a long period of time, residue

STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	25 / 26
adhesive material of the protection film may remain on the surface of the display panel after removed of the film. In such case, remove the residue material by the method introduced in the above Section 5). 12) If electric current is applied when the OEL display module is being dewed or when it is placed under high humidity environments, the electrodes may be corroded and be careful to avoid the above. 14.2 Storage Precautions 1) When storing OEL display modules, put them in static electricity preventive bags avoiding exposure to direct sun light nor to lights of fluorescent lamps. and, also, avoiding high temperature and high humidity environment or low temperature (less than 0°C) environments. (We recommend you to store these modules in the packaged state when they were shipped from Allvision technology Inc.) At that time, be careful not to let water drops adhere to the packages or bags nor let dewing occur with them. 2) If electric current is applied when water drops are adhering to the surface of the OEL display module, when the OEL display module is being dewed or when it is placed under high humidity environments, the electrodes may be corroded and be careful about the above. 14.3 Designing Precautions 1) The absolute maximum ratings are the ratings which cannot be exceeded for OEL display module, and if these values are exceeded, panel damage may be happen. 2) To prevent occurrence of malfunctioning by noise, pay attention to satisfy the V_{IL} and V_{IH} specifications and, at the same time, to make the signal line cable as short as possible. 3) We recommend you to install excess current preventive unit (fuses, etc.) to the power circuit (V_{DD}). (Recommend value: 0.5A) 4) Pay sufficient attention to avoid occurrence of mutual noise interference with the neighboring devices. 5) As for EMI, take necessary measures on the equipment side basically. 6) When fastening the OEL display module, fasten the external plastic housing section. 7) If power supply to the OEL display module is forcibly shut down by such errors as taking out the main battery while the OEL display panel is in operation, we cannot guarantee the quality of this OEL display module. 8) The electric potential to be connected to the rear face of the IC chip should be as follows: SSD1315 * Connection (contact) to any other potential than the above may lead to rupture of the IC. 14.4 Precautions when disposing of the OEL display modules 1) Request the qualified companies to handle industrial wastes when disposing of the OEL display modules. Or, when burning them, be sure to observe the environmental and hygienic laws and regulations. 14.5 Other Precautions 1) When an OEL display module is operated for a long of time with fixed pattern may remain as an after image or slight contrast deviation may occur. Nonetheless, if the operation is interrupted and left unused for a while, normal state can be restored. Also, there will be no problem in the reliability of the module. 2) To protect OEL display modules from performance drops by static electricity rapture, etc., do not touch the following sections whenever possible while handling the OEL display modules. * Pins and electrodes * Pattern layouts such as the FPC 3) With this OEL display module, the OEL driver is being exposed. Generally speaking, semiconductor elements					

STANDARD DOC.	PRODUCT SPEC.	MODULE NO.	SCE096013-V01	PAGE	26 / 26
change their characteristics when light is radiated according to the principle of the solar battery. Consequently, if this OEL driver is exposed to light, malfunctioning may occur. * Design the product and installation method so that the OEL driver may be shielded from light in actual usage. * Design the product and installation method so that the OEL driver may be shielded from light during the inspection processes. 4) Although this OEL display module stores the operation state data by the commands and the indication data, when excessive external noise, etc. enters into the module, the internal status may be changed. It therefore is necessary to take appropriate measures to suppress noise generation or to protect from influences of noise on the system design. 5) We recommend you to construct its software to make periodical refreshment of the operation statuses (re-setting of the commands and re-transference of the display data) to cope with catastrophic noise. Warranty: The warranty period shall last twelve (12) months from the date of delivery. Buyer shall be completed to assemble all the processes within the effective twelve (12) months. Allvision technology Inc. shall be liable for replacing any products which contain defective material or process which do not conform to the product specification, applicable drawings and specifications during the warranty period. All products must be preserved, handled and appearance to permit efficient handling during warranty period. The warranty coverage would be exclusive while the returned goods are out of the terms above. Notice: No part of this material may be reproduces or duplicated in any form or by any means without the written permission of Allvision technology Inc. Allvision technology Inc. reserves the right to make changes to this material without notice. Allvision technology Inc. does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as, medical products. Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party. This material or portions thereof may contain technology or the subject relating to strategic products under the control of Foreign Exchange and Foreign Trade Law of Taiwan and may require an export license from the Ministry of International Trade and Industry or other approval from another government agency.					