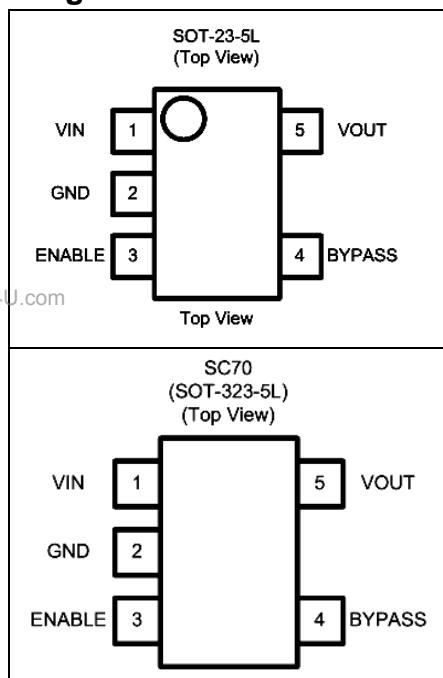


Description

The SE5508 series of fixed output low dropout linear regulators are designed for portable battery powered applications, which require low noise environment, fast enable response time, and low dropout voltage. An optional bypass capacitor can be added for better low-noise performance. Each device contains a voltage reference unit, an error amplifier, a PMOS power transistor, and resistors for setting output voltage, and current limit and temperature limit protection circuits.

The SE5508 has been designed to be used with low cost capacitors and requires a minimum output capacitor of $1.0\mu F$. Standard voltage versions are 1.5, 1.8, 2.5, 2.8, 3.0, and 3.3V.

Pin Configuration


www.DataSheet4U.com

Features


- Excellent Noise Rejection at 62 dB.
- Typical Low Dropout Voltage of 200mV at 75mA.
- Fast Enable Turn-On Time of 20 μs (Typ.)
- Excellent Line and Load Regulation.
- High Accuracy Output Voltage of 2%.
- Typical Low Ground Current at 50 μA
- Typical Disable Current Less than 0.1 μA
- Thermal Protection.
- Standard SOT23-5L and SC70 (SOT353) Package.
- Available in Lead-Free Packages.

Applications

- Cellphones.
- Wireless LAN's.
- Hand-Held Instrumentation.
- Portable Video Game Devices.
- Digital Cameras.

Ordering Information

SE5508

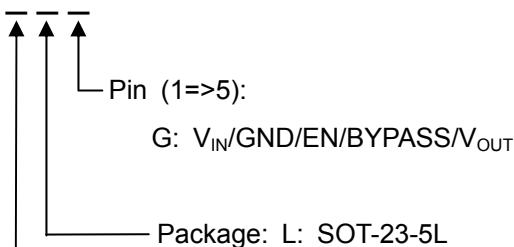
 G: $V_{IN}/GND/EN/BYPASS/V_{OUT}$

Package: L: SOT-23-5L

P: SC70 (SOT353)

 Output Voltage: A: $V_{OUT} = 3.3V$

 B: $V_{OUT} = 2.8V$

 C: $V_{OUT} = 2.5V$

 D: $V_{OUT} = 1.8V$

 E: $V_{OUT} = 1.5V$

 F: $V_{OUT} = 3.0V$



**SEAWARD
ELECTRONICS**

**150mA CMOS Low Noise
LDO Voltage Regulator
(Preliminary)**

www.DataSheet4U.com

SE5508

Absolute Maximum Rating⁽¹⁾

Parameter	Symbol	Value	Units
Input Voltage	V _{IN}	6	V
Enable Voltage	V _{EN}	-0.3 to V _{IN}	V
Output Voltage	V _{OUT}	-0.3 to V _{IN}	V
Power Dissipation	P _D	Internally Limited ⁽³⁾	
Output Short Circuit Duration		Infinite	
Thermal Resistance, Junction-to-Ambient	Θ _{JA}	230	°C/W
Lead Temperature (Soldering, 5 sec.)		260	°C
Junction Temperature	T _J	0 to +150	°C
Storage Temperature	T _S	-40 to +150	°C

Operating Rating⁽²⁾

Parameter	Symbol	Value	Units
Supply Input Voltage	V _{IN}	+2.0V to +5.5	V
Junction Temperature	T _J	0 to +125	°C

Electrical Characteristics

V_{IN} = 5V; C_{IN} = 2.2μF; C_{OUT} = 2.21μF; I_{OUT} = 10mA; T_J = 25°C; unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V _{OUT}	Output Voltage Accuracy	SE5508 – 1.5	1.470	1.5	1.530	V
		SE5508 – 1.8	1.764	1.8	1.836	V
		SE5508 – 2.5	2.450	2.5	2.550	V
		SE5508 – 2.8	2.744	2.8	2.856	V
		SE5508 – 3.0	2.940	3.0	3.060	V
		SE5508 – 3.3	3.234	3.3	3.366	V
ΔV _{OUT}	Line Regulation	V _{IN} = V _{OUT} + 1V to 6V, I _{OUT} = 10mA (V _{OUT} = 3.3V)	--	1	--	%/V
ΔV _{OUT}	Load Regulation ⁽⁵⁾	V _{IN} = 5V; I _{OUT} = 10mA to 150mA (V _{OUT} = 3.3V)	--	1	--	%
ΔV _{OUT} /ΔT	Output Voltage Temperature Coefficient	Note 4	--	0.033	--	mV/°C



**SEAWARD
ELECTRONICS**

**150mA CMOS Low Noise
LDO Voltage Regulator
(Preliminary)**

www.DataSheet4U.com

SE5508

Electrical Characteristics (Continued)

$V_{IN} = 5V$; $C_{IN} = 2.2\mu F$; $C_{OUT} = 2.2\mu F$; $I_{OUT} = 10mA$; $T_J = 25^\circ C$; unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{IN} - V_{OUT}$	Dropout Voltage ⁽⁶⁾	$I_{OUT} = 10mA$	--	20	--	mV
		$I_{OUT} = 75mA$	--	200	--	
		$I_{OUT} = 150mA$	--	500	--	
$T_{PROTECTION}$	Thermal Protection	Thermal Protection Temperature	--	150	--	°C
		Protection Hysterisys	--	20	--	
PSRR	Ripple Rejection	$f = 120$ Hz	--	62	--	dB
I_Q	Quiescent Current	$V_{EN} = 0V$ $(V_{OUT} = 1.5V)$	--	0.1	--	μA
		$V_{EN} = V_{TH(EN)}$; $I_{OUT} = 10mA$ $(V_{OUT} = 1.5V)$	--	50	--	
$V_{TH(EN)}$	Enable Input Threshold Voltage	Voltage Increasing, Output Turns On, Logic High	1.6	--	--	V
		Voltage Decreasing, Output Turns Off, Logic Low	--	--	0.4	
I_{LIMIT}	Current Limit		300	--	--	mA

Note 1: Exceeding the absolute maximum rating may damage the device.

Note 2: The device is not guaranteed to function outside its operating rating.

Note 3: The maximum allowable power dissipation at any T_A (ambient temperature) is calculated using: $P_{D(MAX)} =$

$(T_{J(MAX)} - T_A)/\Theta_{JA}$. Exceeding the maximum allowable power dissipation will result in excessive die temperature, and the regulator will go into thermal shutdown. See "Thermal Consideration" section for details

Note 4: Output voltage temperature coefficient is the worst case voltage change divided by the total temperature range.

www.DataSheet4U.com

Note 5: Regulation is measured at constant junction temperature using low duty cycle pulse testing. Parts are tested for load regulation in the load range from 0.1mA to 150mA. Changes in output voltage due to heating effects are covered by the thermal regulation specification.

Note 6: Dropout voltage is defined as the input to output differential at which the output voltage drops 2% below its nominal value measured at 1V differential.



SEAWARD
ELECTRONICS


150mA CMOS Low Noise
LDO Voltage Regulator
(Preliminary)

www.DataSheet4U.com

SE5508


Line Regulation (VOUT = 3.3V)

(VIN = 4.3V to 5V, IOUT = 10mA)

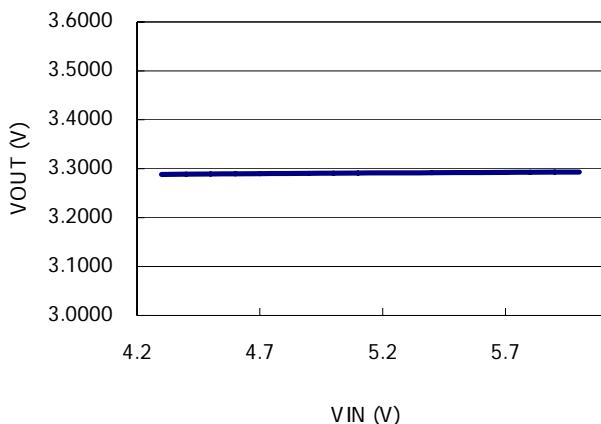


Load Regulation (VOUT = 3.3V)

(VIN = 5V, IOUT = 10mA to 150mA)

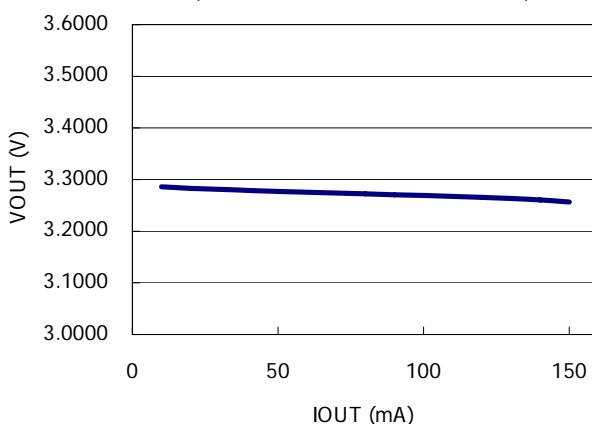

Output Voltage vs Temperature


(VIN = 3.3V, IOUT = 10mA)

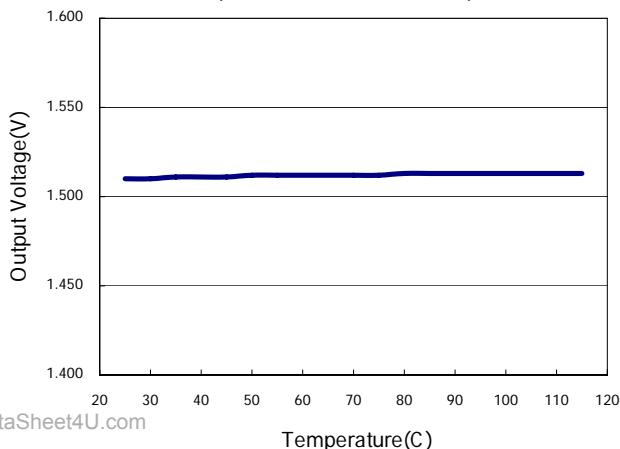

www.DataSheet4U.com

PSRR (VOUT = 3.3V)


(VIN = 5V, VPP = 1V)

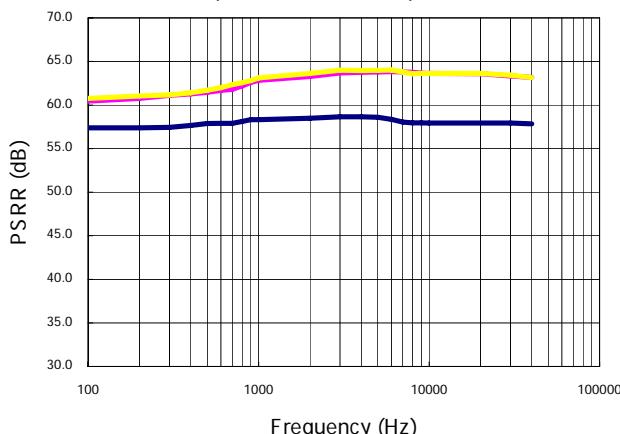

— CBY = 10uF — CBY = 22uF — CBY = 0.1uF


IQ vs IOUT (VOUT = 1.5V)

(VIN = 3.3V, IOUT = 10mA to 150mA)

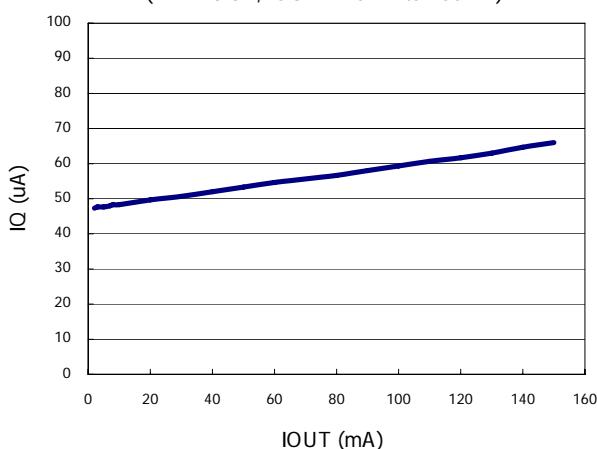

Transient Response (VOUT = 3.3V)

(IOUT = 1mA to 40mA)

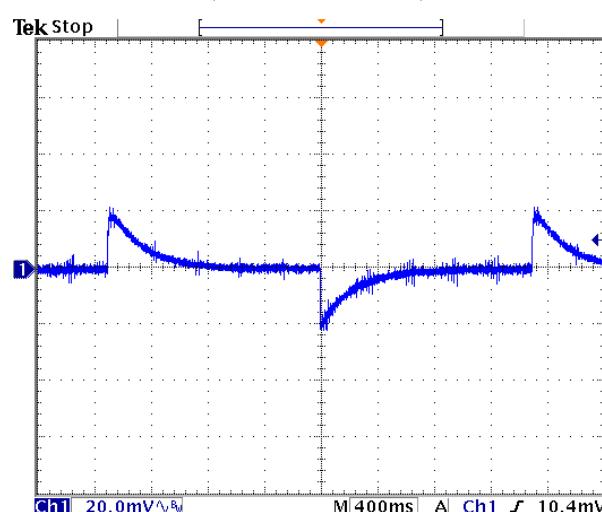

Application Hints

Like any low dropout regulator, SE5508 requires external capacitors to ensure stability. The external capacitors must be carefully selected to ensure performance.


Input Capacitor

An input capacitor of at least $1\mu\text{F}$ is required. Ceramic or Tantalum can be used. The value can be increase without upper limit.

Output Capacitor

An output capacitor is required for stability. It must be placed no more than 1 cm away from the V_{OUT} pin, and connected directly between V_{OUT} and GND pins. The minimum value is $1\mu\text{F}$ but may be increase without limit.

Application Diagram

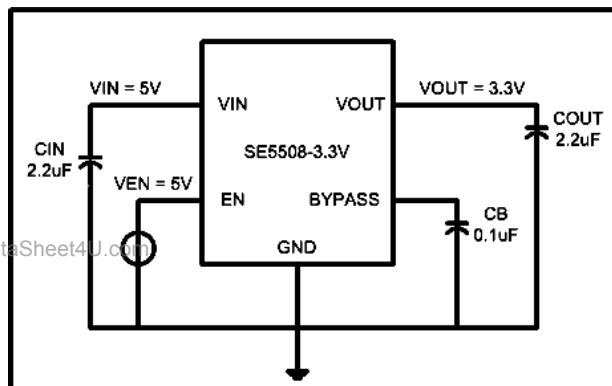
www.DataSheet4U.com

Thermal Considerations


It is important that the thermal limit of the package is not exceeded. The SE5508 has built-in thermal protection. When the thermal limit is exceeded, the IC will enter protection, and V_{OUT} will be pulled to ground. The power dissipation for a given application can be calculated as following:

The power dissipation (P_D) is

$$P_D = I_{OUT} * [V_{IN} - V_{OUT}]$$

The thermal limit of the package is then limited to $P_{D(MAX)} = [T_J - T_A]/\Theta_{JA}$ where T_J is the junction temperature, T_A is the ambient temperature, and Θ_{JA} is around $230^\circ\text{C}/\text{W}$ for SE5508. SE5508 is designed to enter thermal protection at 150°C . For example, if T_A is 25°C then the maximum P_D is limited to about 0.6W . In other words, if $I_{OUT(MAX)} = 150\text{mA}$, then $[V_{IN} - V_{OUT}]$ cannot exceed 3.6V .

Block Diagram

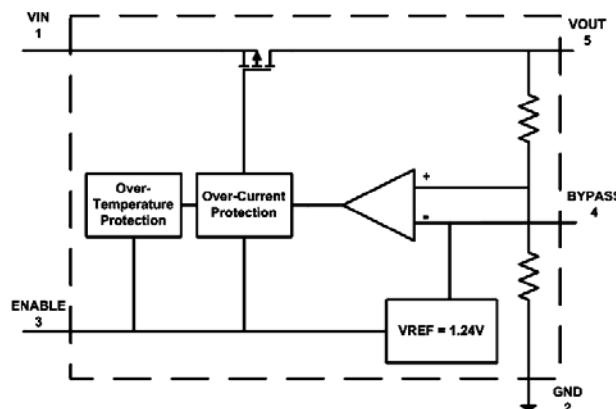




SEAWARD
ELECTRONICS

150mA CMOS Low Noise
LDO Voltage Regulator
(Preliminary)

www.DataSheet4U.com


SE5508

OUTLINE DRAWING SOT-23-5L

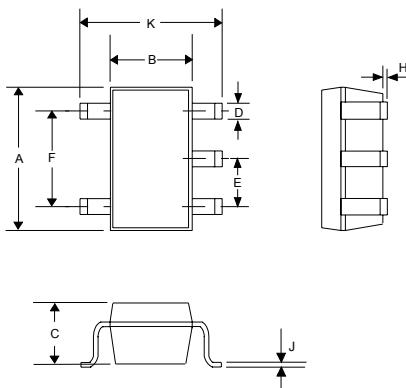

DIM ^N	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.110	0.120	2.80	3.05
B	0.059	0.070	1.50	1.75
C	0.036	0.051	0.90	1.30
D	0.014	0.020	0.35	0.50
E	-	0.037	-	0.95
F	-	0.075	-	1.90
H	-	0.006	-	0.15
J	0.0035	0.008	0.090	0.20
K	0.102	0.118	2.60	3.00

OUTLINE DRAWING SC70 (SOT353)

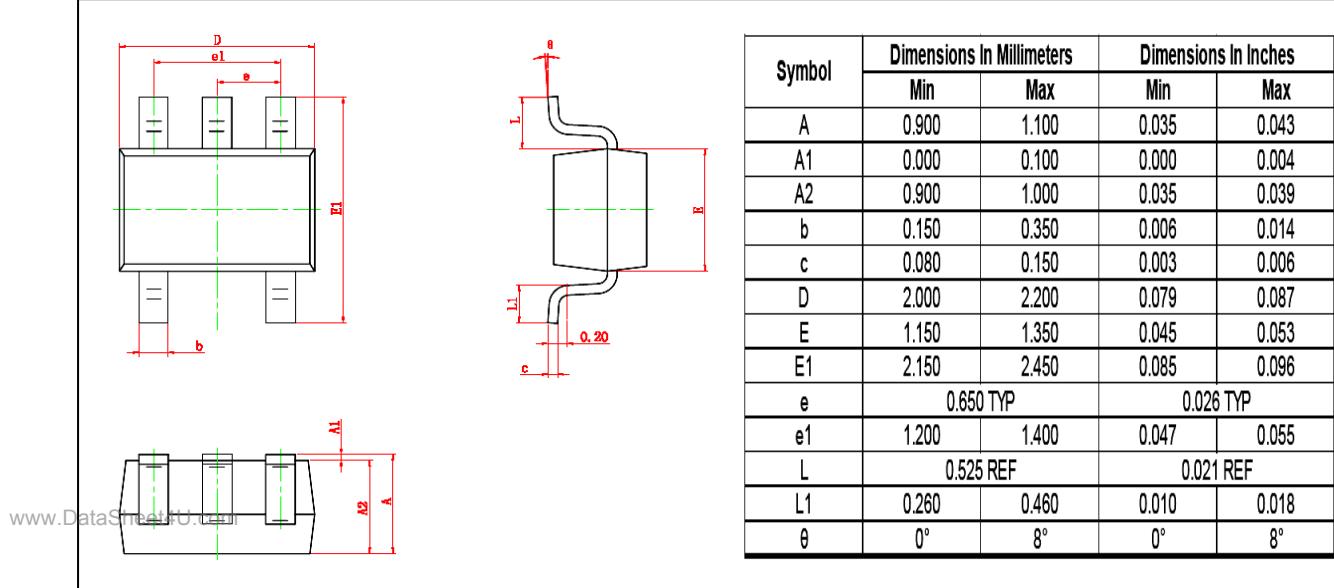



SEAWARD
ELECTRONICS

**150mA CMOS Low Noise
LDO Voltage Regulator
(Preliminary)**

www.DataSheet4U.com

SE5508

Customer Support

Seaward Electronics Incorporated – China

Section B, 2nd Floor, ShangDi Scientific Office Complex, #22 XinXi Road

Haidian District, Beijing 100085, China

Tel: 86-10-8289-5700/01/05

Fax: 86-10-8289-5706

Seaward Electronics Corporation – Taiwan

2F, #181, Sec. 3, Minquan East Rd,

Taipei, Taiwan R.O.C

Tel: 886-2-2712-0307

Fax: 886-2-2712-0191

Seaward Electronics Incorporated – North America

1512 Centre Pointe Dr.

Milpitas, CA95035, USA

Tel: 1-408-821-6600

Last Updated - 12/5/2008