

## SI-8000TFE Series Full-Mold, Separate Excitation Step-down Switching Mode

### ■Features

- Compact full-mold package (equivalent to TO220)
- Output current: 1.5 A
- High efficiency: 81% typ. (at  $V_o = 5$  V)
- Requires only 4 discrete components
- Built-in reference oscillator (300 kHz)
- Built-in dropping-type-overcurrent and thermal protection circuits
- Output ON/OFF available (circuit current at output OFF:  $200\mu A$  typ.)
- Soft start available by ON/OFF pin

### ■Applications

- Onboard local power supplies
- AV equipment
- OA equipment

### ■Lineup

Part Number	SI-8008TFE	SI-8050TFE
$V_o$ (V)	Variable (0.8 to 24)	5
$I_o$ (A)		1.5

### ■Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit	Conditions
DC Input Voltage	$V_{IN}$	43	V	W
	$P_{D1-1}$	17.8 (with infinite heatsink)		
	$P_{D1-2}$	14.2 (with infinite heatsink)		
Power Dissipation	$P_{D2-1}$	2.15 (without heat sink, standalone operation)		
	$P_{D2-2}$	1.72 (without heatsink, standalone operation)		
Junction Temperature*	$T_j$	-30 to +150	°C	
Storage Temperature	$T_{STG}$	-40 to +150	°C	
Thermal Resistance (Junction to Case)	$\theta_{j-c}$	7	°C/W	
Thermal Resistance (Junction to Ambient Air)	$\theta_{j-a}$	58	°C/W	

\*: This product has built-in thermal protection circuits that may operate when the junction temperature rises above 130°C.  
The recommended design for the junction temperature during operation is below 125°C.

### ■Recommended Operating Conditions

Parameter	Symbol	Ratings			Unit
		SI-8008TFE	SI-8050TFE		
Input Voltage Range	$V_{IN}$	$V_{O+3}^1$ to 40	8 to 40		V
Output Voltage Range	$V_o$	0.8 to 24	5.0		V
Output Current Range	$I_o$		0 to 1.5		A
Operating Junction Temperature Range	$T_{JOP}$		-20 to +125		°C
Operating Temperature Range	$T_{OP}$		-20 to +85		°C


\*1: The minimum value of an input voltage range is the higher of 4.5 V or  $V_o + 3$  V.

### ■Electrical Characteristics

( $T_a=25^\circ C$ )


Parameter	Symbol	Ratings			Unit	
		SI-8008TFE				
		min.	typ.	max.		
Output Voltage (Reference Voltage)	$V_o$ ( $V_{ADJ}$ )	4.90	5.00	5.10	V	
		0.784	0.800	0.816		
		$V_{IN}=15V, I_o=0.1A$				
Temperature Coefficient of Output Voltage (Temperature Coefficient of Reference Voltage)	$\Delta V_o/\Delta T$ ( $\Delta V_{REF}/\Delta T$ )				mV/°C	
		±0.1				
		$V_{IN}=15V, I_o=0.1A, T_c=0$ to $100^\circ C$				
Efficiency	$\eta$	81		81	%	
		$V_{IN}=15V, I_o=0.5A$				
Oscillation Frequency	$f_o$	300		300	kHz	
		$V_{IN}=15V, I_o=0.5A$				
Line Regulation	$\Delta V_{OLINE}$	60	80	60	mV	
		$V_{IN}=10$ to 30V, $I_o=0.5A$				
Load Regulation	$\Delta V_{LOAD}$	10	40	10	mV	
		$V_{IN}=15V, I_o=0.2$ to 1.5A				
Overcurrent Protection Starting Current	$I_s$	1.6		1.6	A	
		$V_{IN}=15V$				
ON/OFF Pin* Outflow Current at Low Voltage	Low Level Voltage		0.5		V	
		10	40	10		
		$V_{SSL}=0V$				
Quiescent Circuit Current	$I_q$	6		6	mA	
		$V_{IN}=15V, I_o=0A$				
	$I_{q(OFF)}$	200	400	200	$\mu A$	
		$V_{IN}=15V, V_{SS}=0V$				

\*: Pin 5 is the SS pin. Soft start at power on can be performed with a capacitor connected to this pin. The output can also be turned ON/OFF with this pin. The output is stopped by setting the voltage of this pin to  $V_{SSL}$  or lower. SS-pin voltage can be changed with an open-collector drive circuit of a transistor. When using both the soft-start and ON/OFF functions together, the discharge current from  $C_3$  flows into the ON/OFF control transistor. Therefore, limit the current securely to protect the transistor if  $C_3$  capacitance is large. The SS pin is pulled up to the power supply in the IC, so applying the external voltage is prohibited. If the pin is not used, leave it open.

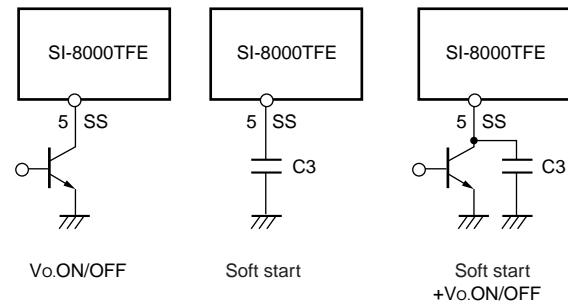


## ■External Dimensions (TO220F-5)

(Unit : mm)

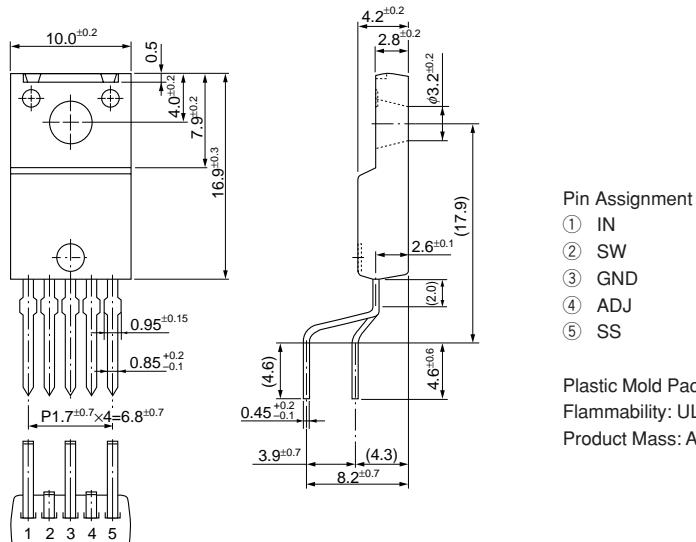

## ■Block Diagram

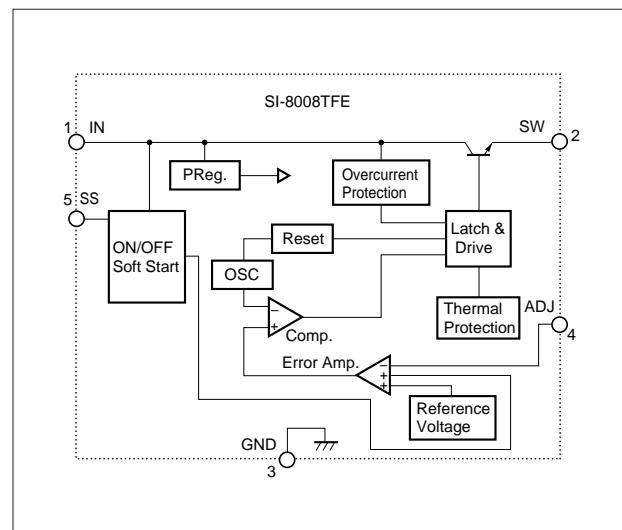

## ■Typical Connection Diagram

