



$$I_{PN} = 40...1500A \quad V_{OUT} = \pm 4 V$$

### Features

- ◆ Hall effect measuring principle
- ◆ Galvanic isolation between primary and secondary circuit
- ◆ Isolation voltage 3000 V
- ◆ Low power consumption
- ◆ Extended measuring range (3 \*IPN)
- ◆ Insulated plastic case recognized according to UL 94-V0

### Advantages

- ◆ Easy installation
- ◆ Small size and space saving
- ◆ Only one design for wide current ratings range
- ◆ High immunity to external interference

### Industrial applications

- ◆ DC motor drives
- ◆ Switched Mode Power Supplies(SMPS)
- ◆ AC variable speed drives
- ◆ Uninterruptible Power Supplies(UPS)
- ◆ Battery supplied applications
- ◆ Power supplies for welding applications

### TYPES OF PRODUCTS

Type	Primary nominal current r. m. s $I_{PN}$ (A)	Primary current measuring range $I_P$ (A)
SIOY3S400V2	400	$\pm 1200$
SIOY3S500V2	500	$\pm 1500$
SIOY3S600V2	600	$\pm 1800$
SIOY3S800V2	800	$\pm 2400$
SIOY3S1000V2	1000	$\pm 2500$
SIOY3S1200V2	1200	$\pm 2500$
SIOY3S1500V2	1500	$\pm 2500$

### General Description

For the electronic measurement of currents : DC, AC, pulsed, mixed, with a galvanic isolation between the primary circuit and the secondary circuit.


## Parameters Table

PARAMETERS	SYMBOL	UNIT	VALUE	CONDITIONS
<b>Electrical data</b>				
Supply voltage( $\pm 5\%$ ) <sup>(1)</sup>	$V_C$	V	$\pm 15$	
Current consumption	$I_C$	mA	$\pm 15$	
Output voltage	$V_{out}$	V	$\pm 4V$	@ $\pm I_{PN}$ , $R_L = 10\text{ k}\Omega$ , $T_A = 25^\circ\text{C}$
Isolation resistance	$R_{IS}$	$M\Omega$	$>1000$	@ 500 VDC
Output internal resistance	$R_{OUT}$	$\Omega$	100	
Load resistance <sup>(2)</sup>	$R_L$	$K\Omega$	$>10$	
<b>Accuracy - Dynamic performance data</b>				
Linearity <sup>(3)</sup> ( $0 \dots \pm I_{PN}$ )	$\varepsilon_L$	% of $I_{PN}$	$<\pm 1$	
Accuracy	X	% of $I_{PN}$	$<\pm 1$	@ $I_{PN}$ , $T_A = 25^\circ\text{C}$ (excluding offset)
Electrical offset voltage	$V_{OE}$	mV	$<\pm 20$	@ $T_A = 25^\circ\text{C}$
Hysteresis offset voltage	$V_{OH}$	mV	$<\pm 10$	@ $I_P = 0$ after an excursion of $1 * I_{PN}$
Temperature coefficient of $V_{OE}$	$TCV_{OE}$	mV/K	$<1$	
Temperature coefficient of $V_{OUT}$	$TCV_{OUT}$	%/K	$<\pm 0.1$	
Response time	$t_r$	$\mu\text{s}$	$<5$	@ 90% of $I_{PN}$ step
Frequency bandwidth <sup>(4)</sup>	BW	kHz	DC~25	@ -3dB
<b>General data</b>				
Ambient operating temperature	$T_A$	$^\circ\text{C}$	$-40 \sim +85$	
Ambient storage temperature	$T_S$	$^\circ\text{C}$	$-40 \sim +105$	
Mass	m	g	300	
<b>Isolation characteristics</b>				
Rated isolation voltage rms	$V_b$	V	1000	
Rms voltage for AC isolation test	$V_d$	KV	3	50 Hz, 1 min
Creepage distance	$dC_p$	mm	$>11$	
Clearance distance	$dC_I$	mm	$>11$	
Comparative Tracking Index	CTI		275	Group IIIa

### Notes:

- 1) Operating at  $\pm 12V \leq V_C < \pm 15V$  will reduce the measuring range.
- 2) If the customer uses  $10K\ \Omega$  of the load resistor, the primary current has to be limited as the nominal.
- 3) Linearity data exclude the electrical offset.
- 4) Please refer to derating curves in the technical file to avoid excessive core heating at high frequency.

**Dimensions SIOY3SV2** (in mm. 1 mm = 0.0394 inch)

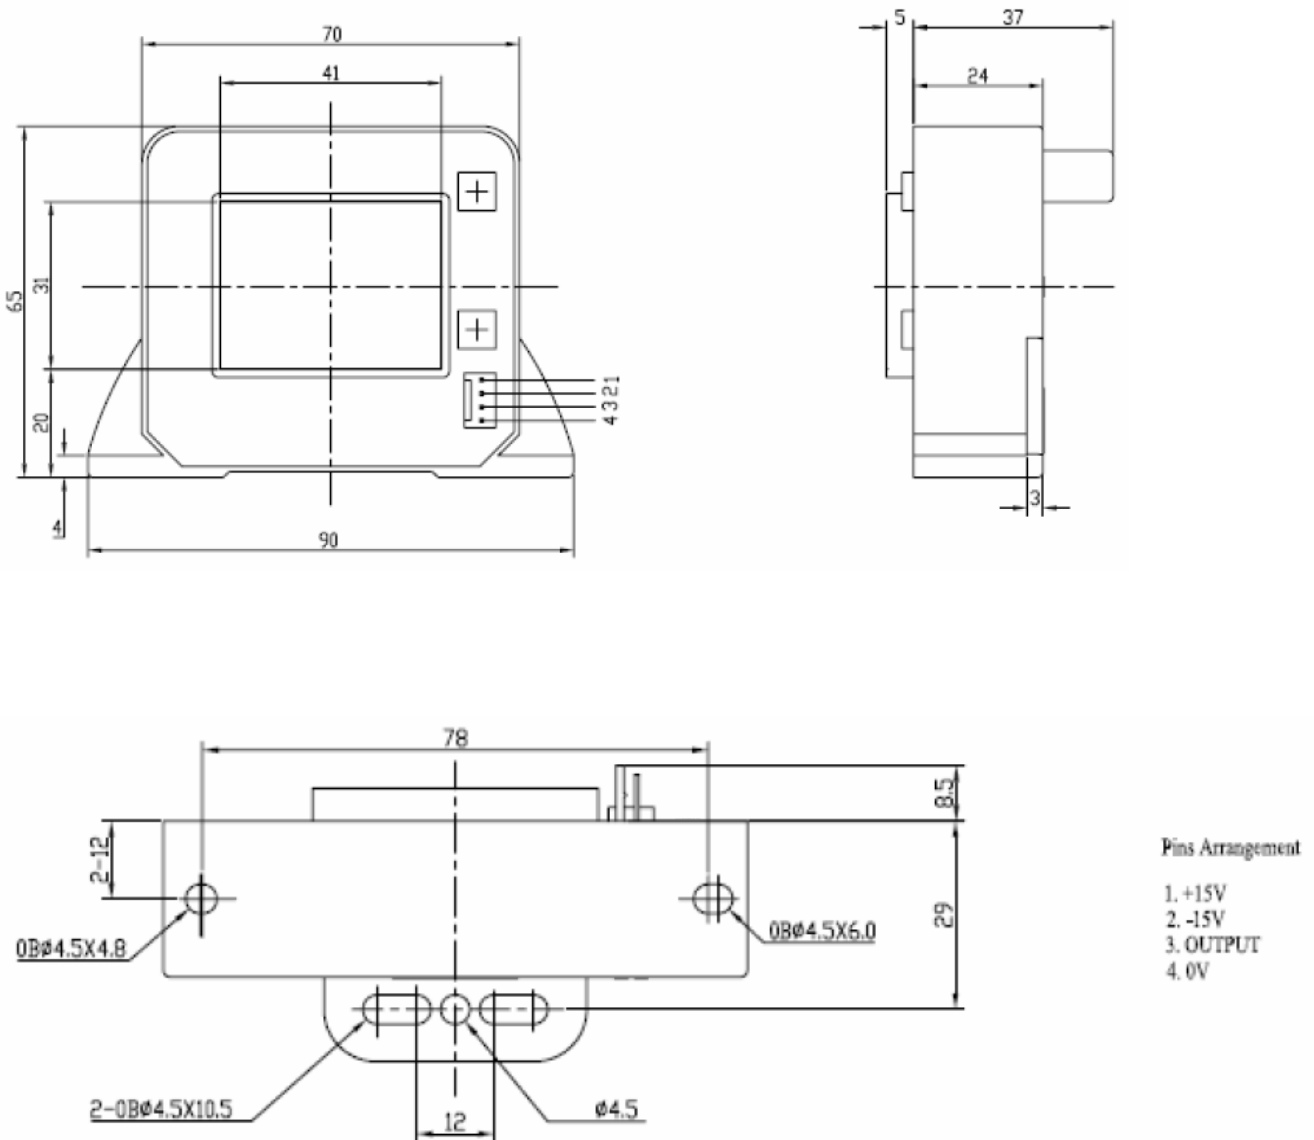

**Instructions of use**

- 1) When the test current passes through the sensors you can get the size of the output voltage.(Warning: wrong connection may lead to sensors damage)
- 2) Based on user needs, the sensors output range can be appropriately regulated.
- 3) According to user needs, different rated input currents and output voltages of the sensors can be customized.

## **RESTRICTIONS ON PRODUCT USE**

The information contained herein is subject to change without notice.

SEC ELECTRONICS INC. (for short SEC) exerts the greatest possible effort to ensure high quality and reliability. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing SEC products, to comply with the standards of safety in making a safe design for the entire system, including redundancy, fire-prevention measures, and malfunction prevention, to prevent any accidents, fires, or community damage that may ensue. In developing your designs, please ensure that SEC products are used within specified operating ranges as set forth in the most recent SEC products specifications.

The SEC products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These SEC products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury (“Unintended Usage”). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of SEC products listed in this document shall be made at the customer’s own risk.