




# 2SJ134

## FAST SWITCHING P-CHANNEL SILICON POWER MOS FET

### PACKAGE DIMENSIONS (Unit: mm)

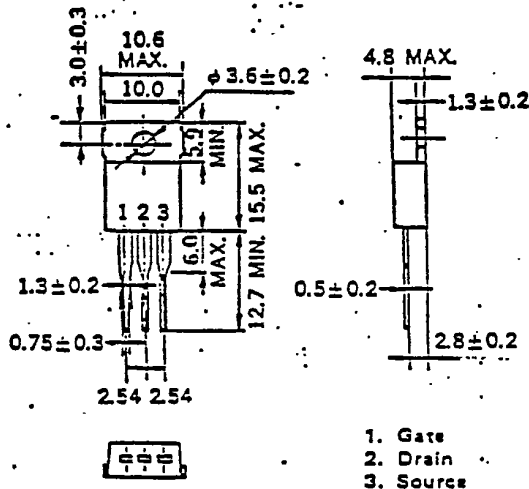

### Features

Suitable for switching power supplies,  
actuator controls and pulse circuits  
4V Gate Drive — Logic Level —  
Large current switching :  $I_D(DC) = 6A$   
Low  $R_{DS(on)}$

No Secondary Breakdown

### Absolute Maximum Ratings ( $T_a = 25^\circ C$ )



Drain to Source Voltage	$V_{DS}$	-100V
Gate to Source Voltage	$V_{GS}$	$\pm 20V$
Continuous Drain Current	$I_D(DC)$	$\pm 6.0A$
Pulse Drain Current	$I_D(pulse)$	$* \pm 24A$
Total Power Dissipation	$P_T$	1.5W
Total Power Dissipation	$P_{T**}$	40W
Channel Temperature	$T_{ch}$	150 °C
Storage Temperature	$T_{stg}$	-55 to +150 °C

\*  $T_{ch} \leq 150^\circ C$   
\*\*  $T_c = 25^\circ C$


### Electrical Characteristics ( $T_a = 25^\circ C$ )

Characteristics	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Drain Leakage Current	$I_{DSS}$			- 10	$\mu A$	$V_{DS} = -100V, V_{GS} = 0$
Gate to Source Leakage Current	$I_{GSS}$			100	nA	$V_{GS} = 20V, V_{DS} = 0$
Gate to Source Cutoff Voltage	$V_{GS(off)}$	-1.0		-3.0	V	$V_{DS} = -10V, I_D = -1.0mA$
Forward Transfer Admittance	$ y_{fs} $	1.0			S	$V_{DS} = -10V, I_D = -3.5A$
Drain to Source On-State Resistance	$R_{DS(on)}$			0.6	$\Omega$	$V_{GS} = -10V, I_D = -3.5A$
Drain to Source On-State Resistance	$R_{DS(on)}$			0.9	$\Omega$	$V_{GS} = -1.0V, I_D = -3.5A$
Input Capacitance	$C_{iss}$		1600		pF	$V_{DS} = -10V,$
Output Capacitance	$C_{oss}$		400		pF	$V_{GS} = 0,$
Reverse Transfer Capacitance	$C_{rss}$		65		pF	$f = 1.0MHz$
Turn-On Delay Time	$t_d(on)$		9		ns	$I_D = -3.5A,$
Rise Time	$t_r$		35		ns	$V_{GS(on)} = -10V,$
Turn-Off Delay Time	$t_d(off)$		55		ns	$V_{cc} = -50V,$
Fall Time	$t_f$		40		ns	$R_L = 15 \Omega$


TURN-ON AND TURN-OFF TIME TEST CIRCUIT

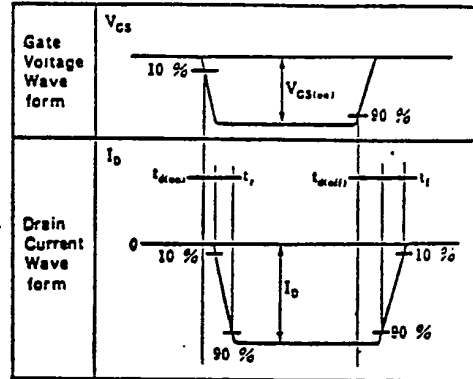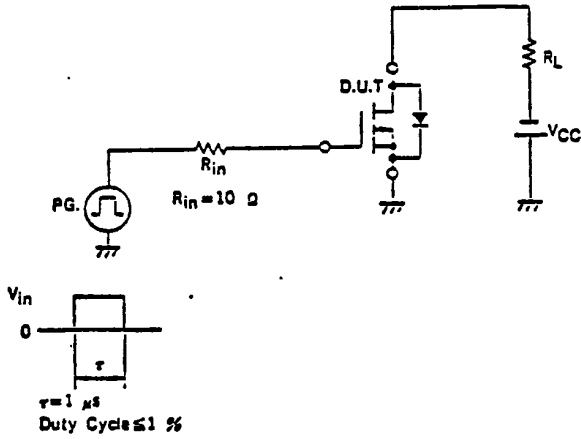


DERATING FACTOR OF FORWARD BIAS SAFE OPERATING AREA

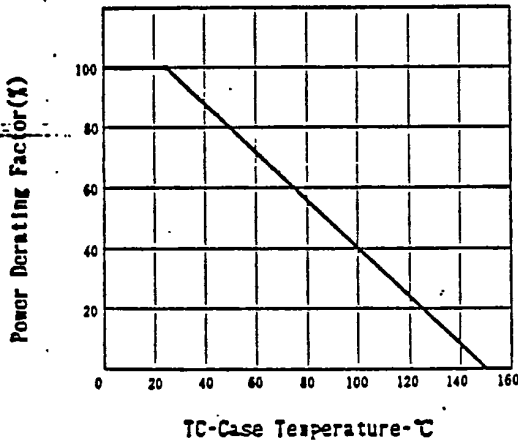


FORWARD BIAS SAFE OPERATING AREA






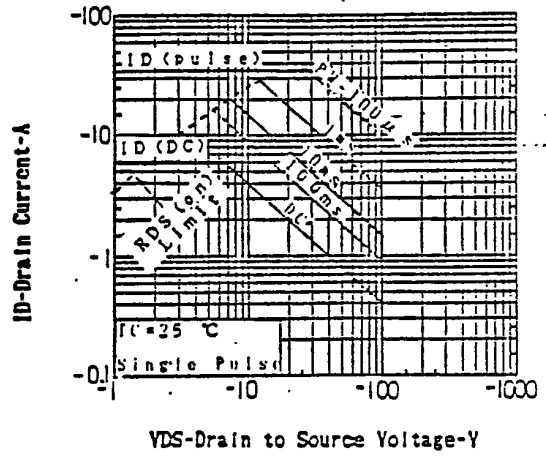


TOTAL POWER DISSIPATION vs. CASE TEMPERATURE

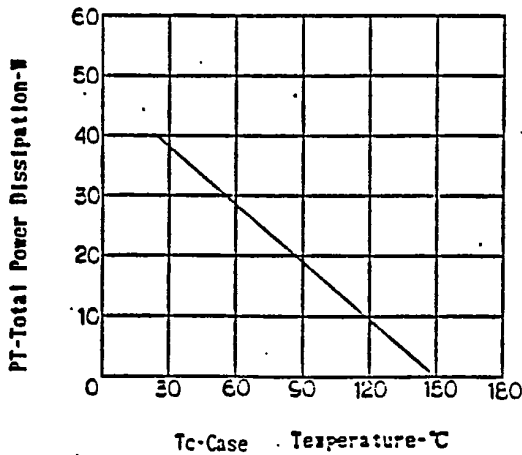


DRAIN CURRENT vs. DRAIN TO SOURCE VOLTAGE

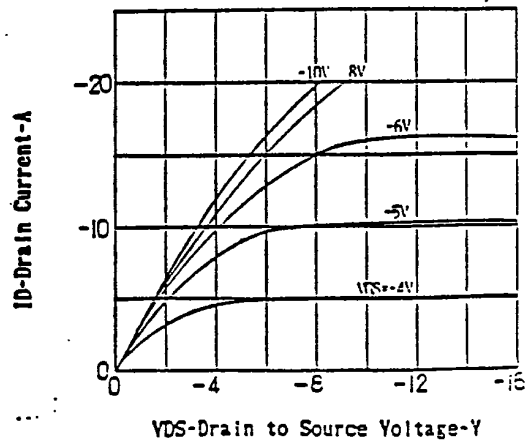


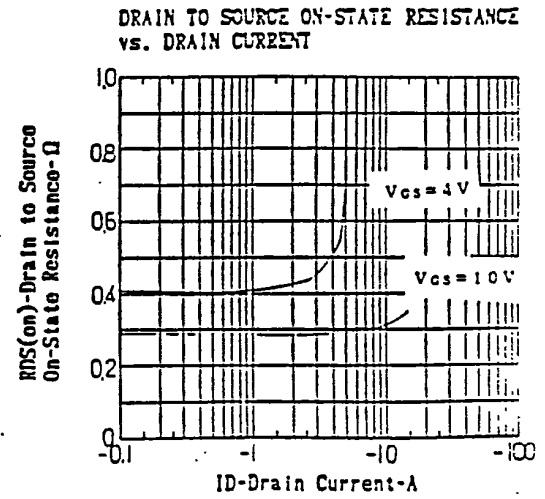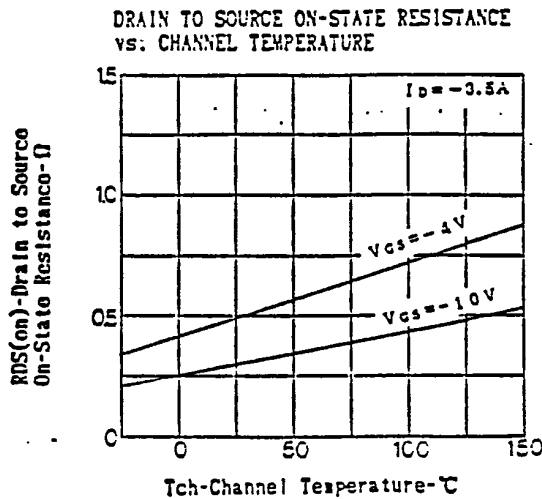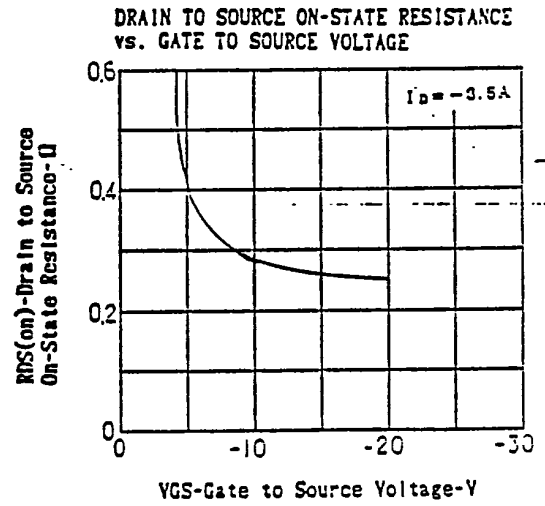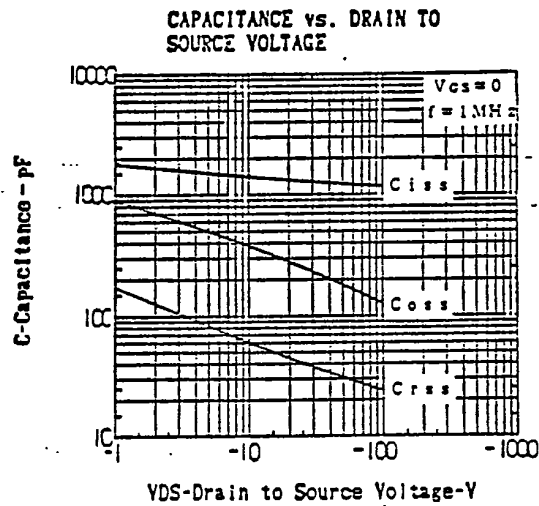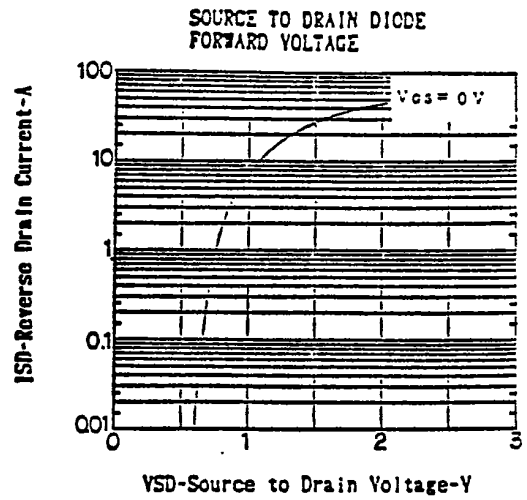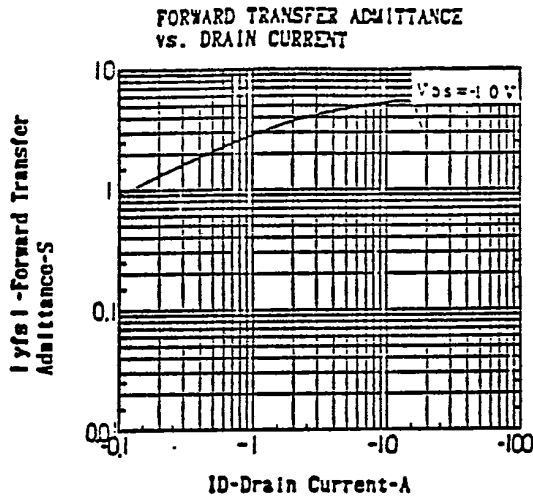


TRANSFER CHARACTERISTICS

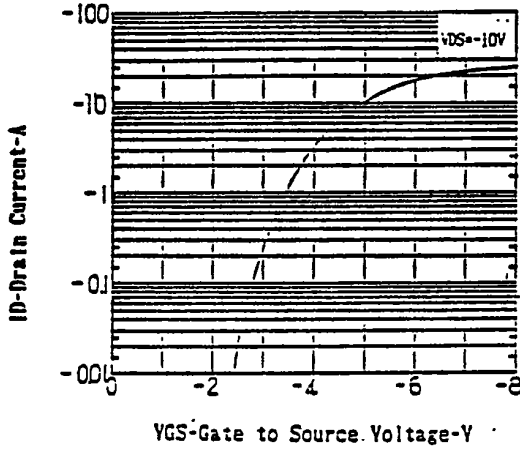

GATE TO SOURCE CUTOFF VOLTAGE vs. CHANNEL TEMPERATURE

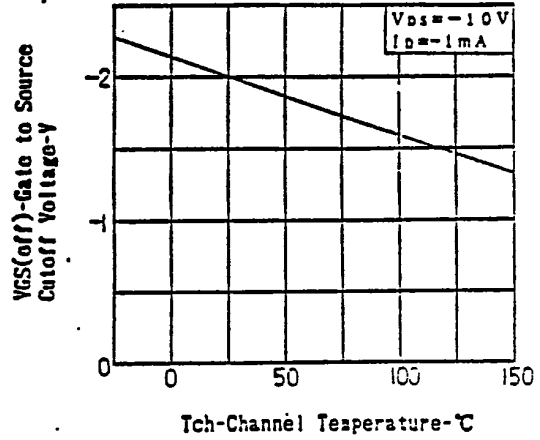

SWITCHING TIME vs. DRAIN CURRENT

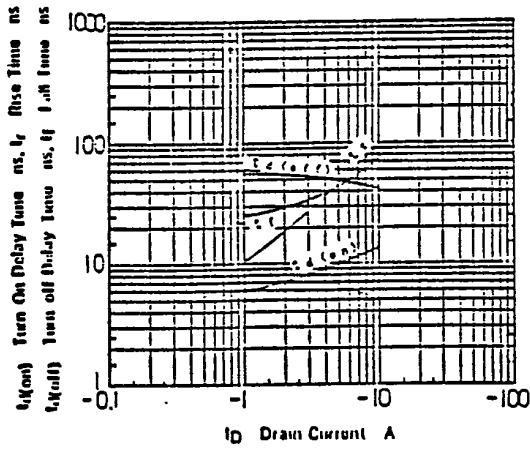

NEC Corporation

INTERNATIONAL ELECTRON DEVICES DIV.  
 NEC Building, 33-1, Shiba Gochome  
 Minato-ku, Tokyo 108, Japan  
 Tel. Tokyo 454-1111  
 Telex Address: NECTOK J22686  
 Cable Address: MICROPHONE TOKYO