

SKM1000GAR17R8



SEMITRANS® 10

IGBT R8 Modules

SKM1000GAR17R8

Features*

- Symmetrical current sharing
- Low-inductive module design
- High mechanical robustness
- UL recognized, file no. E63532

Typical Applications


- Brake chopper
- Windturbines

Remarks

Recommended $T_{jop} = -40 \dots +150^{\circ}\text{C}$

Absolute Maximum Ratings				
Symbol	Conditions		Values	Unit
IGBT				
V_{CES}	$T_j = 25^{\circ}\text{C}$		1700	V
I_C	$T_j = 175^{\circ}\text{C}$	$T_c = 25^{\circ}\text{C}$	1574	A
		$T_c = 100^{\circ}\text{C}$	1027	A
I_{Cnom}			1000	A
I_{CRM}			2000	A
V_{GES}			-20 ... 20	V
t_{psc}	$V_{CC} = 1200\text{ V}$ $V_{GE} \leq 15\text{ V}$ $V_{CES} \leq 1700\text{ V}$	$T_j = 150^{\circ}\text{C}$	10	μs
T_j			-40 ... 175	$^{\circ}\text{C}$
Inverse diode				
V_{RRM}	$T_j = 25^{\circ}\text{C}$		1700	V
I_F	$T_j = 175^{\circ}\text{C}$	$T_c = 25^{\circ}\text{C}$	1449	A
		$T_c = 100^{\circ}\text{C}$	905	A
I_{FRM}			2000	A
I_{FSM}	$t_p = 10\text{ ms, sin } 180^{\circ}, T_j = 25^{\circ}\text{C}$		6240	A
T_j			-40 ... 175	$^{\circ}\text{C}$
Freewheeling diode				
V_{RRM}	$T_j = 25^{\circ}\text{C}$		1700	V
I_F	$T_j = 175^{\circ}\text{C}$	$T_c = 25^{\circ}\text{C}$	1449	A
		$T_c = 100^{\circ}\text{C}$	905	A
I_{FRM}			2000	A
I_{FSM}	$t_p = 10\text{ ms, sin } 180^{\circ}, T_j = 25^{\circ}\text{C}$		6240	A
T_j			-40 ... 175	$^{\circ}\text{C}$
Module				
T_{stg}			-40 ... 150	$^{\circ}\text{C}$
V_{isol}	AC sinus 50 Hz, $t = 1\text{ min}$		4000	V

Characteristics						
Symbol	Conditions		min.	typ.	max.	Unit
IGBT						
$V_{CE(sat)}$	$I_C = 1000\text{ A}$ $V_{GE} = 15\text{ V}$ chipelevel	$T_j = 25^{\circ}\text{C}$	1.66	1.99		V
		$T_j = 150^{\circ}\text{C}$	2.01	2.33		V
V_{CE0}	chipelevel	$T_j = 25^{\circ}\text{C}$	1.06	1.12		V
		$T_j = 150^{\circ}\text{C}$	0.95	1.05		V
r_{CE}	$V_{GE} = 15\text{ V}$ chipelevel	$T_j = 25^{\circ}\text{C}$	0.60	0.87		$\text{m}\Omega$
		$T_j = 150^{\circ}\text{C}$	1.06	1.28		$\text{m}\Omega$
$V_{GE(th)}$	$V_{CE} = 10\text{ V}, I_C = 36\text{ mA}$		5	5.8	6.5	V
I_{CES}	$V_{GE} = 0\text{ V}, V_{CE} = 1700\text{ V}, T_j = 25^{\circ}\text{C}$				6.0	mA
C_{ies}	$V_{CE} = 25\text{ V}$ $V_{GE} = 0\text{ V}$	$f = 1\text{ MHz}$	90.0			nF
C_{oes}		$f = 1\text{ MHz}$	3.00			nF
C_{res}		$f = 1\text{ MHz}$	0.24			nF
Q_G	$V_{GE} = -15\text{ V} \dots +15\text{ V}$		5640			nC
R_{Gint}	$T_j = 25^{\circ}\text{C}$		1.7			Ω

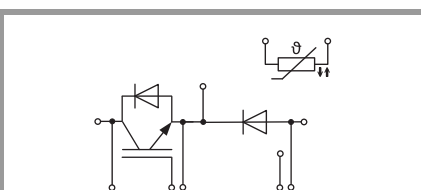

GAR



SEMITRANS® 10

IGBT R8 Modules

SKM1000GAR17R8

Features*


- Symmetrical current sharing
- Low-inductive module design
- High mechanical robustness
- UL recognized, file no. E63532

Typical Applications

- Brake chopper
- Windturbines

Remarks

Recommended $T_{jop} = -40 \dots +150^\circ\text{C}$

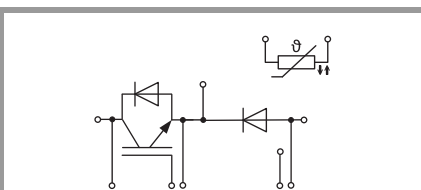

GAR

Characteristics					
Symbol	Conditions	min.	typ.	max.	Unit
IGBT					
$t_{d(on)}$	$V_{CC} = 900\text{ V}$	$T_j = 150^\circ\text{C}$	450		ns
t_r	$I_C = 1000\text{ A}$	$T_j = 150^\circ\text{C}$	95		ns
E_{on}	$V_{GE} = +15/-15\text{ V}$ $R_{G\ on} = 0.7\ \Omega$	$T_j = 150^\circ\text{C}$	415		mJ
$t_{d(off)}$	$R_{G\ off} = 0.7\ \Omega$	$T_j = 150^\circ\text{C}$	620		ns
t_f	$di/dt_{on} = 9.7\text{ kA}/\mu\text{s}$ $di/dt_{off} = 5.5\text{ kA}/\mu\text{s}$	$T_j = 150^\circ\text{C}$	155		ns
E_{off}	$dv/dt = 4300\text{ V}/\mu\text{s}$ $L_s = 36\text{ nH}$	$T_j = 150^\circ\text{C}$	345		mJ
$R_{th(j-c)}$	per IGBT			0.03	K/W
$R_{th(c-s)}$	per IGBT ($\lambda_{grease}=0.81\text{ W}/(\text{m}^2\text{K})$)		0.016		K/W
Inverse diode					
$V_F = V_{EC}$	$I_F = 1000\text{ A}$ $V_{GE} = 0\text{ V}$ chiplevel	$T_j = 25^\circ\text{C}$	1.78	2.12	V
		$T_j = 150^\circ\text{C}$	1.81	2.14	V
V_{F0}	chiplevel	$T_j = 25^\circ\text{C}$	1.32	1.56	V
		$T_j = 150^\circ\text{C}$	1.08	1.22	V
r_F	chiplevel	$T_j = 25^\circ\text{C}$	0.46	0.56	m Ω
		$T_j = 150^\circ\text{C}$	0.73	0.92	m Ω
I_{RRM}	$I_F = 1000\text{ A}$	$T_j = 150^\circ\text{C}$	885		A
Q_{rr}	$V_{GE} = -15\text{ V}$ $di/dt_{off} = 9.2\text{ kA}/\mu\text{s}$	$T_j = 150^\circ\text{C}$	355		μC
E_{rr}	$V_R = 900\text{ V}$	$T_j = 150^\circ\text{C}$	185		mJ
$R_{th(j-c)}$	per diode			0.042	K/W
$R_{th(c-s)}$	per diode ($\lambda_{grease}=0.81\text{ W}/(\text{m}^2\text{K})$)		0.017		K/W
Freewheeling diode					
$V_F = V_{EC}$	$I_F = 1000\text{ A}$ $V_{GE} = 0\text{ V}$ level = chiplevel	$T_j = 25^\circ\text{C}$	1.78	2.12	V
		$T_j = 150^\circ\text{C}$	1.81	2.14	V
V_{F0}	chiplevel	$T_j = 25^\circ\text{C}$	1.32	1.56	V
		$T_j = 150^\circ\text{C}$	1.08	1.22	V
r_F	chiplevel	$T_j = 25^\circ\text{C}$	0.46	0.56	m Ω
		$T_j = 150^\circ\text{C}$	0.73	0.92	m Ω
I_{RRM}	$I_F = 1000\text{ A}$	$T_j = 150^\circ\text{C}$	885		A
Q_{rr}	$di/dt_{off} = 9.2\text{ kA}/\mu\text{s}$ $V_{GE} = -15\text{ V}$	$T_j = 150^\circ\text{C}$	355		μC
E_{rr}	$V_R = 900\text{ V}$	$T_j = 150^\circ\text{C}$	185		mJ
$R_{th(j-c)}$	per diode			0.042	K/W
$R_{th(c-s)}$	per diode ($\lambda_{grease}=0.81\text{ W}/(\text{m}^2\text{K})$)		0.017		K/W
Module					
L_{CE}			10		nH
R_{CC+EE}	measured per switch, $T_C = 25^\circ\text{C}$		0.2		m Ω
$R_{th(c-s)1}$	calculated without thermal coupling ($\lambda_{grease}=0.81\text{ W}/(\text{m}^2\text{K})$)		0.0041		K/W
$R_{th(c-s)2}$	including thermal coupling, T_s underneath module ($\lambda_{grease}=0.81\text{ W}/(\text{m}^2\text{K})$)		0.007		K/W
M_s	to heat sink M5	4		6	Nm
M_t		to terminals M8	8	10	Nm
		to terminals M4	1.8	2.1	Nm
w				1250	g

SKM1000GAR17R8



SEMITRANS® 10

IGBT R8 Modules

SKM1000GAR17R8

Features*

- Symmetrical current sharing
- Low-inductive module design
- High mechanical robustness
- UL recognized, file no. E63532

Typical Applications


- Brake chopper
- Windturbines

Remarks

Recommended $T_{jop} = -40 \dots +150^{\circ}\text{C}$

Characteristics

Symbol	Conditions	min.	typ.	max.	Unit
Temperature Sensor					
R_{100}	$T_c=100^{\circ}\text{C}$ ($R_{25}=5 \text{ k}\Omega$)		$493 \pm 5\%$		Ω
$B_{100/125}$	$R(T)=R_{100}\exp[B_{100/125}(1/T-1/T_{100})]$; $T[\text{K}]$;		$3550 \pm 2\%$		K

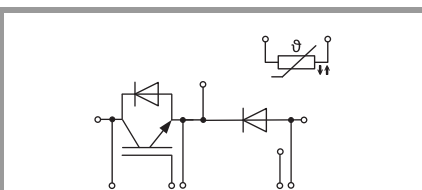

GAR

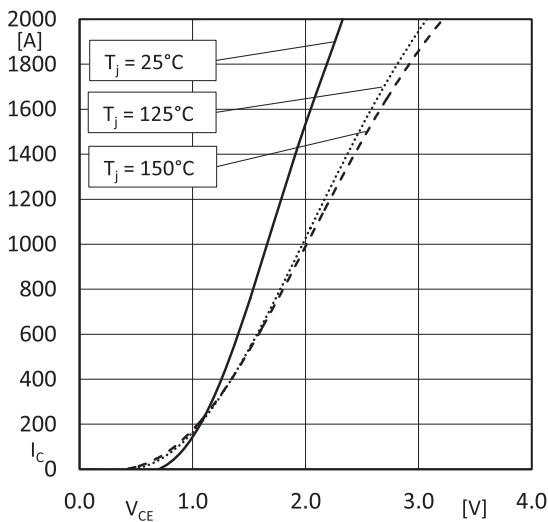


Fig. 1: Output characteristics IGBT (typical); $I_C = f(V_{CE})$; $V_{GE} = 15V$; (chipelevel)

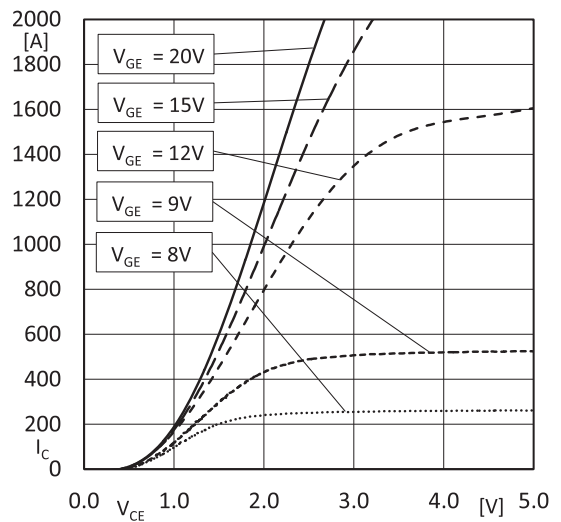


Fig. 2: Output characteristics IGBT (typical); $I_C = f(V_{CE})$; $T_j = 150^\circ C$; (chipelevel)

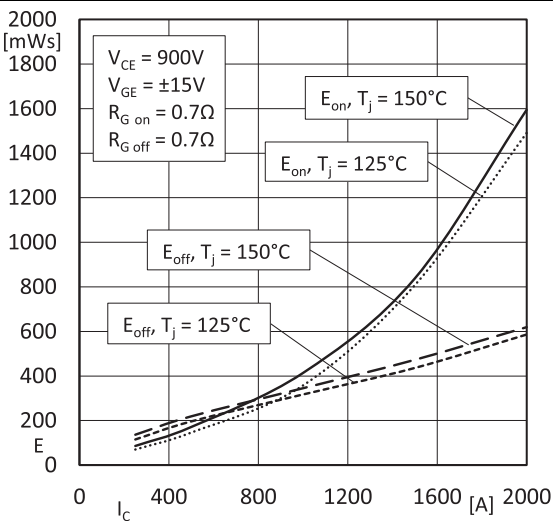


Fig. 3: Switching losses IGBT (typical); $E=f(I_C)$

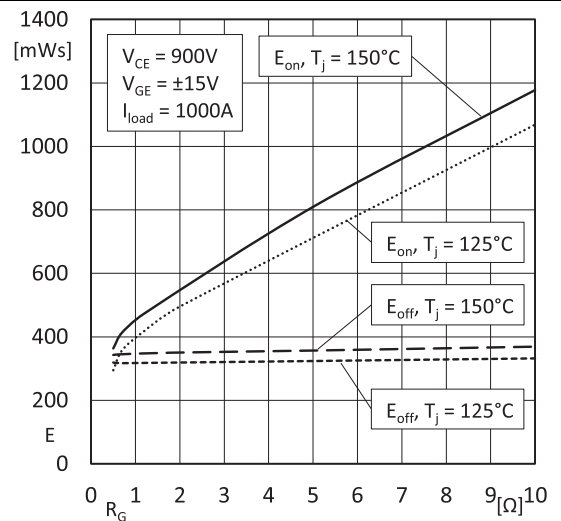


Fig. 4: Switching losses IGBT (typical); $E=f(R_G)$

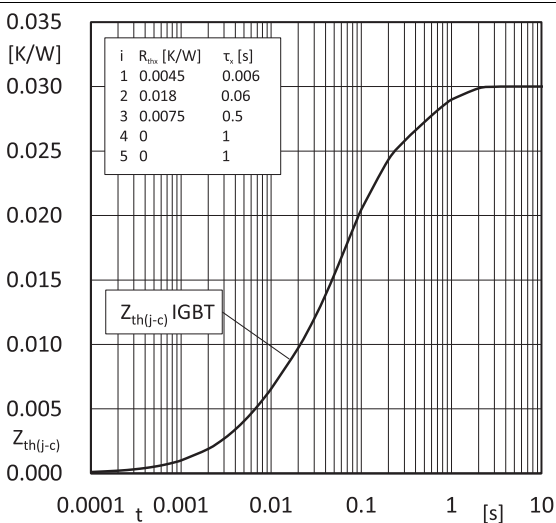


Fig. 5: Transient thermal impedance IGBT

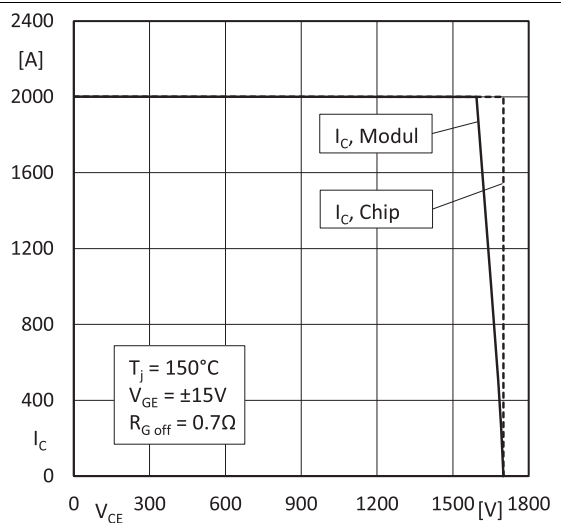


Fig. 6: RBSOA IGBT

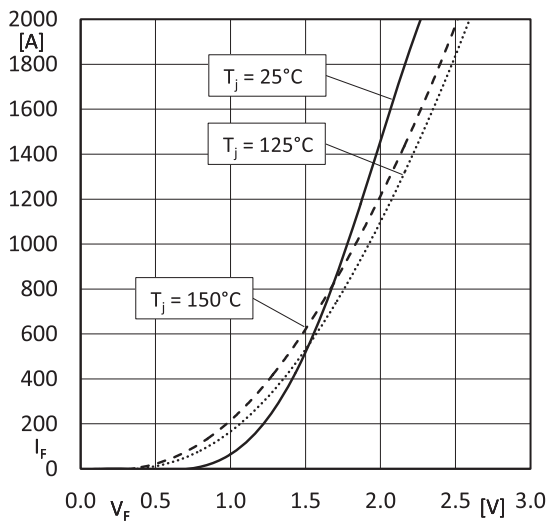


Fig. 7: Forward charact. Diode (typical); $I_F = f(V_F)$; (chipllevel)

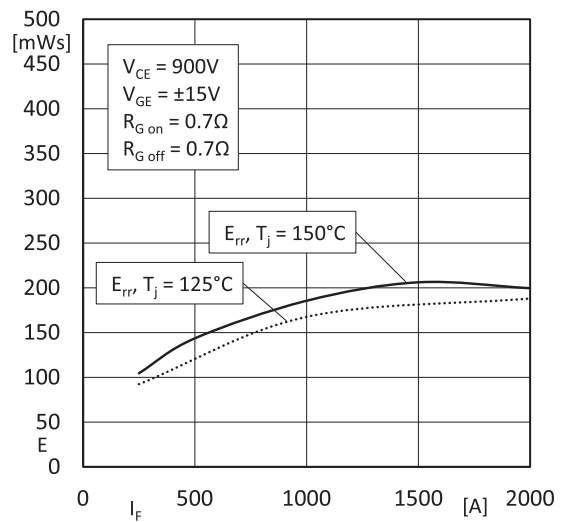


Fig. 8: Switching losses Diode (typical); $E = f(I_F)$

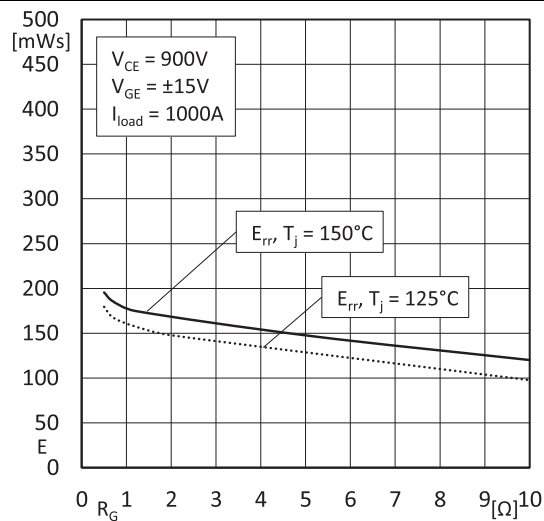


Fig. 9: Switching losses Diode (typical); $E = f(R_G)$

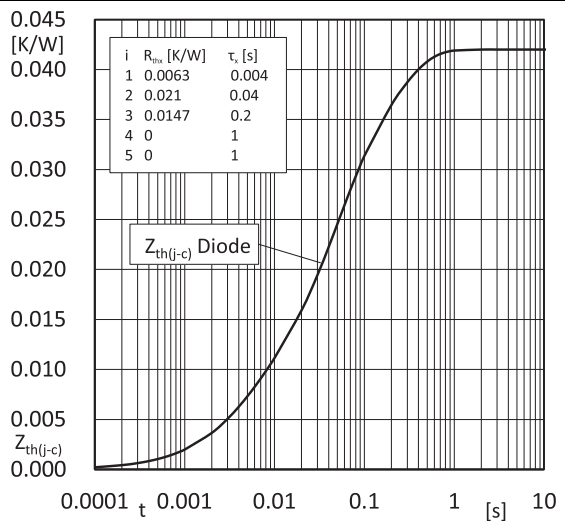


Fig. 10: Transient thermal impedance Diode

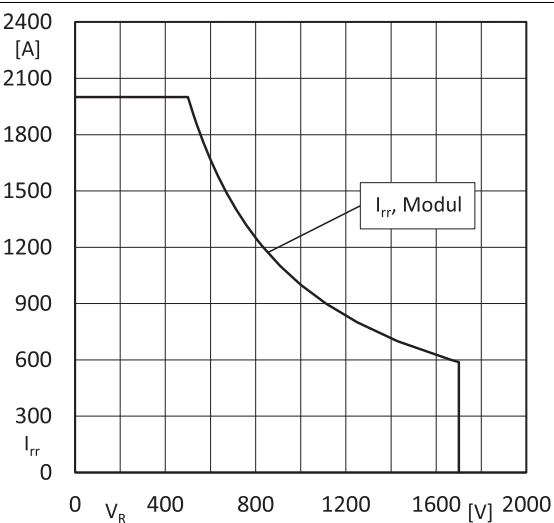


Fig. 11: RBSOA Diode

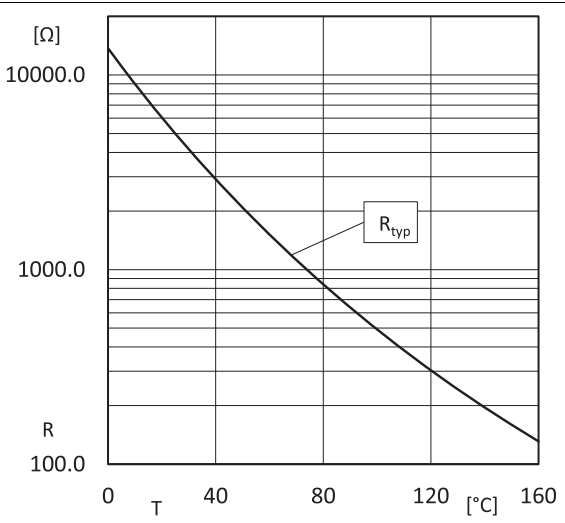


Fig. 12: NTC characteristics (typical)

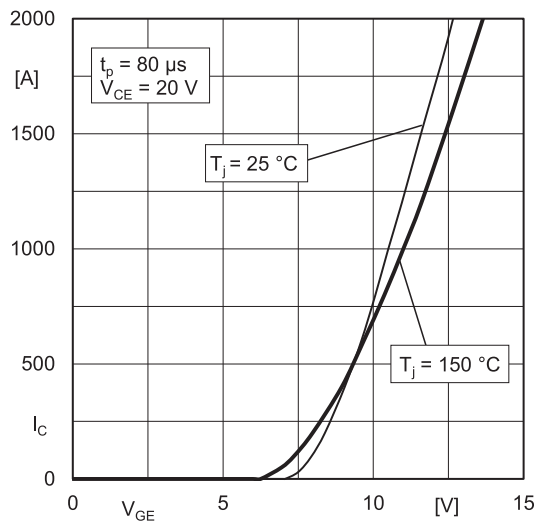


Fig. 13: Typ. transfer characteristic





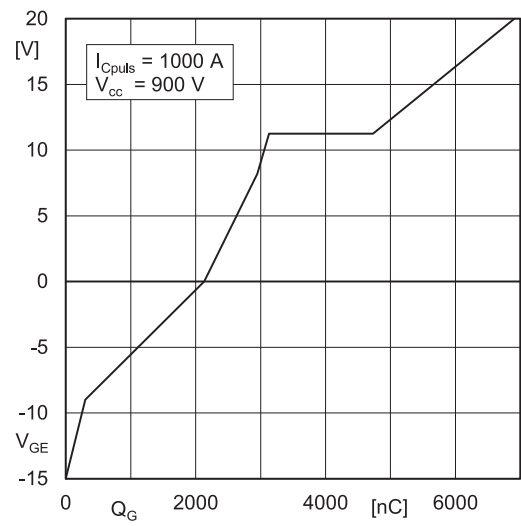



Fig. 14: Typ. gate charge characteristic

SKM1000GAR17R8

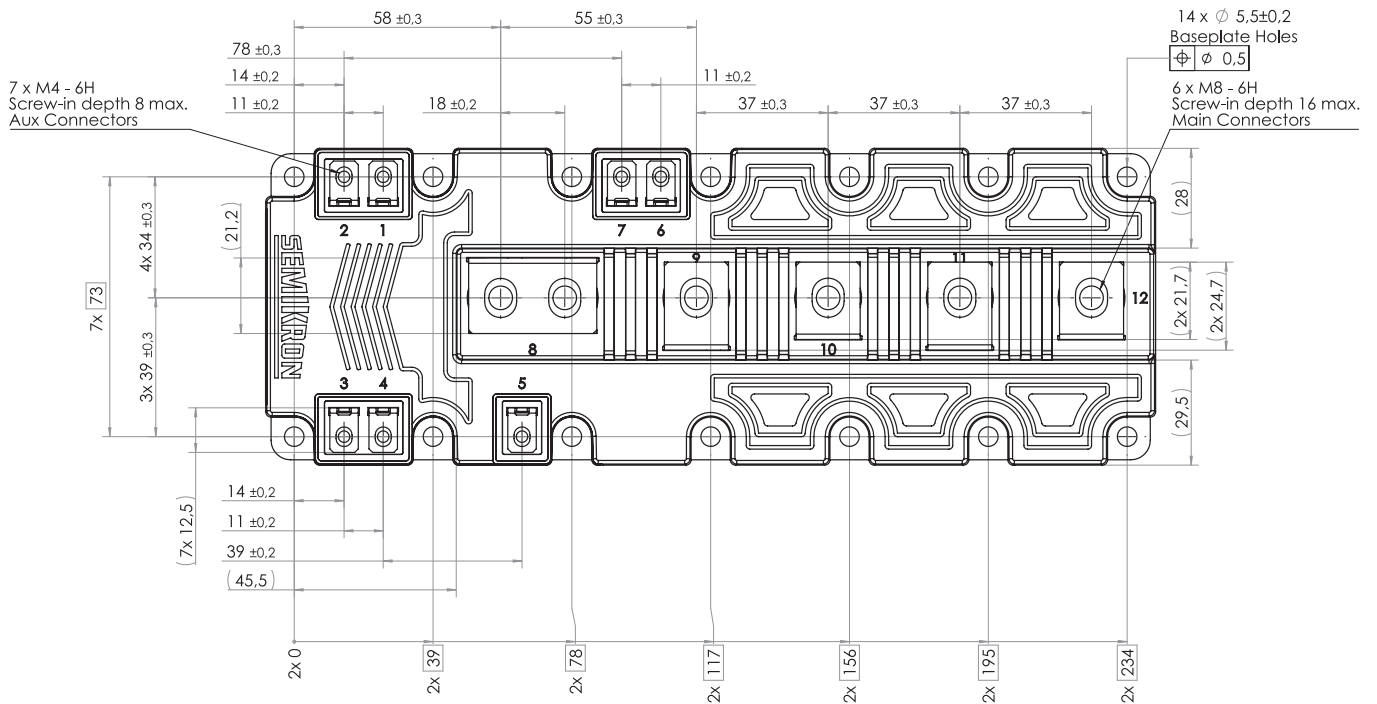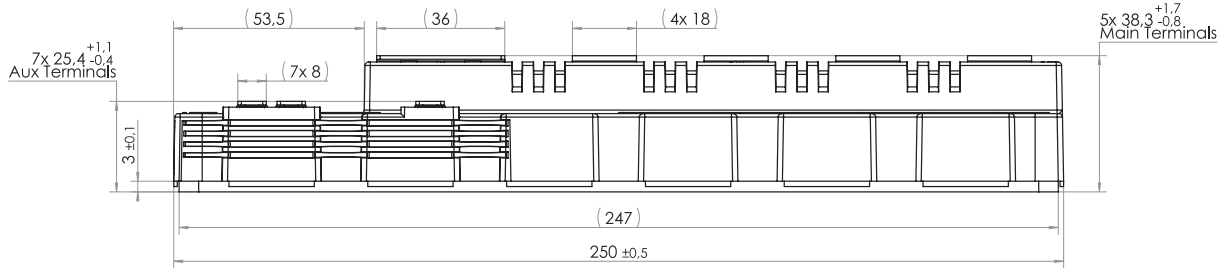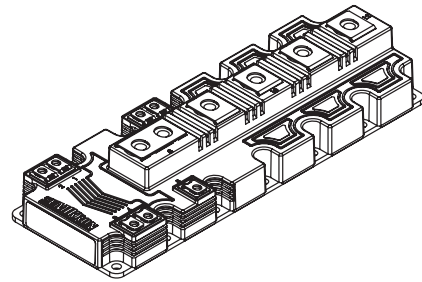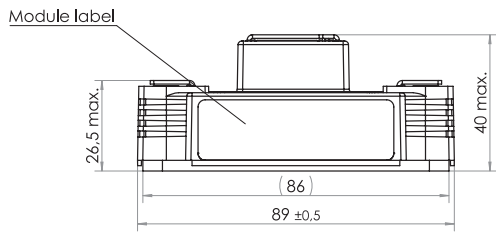

- Dimensions in mm
- General tolerances ±0.5mm

SEMITRANS 10

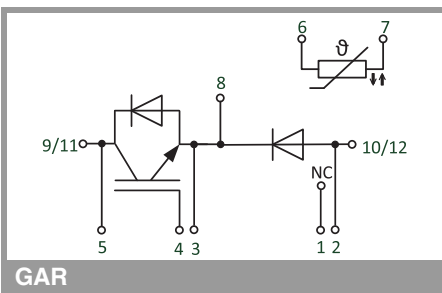

This is an electrostatic discharge sensitive device (ESDS) due to international standard IEC 61340.

***IMPORTANT INFORMATION AND WARNINGS**

The specifications of SEMIKRON products may not be considered as guarantee or assurance of product characteristics ("Beschaffenheitsgarantie"). The specifications of SEMIKRON products describe only the usual characteristics of products to be expected in typical applications, which may still vary depending on the specific application. Therefore, products must be tested for the respective application in advance. Application adjustments may be necessary. The user of SEMIKRON products is responsible for the safety of their applications embedding SEMIKRON products and must take adequate safety measures to prevent the applications from causing a physical injury, fire or other problem if any of SEMIKRON products become faulty. The user is responsible to make sure that the application design is compliant with all applicable laws, regulations, norms and standards. Except as otherwise explicitly approved by SEMIKRON in a written document signed by authorized representatives of SEMIKRON, SEMIKRON products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury. No representation or warranty is given and no liability is assumed with respect to the accuracy, completeness and/or use of any information herein, including without limitation, warranties of non-infringement of intellectual property rights of any third party. SEMIKRON does not assume any liability arising out of the applications or use of any product; neither does it convey any license under its patent rights, copyrights, trade secrets or other intellectual property rights, nor the rights of others. SEMIKRON makes no representation or warranty of non-infringement or alleged non-infringement of intellectual property rights of any third party which may arise from applications. Due to technical requirements our products may contain dangerous substances. For information on the types in question please contact the nearest SEMIKRON sales office. This document supersedes and replaces all information previously supplied and may be superseded by updates. SEMIKRON reserves the right to make changes.