

- Supports a 9-Pin GeoPort™ Host Interface Standard for the Intelligent Network Port
- Designed to Operate up to 4-Mbit/s Full Duplex
- ± 5 V Supply Operation
- Has Driver Short-Circuit Protection
- Includes Failsafe Mechanism for Open Inputs
- Is Backward Compatible with AppleTalk™ and LocalTalk™
- Combines Multiple Components into a Single Chip Solution
- Complements the SN75LBC772 9-Pin GeoPort Peripheral (DCE) Interface Device
- Uses LinBiCMOS™ Process Technology


description

The SN75LBC773 is a low-power LinBiCMOS device that incorporates the drivers and receivers for a 9-pin GeoPort host interface. GeoPort combines hybrid EIA/TIA-422-B and EIA/TIA-423-B drivers and receivers to transmit data up to four-Mbit/s full duplex. GeoPort is a serial communications standard that is intended to replace the RS-232, AppleTalk, and printer ports all in one connector in addition to providing real-time data transfer capability. The SN75LBC773 provides point-to-point connections between GeoPort-compatible devices with data transmission rates up to 4-Mbit/s full duplex featuring a hot-plug capability. Applications include connection to telephone, ISDN, digital sound and imaging, fax-data modems, and other traditional serial and parallel connections. The GeoPort is backwardly compatible to both LocalTalk and AppleTalk.


While the SN75LBC773 is powered off (V_{CC} and $V_{EE} = 0$), the outputs are in a high-impedance state. A logic high on the driver enable ($\overline{DEN}$) or logic low on the receive enable (REN) terminals places the outputs of the differential driver and receivers, respectively, into a high-impedance state. All drivers and receivers have fail-safe mechanisms that ensure a high output state when the inputs are left open.

The SN75LBC773 is characterized for operation over the 0°C to 70°C temperature range.

DW PACKAGE
(TOP VIEW)

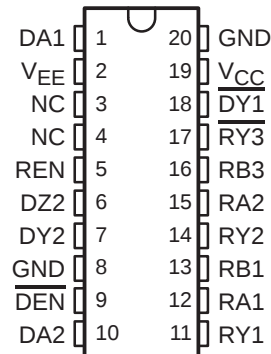

logic diagram (positive logic)

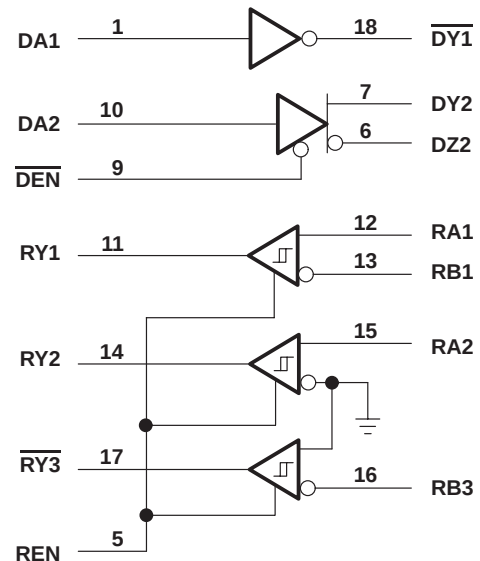

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

GeoPort, LocalTalk, and AppleTalk are trademarks of Apple Computer, Incorporated.
LinBiCMOS is a trademark of Texas Instruments Incorporated.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1997, Texas Instruments Incorporated

FUNCTION TABLES†

SINGLE-ENDED DRIVER	
INPUT (DA1)	OUTPUT (DY1)
H	L
L	H
OPEN	L

DIFFERENTIAL DRIVER			
INPUT (DA2)	ENABLE (DEN)	OUTPUT (DY2) (DZ2)	
H	L	H	L
L	L	L	H
OPEN	L	H	L
X	H	Z	Z
X	OPEN	Z	Z

SINGLED-ENDED RECEIVER			
INPUT (RA2, RA3)	ENABLE (REN)	OUTPUT (RY2) (RY3)	
H	H	H	L
L	H	L	H
OPEN	H	H	H
SHORT‡	H	?	?
X	L	Z	Z
X	OPEN	Z	Z

DIFFERENTIAL RECEIVER			
INPUT (RA1) (RB1)	ENABLE (REN)	OUTPUT (RY1)	
H L	H	H	
L H	H	L	
OPEN	H	H	
SHORT‡	H	?	
X X	L	Z	
X X	OPEN	Z	

† H = high level, L = low level, X = irrelevant, ? = indeterminate, Z = high impedance (off)

‡ $-0.2\text{ V} < V_{ID} < 0.2\text{ V}$

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)§

Positive supply voltage range, V_{CC} (see Note 1)	–0.5 to 7 V
Negative supply voltage range, V_{EE} (see Note 1)	–7 to 0.5 V
Receiver input voltage range (RA, RB)	–15 V to 15 V
Receiver differential input voltage range, V_{ID}	–12 V to 12 V
Receiver output voltage range (RY)	–0.5 V to 5.5 V
Driver output voltage range (Power Off) ($\overline{DY1}$, DY2, DZ2)	–15 V to 15 V
Driver output voltage range (Power On) ($\overline{DY1}$, DY2, DZ2)	–11 V to 11 V
Driver input voltage range (DA, REN, $\overline{DEN}$)	–0.5 V to $V_{CC} + 0.4\text{ V}$
Electrostatic Discharge (All pins) Human Body Model (see Note 2)	6 kV
Continuous total power dissipation	See Dissipation Rating Table
Operating free-air temperature range, T_A	0°C to 70°C
Storage temperature range, T_{stg}	–65°C to 150°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C

§ Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. All voltage values are with respect to network ground terminal unless otherwise noted.

2. This rating is per MIL-PRF-38535, Method 3015.7.

DISSIPATION RATING TABLE

PACKAGE	$T_A \leq 25^\circ\text{C}$ POWER RATING	DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$	$T_A = 70^\circ\text{C}$ POWER RATING
DW	1125 mW	9.0 mW/°C	720 mW

recommended operating conditions

	MIN	NOM	MAX	UNIT
Positive supply voltage, V_{CC}	4.75	5	5.25	V
Negative supply voltage, V_{EE}	-5.25	-5	-4.75	V
High-level input voltage, V_{IH} (DA, REN, $\overline{DEN}$)	2			V
Low-level input voltage, V_{IL} (DA, REN, $\overline{DEN}$)			0.8	V
Receiver common-mode input voltage, V_{IC}	-7		7	V
Receiver differential input voltage, V_{ID}	-12		12	V
Operating free-air temperature, T_A	0		70	°C

driver electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT		
V _{OH}	High-level output voltage	Single-ended, See Figure 1	R _L = 12 kΩ	3.6	4.5		V		
			R _L = 120 Ω	2	3.6		V		
V _{OL}	Low-level output voltage		R _L = 12 kΩ		−4.5	−3.6	V		
			R _L = 120 Ω		−3.6	−2	V		
V _{OD}	Magnitude of differential output voltage V _{DY} − V _{DZ}	R _L = 120 Ω, See Figure 2		4			V		
Δ V _{OD}	Change in differential voltage magnitude								250
V _{OC}	Common-mode output voltage	See Figure 3		−2		2	V		
ΔV _{OC(SS)}	Magnitude of change, common-mode steady-state output voltage							200	mV
ΔV _{OC(PP)}	Magnitude of change, common-mode peak-to-peak output voltage							700	mV
I _{CC}	Positive supply current	REN = 5 V, $\overline{\text{DEN}}$ = 0 V, No Load		4		10	mA		
I _{EE}	Negative supply current							−2	−5
I _{CC}	Positive supply current	REN = 0 V, $\overline{\text{DEN}}$ = 5 V, No Load				100	μA		
I _{EE}	Negative supply current							−100	μA
I _{OZ}	High-impedance output current	V _{CC} = 0 or 5 V, −10 ≤ V _O ≤ 10 V				±100	μA		
I _{OS}	Short-circuit output current	V _{CC} = 5.25 V, −5 V ≤ V _O ≤ 5 V, See Note 3			±170	±450	mA		

NOTE 3: Not more than one output should be shorted at one time.

SN75LBC773

GEOPORT™ TRANSCEIVER

SLLS247C – FEBRUARY 1997 – NOVEMBER 1997

driver switching characteristics over operating free-air temperature range

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t _{PHL}	Propagation delay time, high-to-low level output	Single ended, See Figure 4		42	75	ns
t _{PLH}	Propagation delay time, low-to-high level output			41	75	ns
t _{PZL}	Driver output enable time to low-level output			25	100	ns
t _{PZH}	Driver output enable time to high-level output			25	100	ns
t _{PLZ}	Driver output disable time from low-level output			28	100	ns
t _{PHZ}	Driver output disable time from high-level output			37	100	ns
t _r	Rise time		10	25	75	ns
t _f	Fall time		10	23	75	ns
t _{PHL}	Propagation delay time, high-to-low level output	Differential, See Figure 5		40	75	ns
t _{PLH}	Propagation delay time, low-to-high level output			42	75	ns
t _{PZL}	Driver output enable time to low-level output			29	150	ns
t _{PZH}	Driver output enable time to high-level output			35	150	ns
t _{PLZ}	Driver output disable time from low-level output			34	100	ns
t _{PHZ}	Driver output disable time from high-level output			34	100	ns
t _r	Rise time		10	27	75	ns
t _f	Fall time		10	26	75	ns
t _{SK(p)}	Pulse skew, t _{PLH} – t _{PHL}				22	ns

receiver electrical characteristics over recommended operating conditions (unless otherwise noted)


PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V_{IT+}	Positive-going input threshold voltage	See Figure 6			200	mV
V_{IT-}	Negative-going input threshold voltage		-200			mV
V_{hys}	Differential input voltage hysteresis ($V_{IT+} - V_{IT-}$)			50		mV
V_{OH}	High-level output voltage (see Note 4)	$V_{IC} = 0$, See Figure 6 $I_{OH} = -2$ mA,	2	4.5		V
V_{OL}	Low-level output voltage	$V_{IC} = 0$, See Figure 6 $I_{OL} = 2$ mA,		0.4	0.8	V
I_{OS}	Short-circuit output current	$V_O = 0$	-45	-85		mA
		$V_O = 5.25$ V	45	85		mA
R_{IN}	Input resistance	$V_{CC} = 0$ or 5.25 V, -12 V $\leq V_I \leq 12$ V	6	30		k Ω

NOTE 4: If the inputs are left unconnected, receivers one and two interpret this as a high-level input and receiver three interprets this as a low-level input so that all outputs are at the high level.

receiver switching characteristics over recommended conditions (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PHL}	Propagation delay time, high-to-low level output	$R_L = 2$ k Ω , $C_L = 15$ pF, See Figure 6		30	75	ns
t_{PLH}	Propagation delay time, low-to-high level output			30	75	ns
t_r	Rise time			15	30	ns
t_f	Fall time			15	30	ns
$t_{SK(P)}$	Pulse skew $ t_{PLH} - t_{PHL} $				20	ns
t_{PZL}	Receiver output enable time to low-level output	$C_L = 50$ pF, See Figure 7		35	100	ns
t_{PZH}	Receiver output enable time to high-level output			35	100	ns
t_{PLZ}	Receiver output disable time from low-level output			20	100	ns
t_{PHZ}	Receiver output disable time from high-level output			20	100	ns
t_{PZL}	Receiver output enable time to low-level output			12	25	μ s
t_{PZH}	Receiver output enable time to high-level output			12	25	μ s
t_{PLZ}	Receiver output disable time from low-level output			25	100	ns
t_{PHZ}	Receiver output disable time from high-level output			125	400	ns

PARAMETER MEASUREMENT INFORMATION

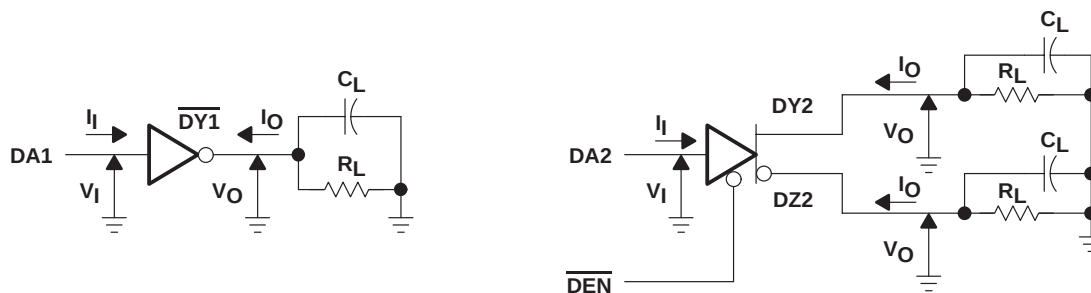

NOTE A: $C_L = 50 \text{ pF}$

Figure 1. Single-Ended Driver DC Parameter Test Circuits



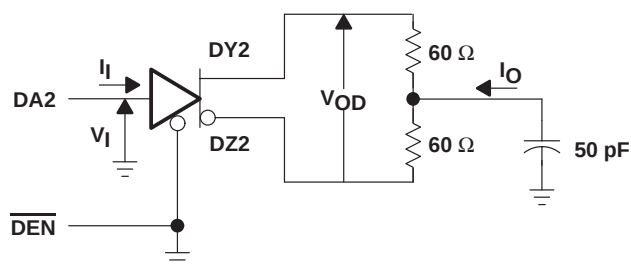


Figure 2. Differential Driver DC Parameter Test Circuit

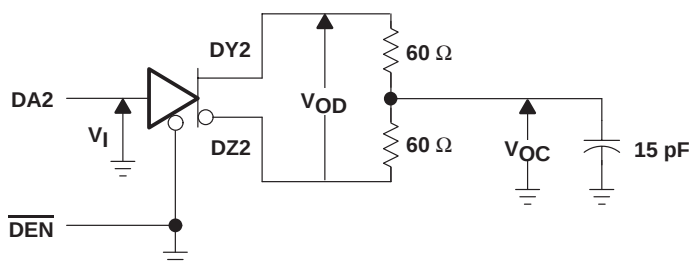

TEST CIRCUIT

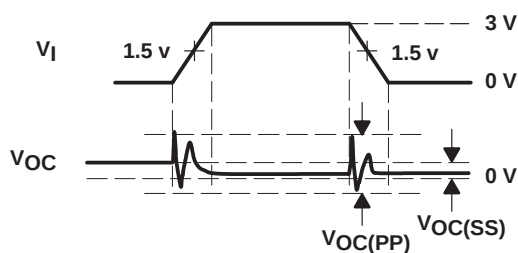


VOLTAGE WAVEFORM

NOTE A: Measured 3dB Bandwidth = 300 MHz

Figure 3. Differential Driver Common-Mode Output Voltage Test Circuit


PARAMETER MEASUREMENT INFORMATION

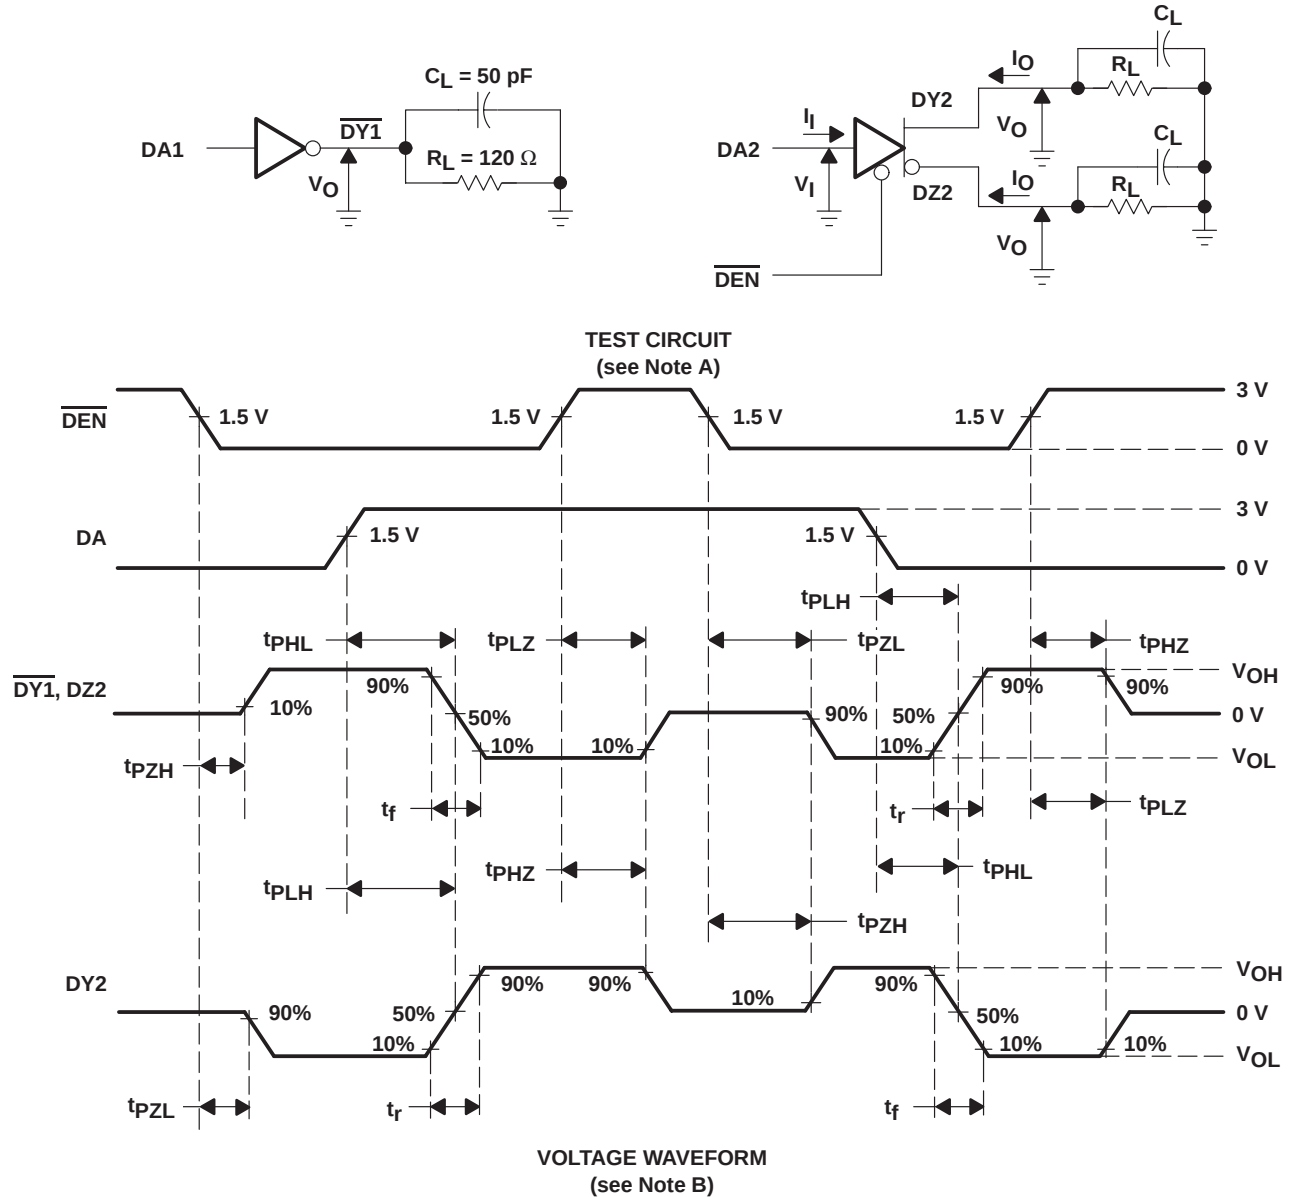

- NOTES: A. $C_L = 50 \text{ pF}$, $R_L = 120 \Omega$
B. The input waveform t_r , $t_f \leq 10 \text{ ns}$.


Figure 4. Single-Ended Driver Propagation and Transition Times Test Circuits and Waveform

PARAMETER MEASUREMENT INFORMATION

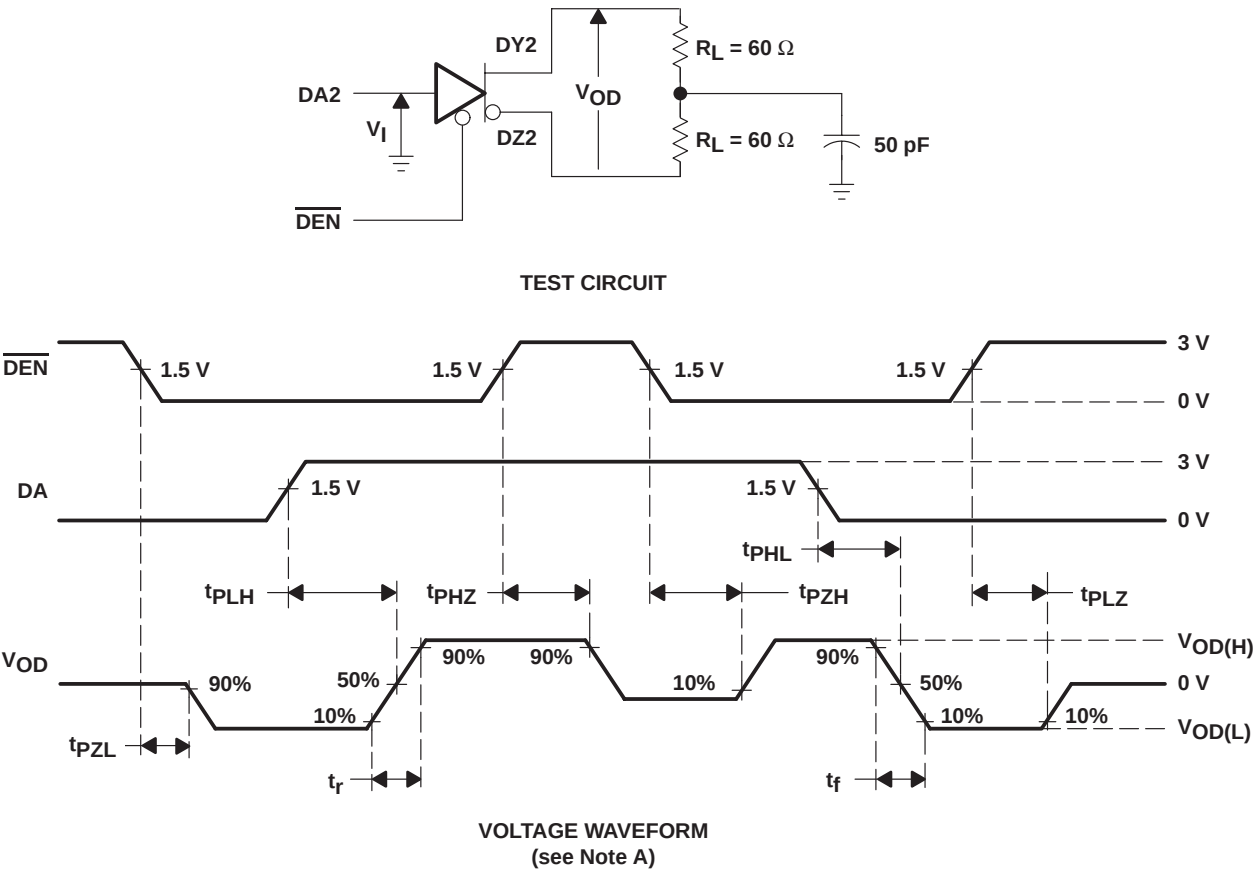

NOTE A: For the input waveform $t_r, t_f \leq 10$ ns


Figure 5. Differential Driver Propagation and Transition Times Test Circuit and Waveforms

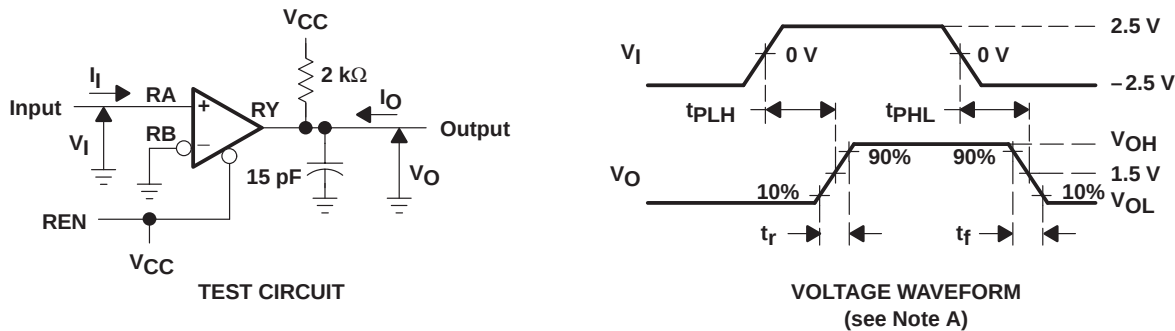


NOTE A: For the input waveform $t_r, t_f \leq 10$ ns

Figure 6. Receiver Propagation and Transition Times Test Circuit and Waveform

PARAMETER MEASUREMENT INFORMATION

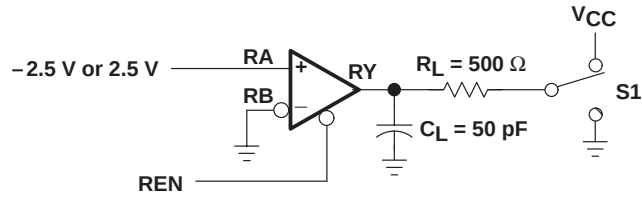

TEST CIRCUIT

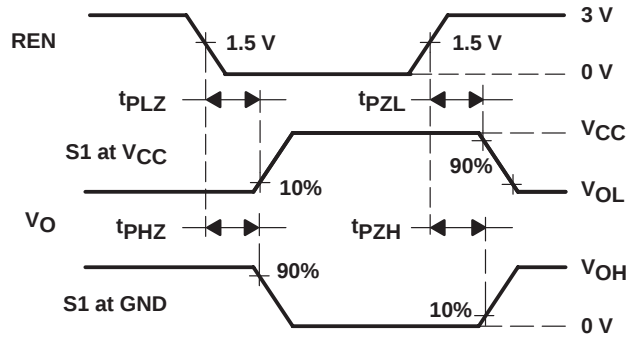


VOLTAGE WAVEFORM
(see Note A)

NOTE A: For the input waveform $t_r, t_f \leq 10\ \text{ns}$

Figure 7. Receiver Enable and Disable Test Circuit and Waveforms

APPLICATION INFORMATION

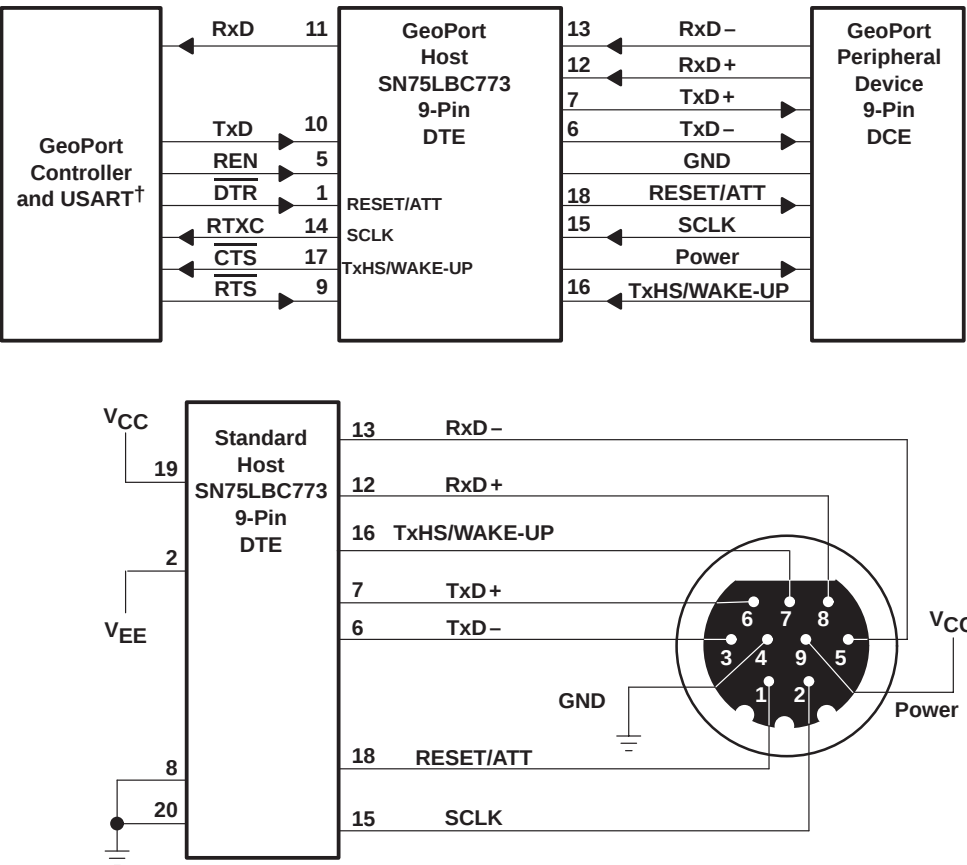

† USART = universal synchronous asynchronous receiver transmitter

Figure 8. GeoPort 9-Pin DTE Connection Application

generator characteristics

PARAMETER	TEST CONDITIONS	232/V.28		423/V.10		562		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	
V _O Output voltage magnitude	Open circuit		25	4	6		13.2	V
	3 kΩ ≤ R _L ≤ 7 kΩ	5	15	NA		3.7		V
	R _L = 450 Ω	NA		3.6		NA		V
I _{OS} Short-circuit output current	V _O = 0		100		150		60	mA
R _(OFF) Power-off source resistance	V _{CC} = 0, V _O < 2 V	300		NA		300		Ω
I _{O(OFF)} Power-off output current	V _{CC} = 0, V _O < 6 V	NA		±100		NA		μA
SR Output voltage slew rate			30	NA		4	30	V/μs
t _t Output transition time	±3.3 V to ±3.3 V	NA		NA		0.22	2.1	μs
	±3 V to ±3 V		0.04	NA		NA		ui [‡]
	10% to 90%	NA			0.3	NA		ui [‡]
V _{O(RING)} Output voltage ring		NA			10%		5%	

[‡] ui is the unit interval and is the inverse of the signaling rate (bit time).

APPLICATION INFORMATION

receiver characteristics

PARAMETER	TEST CONDITIONS	232/V.28		423/V.10		562		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	
$ V_I $ Input voltage			25		10		25	V
V_{IT} Input voltage threshold	$ V_I < 15\text{ V}$	-3	3	NA		-3	3	V
	$ V_I < 10\text{ V}$	NA		-0.2	0.2	NA		V
R_I Input resistance	$3\text{ V} < V_I < 15\text{ V}$	3	7	NA		3	7	k Ω
	$ V_I < 10\text{ V}$	NA		4		NA		k Ω

SN75LBC773
GEOPORT™ TRANSCEIVER


SLLS247C – FEBRUARY 1997 – NOVEMBER 1997

MECHANICAL INFORMATION

DW (R-PDSO-G**)

PLASTIC SMALL-OUTLINE PACKAGE

16 PIN SHOWN

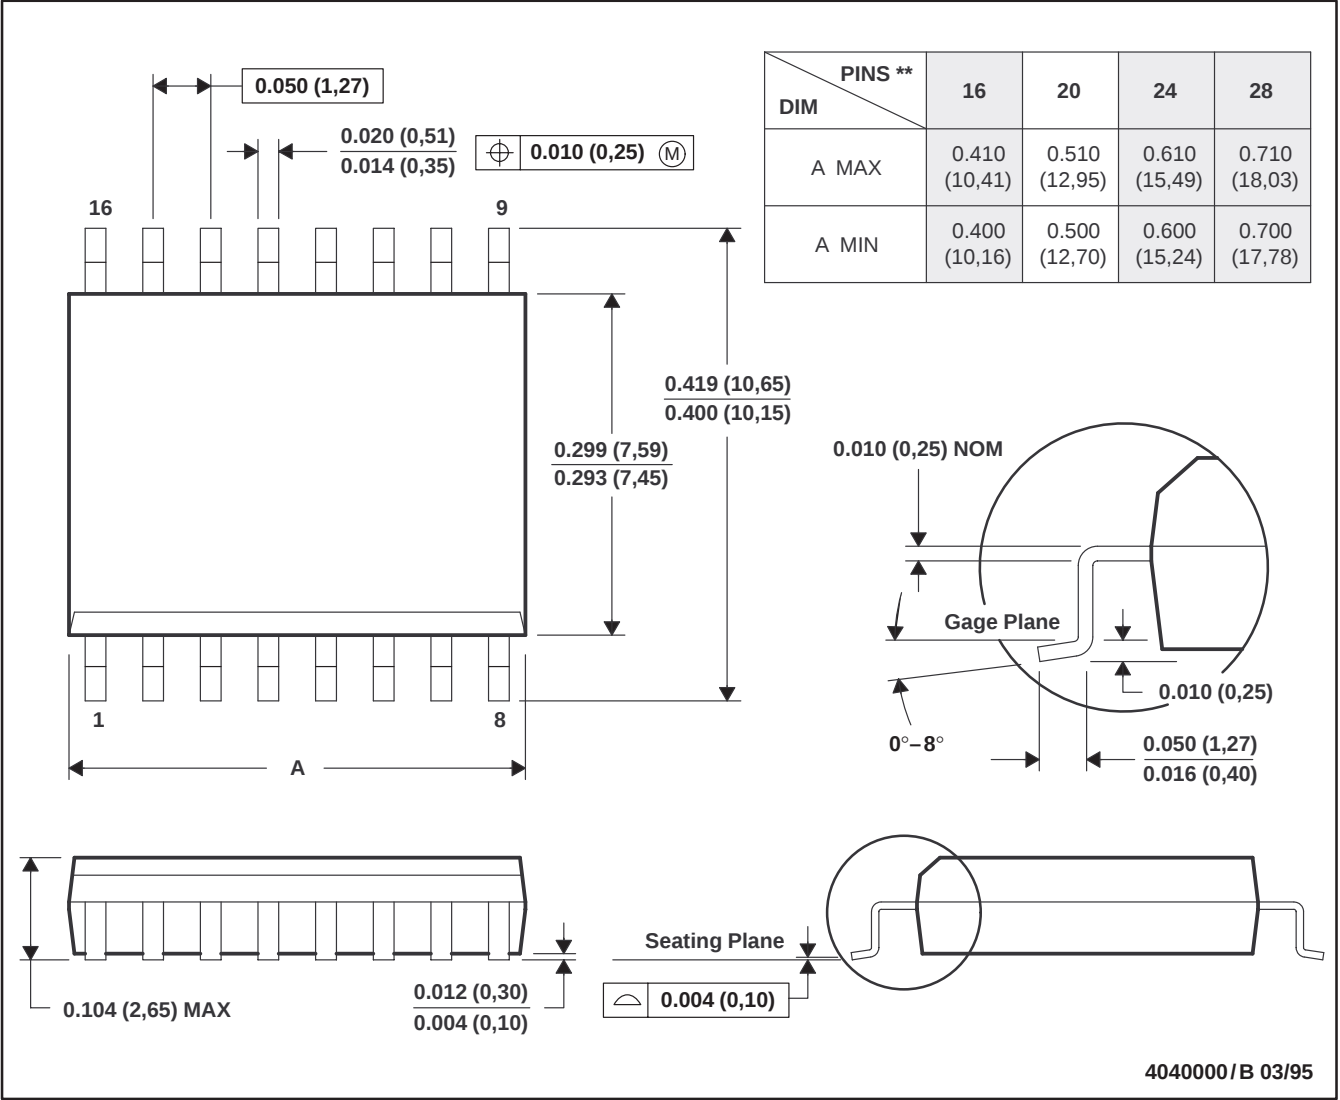

- NOTES: A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
D. Falls within JEDEC MS-013

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/Ball Finish	MSL Peak Temp ⁽³⁾
SN75LBC773DW	OBSOLETE	SOIC	DW	20		TBD	Call TI	Call TI
SN75LBC773DWR	OBSOLETE	SOIC	DW	20		TBD	Call TI	Call TI

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS) or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
		Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2005, Texas Instruments Incorporated