

TECHNICAL DATA
Datasheet 4118, Rev. C

Three-Phase MOSFET BRIDGE, With Gate Driver and Optical Isolation

DESCRIPTION: A 100 VOLT, 80 AMP, THREE PHASE MOSFET BRIDGE

ELECTRICAL CHARACTERISTICS PER MOSFET DEVICE

(T_j=25°C UNLESS OTHERWISE SPECIFIED)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
MOSFET SPECIFICATIONS					
Drain-to-Source Breakdown Voltage I _D = 500 μA, V _{GS} = 0V	BV _{DSS}	100	-	-	V
Continuous Drain Current T _C = 25 °C T _C = 90 °C	I _D	-	-	80 70	A
Pulsed Drain Current, Pulse Width limited to 1 msec	I _{DM}	-	-	200	A
Gate to Source Voltage	V _{GS}	-	-	+/-20	V
Gate- Source Leakage Current , V _{GE} = +/-20V	I _{GSS}	-	-	+/- 200	nA
Zero Gate Voltage Drain Current V _{DS} = 100 V, V _{GS} =0V T _i =25°C V _{DS} = 80 V, V _{GS} =0V T _i =125°C	I _{CSS}	-	-	1 3	mA mA
Static Drain-to-Source On Resistance, I _D = 60A, V _{GS} = 15V, T _j = 25 °C T _j = 150 °C	R _{DSon}	-	0.009 0.018	0.012 -	V
Maximum Thermal Resistance	R _{θJC}	-	-	0.65	°C/W
Maximum operating Junction Temperature	T _{jmax}	-40	-	150	°C
Maximum Storage Junction Temperature	T _{jmax}	-55	-	150	°C

SENSITRON**TECHNICAL DATA****Datasheet 4118, Rev. C**

Over-Temperature Shutdown					
Over-Temperature Shutdown	Tsd	105	110	115	°C
Over-Temperature Output	Tso		10		10mV/°C
Over-Temperature Shutdown Hysteresis			20		°C

DIODES CHARACTERISTICS					
Continuous Source Current, $T_C = 90^\circ\text{C}$	I_S	-	-	70	A
Diode Forward Voltage, $I_S = 60\text{A}$, $T_j = 25^\circ\text{C}$	V_{SD}	-		1.15	V
Diode Reverse Recovery Time ($I_S=50\text{A}$, $V_{DD}=50\text{V}$, $di/dt=100\text{ A}/\mu\text{s}$)	t_{rr}	-	70	-	nsec
Gate Driver					
Supply Voltage	VCC	10	15	20	V
Input On Current	HIN, LIN	2		5.0	mA
Opto-Isolator Logic High Input Threshold	I_{th}	-	1.6	-	mA
Input Reverse Breakdown Voltage	BV_{in}	5.0	-	-	V
Input Forward Voltage @ $I_{in} = 5\text{mA}$	V_F	-	1.5	1.7	V
Under Voltage Lockout	VCCUV	11.5	-	12.5	V
ITRIP Reference Voltage ⁽¹⁾	$I_{trip-ref}$	2.5	2.6	2.7	V
Input-to-Output Turn On Delay	t_{ond}	-	700	-	nsec
Output Turn On Rise Time	t_r	-	50	-	
Input-to-Output Turn Off Delay		-	750	-	
Output Turn Off Fall Time	t_{offd}	-	60	-	
@ VCC=50V, ID=50A, $T_C = 25$	t_f				
Input-Output Isolation Voltage	-	1500	-	-	V

(1) ITRIP Cycle-by cycle current limit is internally set to 43A peak. The set point can be lowered by connecting a resistor between $I_{trip-ref}$ and Gnd. The set point can be increased by connecting a resistor between $I_{trip-ref}$ and +5V ref

SENSITRON**TECHNICAL DATA****Datasheet 4118, Rev. C****Pin Description**


Pin Number	Function	Pin Number	Function
1	Isolated Input for High-side MOSFET of Phase A	18	NC
2	Return for Input at 1	19	+15V Input
3	NC	20	+15V Rtn (Signal Ground) ⁽³⁾
4	Isolated Input for Low-side MOSFET of Phase A	21	SD ⁽³⁾
5	Return for Input at 4	22	Fault Output ⁽³⁾
6	NC	23	Fault Clear Input ⁽³⁾
7	Isolated Input for High-side MOSFET of Phase B	24	+5V Output
8	Return for Input at 7	25	Over-Current Trip Set Point ⁽³⁾
9	NC	26	DC Bus Current Output with Total Gain of 0.06 V/A
10	Isolated Input for Low-side MOSFET of Phase B	27	Case Temperature Output with Gain of 0.010 V/°C
11	Return for Input at 10	28 & 29	Phase A Output
12	Isolated Input for High-side MOSFET of Phase C	30 & 31	Phase B Output
13	Return for Input at 12	32 & 33	Phase C Output
14	Isolated Input for Low-side MOSFET of Phase C	34 & 35	DC Bus "+VDC Return"
15	Return for Input at 14	36 & 37	DC Bus "+VDC" Input
16	NC	Case	Isolated From All Terminals
17	NC		


SENSITRON

TECHNICAL DATA

Datasheet 4118, Rev. C

Package Drawing Top View
 (All dimensions are in inches, tolerance is $\pm 0.010"$)
 (Base Plate flatness is $\pm 0.004"$ maximum)

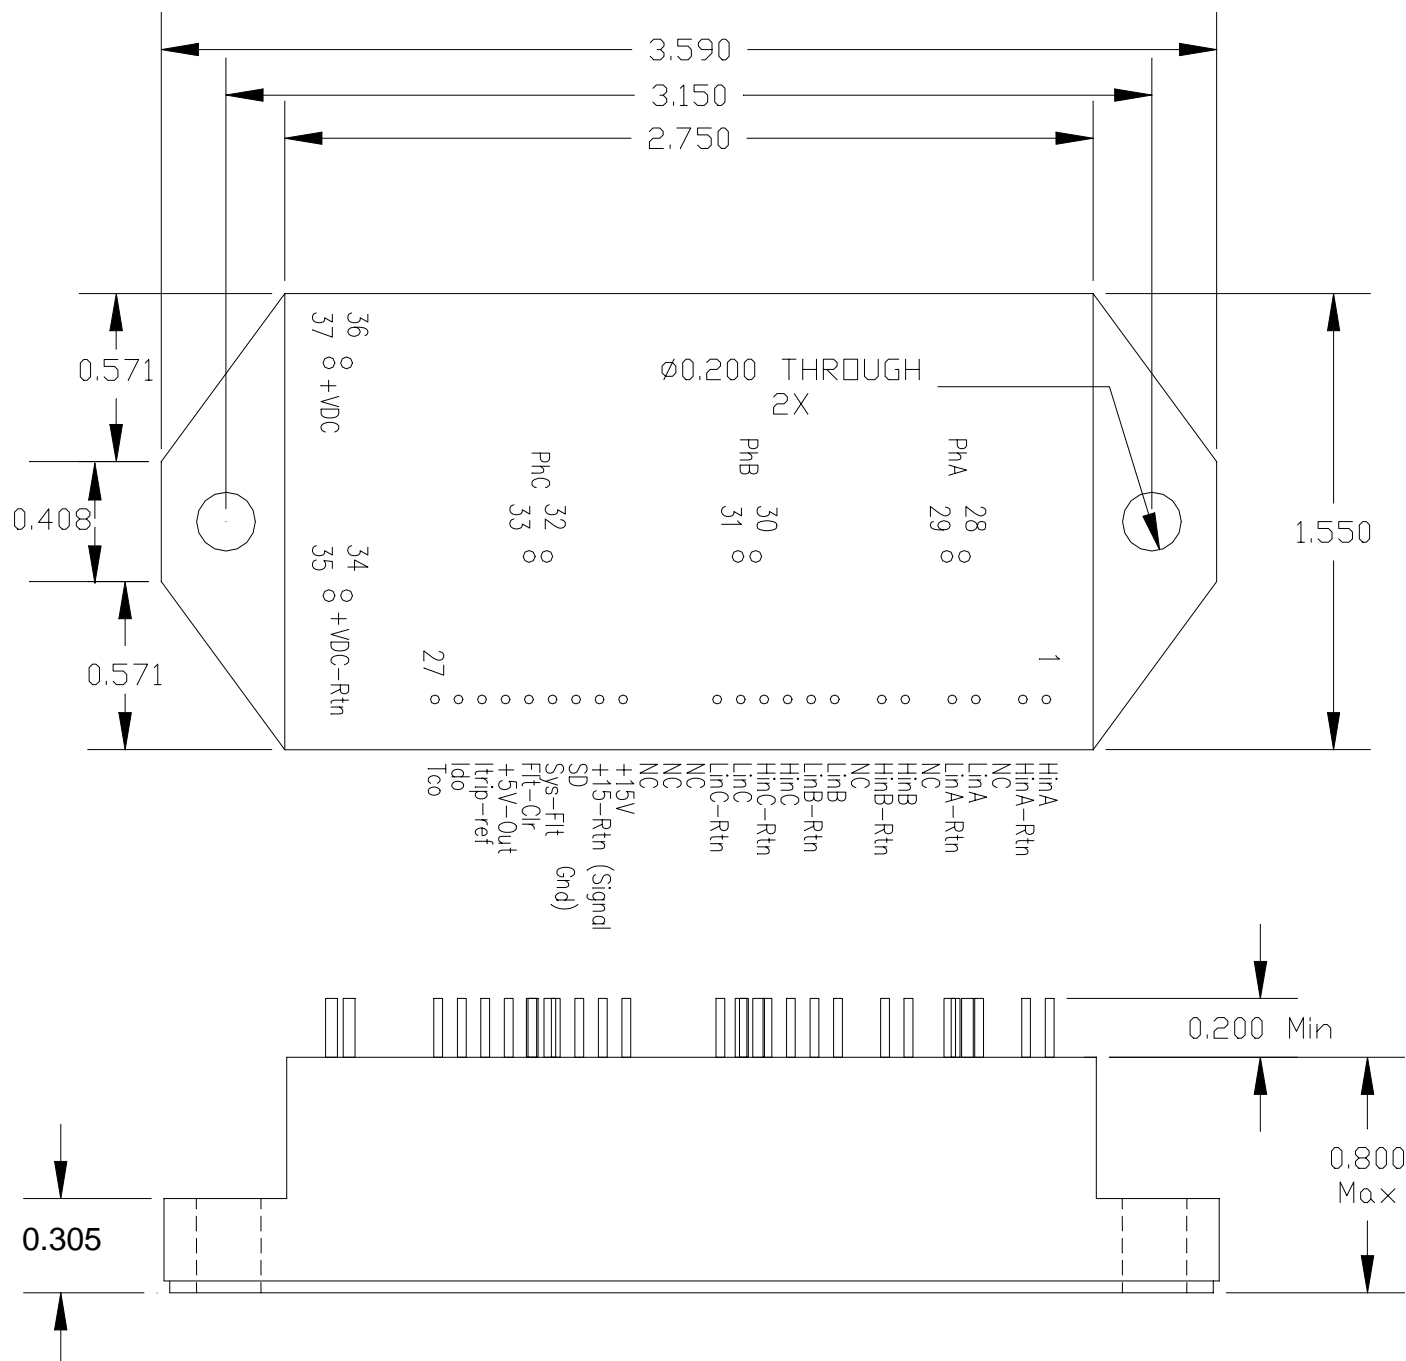

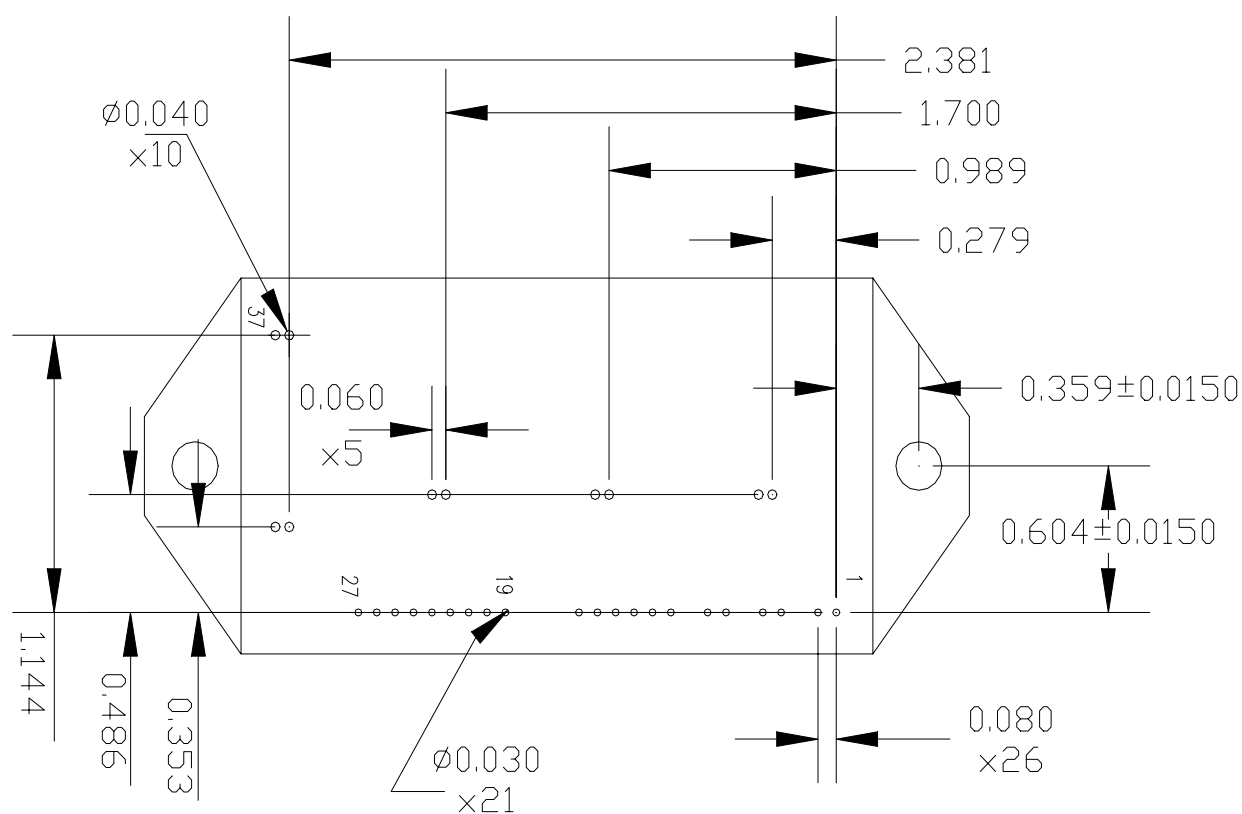SENSITRON**TECHNICAL DATA****Datasheet 4118, Rev. C****Package Pin Locations****(All dimensions are in inches; tolerance is +/- 0.005" except otherwise specified)**

SENSITRON**TECHNICAL DATA****Datasheet 4118, Rev. C**

Application Notes:**a- Shutdown Feature:**

- 1- Pin 21, SD is a dual function input/output, active low input. It is internally pulled high. As a low input, it shuts down all MOSFETs regardless of the Hin and Lin signals.
- 2- SD is also internally activated by the over-temperature shutdown, over-current limit, under-voltage shutdown, and desaturation protection.
- 3- Over-temperature shutdown, and over-current limit are not latching features.
- 4- Under-voltage shutdown is automatically reset once the VCC rises above the 12.1V threshold limit.
- 5- Desaturation shutdown is a latching feature and internally reset.
- 6- When any of the internal protection features are activated, SD is pulled down.
- 7- SD can be used to shutdown all MOSFETs by an external command. An open collector switch shall be used to pull down SD externally.
- 8- Also, SD can be used as a fault condition output. Low output at SD indicates a fault situation.

b- Fault Output Feature:

- 1- Pin 22, Flt is a dual function pin. It is internally pulled high. If pulled down, it will freeze the status of all the six MOSFETs regardless of the Hin and Lin signals
- 2- Pin 22 as an output reports desaturation protection activation. When desaturation protection is activated a low output for about 9 μ sec is reported.
- 3- If any other protection feature is activated, it will not be reported by Pin 22.

c- Fault Clear Output:

- 1- Pin 23, Flt-Clr is a fault clear input. It can be used to reset a latching fault condition, due to desaturation protection.
- 2- Pin 23 is internally pulled down. A latching fault due to desaturation can be cleared by pulling high this input.
- 3- An internal fault clear is activated after 100 μ sec delay. If desired to clear the fault earlier, this input can be used.

d- Signal Ground:

Pin 20, Signal Gnd is the signal ground for all signals at Pins 19 through 27. This ground is internally connected to the +VDC Rtn. **No external connection shall be established between Signal Gnd and +VDC Rtn.**

SENSITRON**TECHNICAL DATA****Datasheet 4118, Rev. C**

DISCLAIMER:

1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).

2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.

3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.

4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.

5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.

6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.

7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.