



SUNPOWER TECHNOLOGY CORP.  
 16F.-1, No.150, Jian 1st Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.).  
 TEL: 886-2-8226-3100 FAX: 886-2-8226-3111  
 http://www.sunpower.com.tw  
 E-mail: sunpower@sunpower.com.tw

# SPX-6200-GP1/SPX-6250-GP1

200W/250W, Six Output  
 For 1U System  
 ATX12V Power supply



180 x 100 x 40.5 mm  
 7.09 x 3.94 x 1.60 inch



## Features:

- \* Universal full range AC input with active PFC, P.F.> 0.95
- \* High efficiency and reliability
- \* Altitude during operation up to 4000M
- \* Built-in long life ball bearing fan
- \* 3.3V & 5V VRM design
- \* Over voltage, over load & short circuit, over current, over temperature protection
- \* With power good signal & PS-ON signal output
- \* Meet Intel ATX 2.01 / ATX2.31 / ATX 12V
- \* 3 years warranty

## Specification:

INPUT	Voltage	90V ~ 264VAC universal full range or 127V ~ 375VDC						
	Frequency	47 ----- 63 Hz.						
	Current	SPX-6200-GP1	<2.8A @ 100VAC input, full load condition					
		SPX-6250-GP1	<3.5A @ 100VAC input, full load condition					
	Inrush Current(TYP.)	40A@115V , 60A@230V AC input, Cold start, at 25°C ambient						
	Leakage Current	<1.5mA@264V AC input						
Power Factor	PF > 0.95							
OUTPUT	Voltage	5V	3.3V	12V	-12V	-5V	5Vsb	
	Min Load	0.3A	0A	0.2A	0A	0A	0A	
	Max Load	SPX-6200-GP1	20A	25A	12A	Peak Load 1.5A ⑥	0.5A	3A
		SPX-6250-GP1			16A			
	Output Tolerance ②	±3%	±5%	±3%	±10%	±5%	±5%	
	Ripple Noise MAX. ③	70mV	70mV	120mV	120mV	100 mV	70 mV	
Efficiency (TYP.)	83%							
Output MAX.	SPX-6200-GP1 : 3.3V & 5V max 110W, total output max 200W SPX-6250-GP1 : 3.3V & 5V max 110W, total output max 250W							
PROTECTION	Over Voltage	5.4V~6.8V	3.7V~4.1V	13.1V~14.5V	----	----	----	
	Shutdown and latch off, recover after re-start up.							
	Over current (MAX)	30A	30A	20A	----	----	----	
	Over Load & Short Circuit	When power supply over 105%~ 150% max load or short circuit acted, power supply will be shutdown and latch off, recover after re-start up.						
Over Temperature	Over 95°C ± 5°C Shutdown, recovers automatically after fault condition has been removed.							
ELEC. CHAR.	Rise time	<20mS						
	Hold up time	>16mS@230V						
	Power Good signal	Power on within 100~500ms, high level TTL signal release.						
	PS-ON signal	P/S ON: PS-ON=Low or <0.8V, P/S OFF: PS-ON=Hi or >2V						
ENVIRONMENT	Temperature ④	Operating: -10~70°C; De-rating: 50~70°C : 2.5%/°C.; Storage: -20~+85°C						
	Humidity	Operating: 20% ~ 90% RH (non condensing) ; Storage: 10% ~ 95% RH (non condensing)						
	Altitude	13124ft ( ≈ 4000m ) operating						
SAFETY	Withstand voltage	I/P-O/P:3.0KVAC, I/P-PE:1.5KVAC, 1minute						
	Isolation resistance	I/P-O/P, I/P-PE > 100MΩ/500VDC at 25°C/ 70% RH						
	Safety standard	UL 60950-1 2 <sup>nd</sup> , CSA C22.2 No. 60950-1-07 2 <sup>nd</sup> , TUV EN 60950-1:2006+A11+A1+A12+A2, IEC 60950-1:2005+A1+A2, approved						
EMC	EMI	EN 55032 CLASS B, FCC CFR 47 PART 15 CLASS B, CNS 13438 CLASS B. Compliance to EN61000-3-2 CLASS D, EN61000-3-3						
	EMS	EN 55024 : EN 61000-4-2,3,4,5,6,8,11						
OTHERS	Cooling	Forced airflow cooling with a DC fan.						
	M.T.B.F.	108.7 K hours						
	Dimension	180 x 100 x 40.5 mm (L*W*H)						
PACKING	N.W.: 1.17 KG / 1PC; 12 PCS / 2.02 CUFT / 1 CTN							

NOTE

① All measurements which not mentioned are based on 230VAC input, **output max** at ambient 25°C / 70%RH

② Output tolerance included set up voltage, line regulation and load regulation.  
 The regulation is measured between 20%-100% **max load** of each output, Total output must under **output Max**.

③ Ripple & noise are measured at 10~50°C condition and 20MHz of bandwidth by using a 10" ~15" twisted pair-wire terminated with a 0.1uF & a 10uF parallel capacitor.

④ The operating temperature shall follow the de-rating curve in spec  
 The output load may be requested for decreasing as de-rating curve in spec when low input voltage is under 100VAC

⑤ The power supply is considered a component of end-equipment. The end-equipment must be re-confirmed whether comply with EMC directives.

⑥ 33% duty cycle maximum within every 10 seconds, average output power should not exceed the **Max**. load


⑦ Start up steps : Connect AC or DC source, before you turn on the power supply. The unit can't be operated by PS-ON and GND are shorted before power supply turns on. Please contact us for different requirement.




**SUNPOWER TECHNOLOGY CORP.**  
 16F.-1, No.150, Jian 1st Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.).  
 TEL: 886-2-8226-3100 FAX: 886-2-8226-3111  
 http://www.sunpower.com.tw  
 E-mail: sunpower@sunpower.com.tw

# SPX-6200-GP1/SPX-6250-GP1

## De-rating Curve :

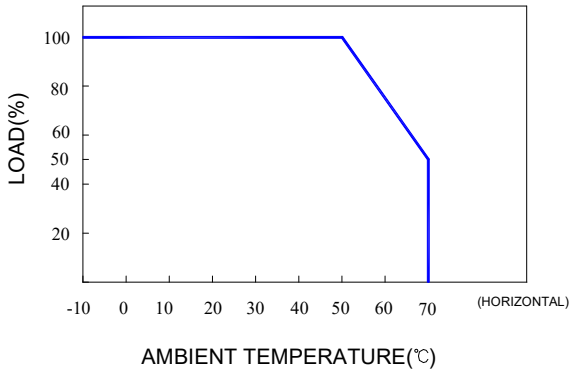

## Output De-rating Vs Input Voltage :

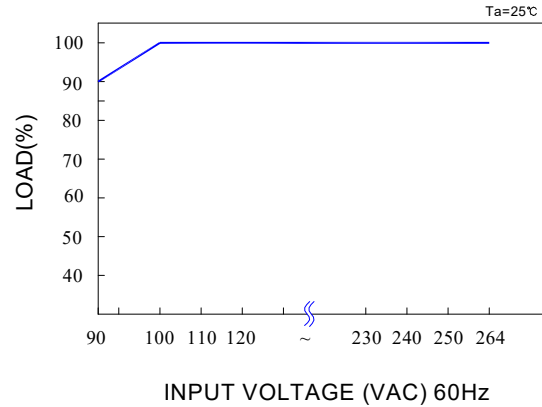

## Dimension:

(Unit: mm)

# SPX-6200-GP1/SPX-6250-GP1

