

Full Plastic Schottky Barrier Rectifiers

Using the Schottky Barrier principle with a Refractory metal capable of high temperature operation metal. The proprietary barrier technology allows for reliable operation up to 175 °C junction temperature. Typical application are in switching Mode Power Supplies such as adaptators, DC/DC converters, free-wheeling and polarity protection diodes.

Features

- * Low Forward Voltage.
- * Low Switching noise.
- * High Current Capacity
- * Guarantee Reverse Avalanche.
- * Guard-Ring for Stress Protection.
- * Low Power Loss & High efficiency.
- * 175 °C Operating Junction Temperature
- * Low Stored Charge Majority Carrier Conduction.
- * Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O



* In compliance with EU RoHS 2002/95/EC directives

SCHOTTKY BARRIER RECTIFIERS


**8 AMPERES
200 VOLTS**



ITO-220AC

MAXIMUM RATINGS

Characteristic	Symbol	SRAF08200	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	V
RMS Reverse Voltage	$V_{R(RMS)}$	140	V
Average Rectifier Forward Current Total Device (Rated V_R , $T_C=125$)	$I_{F(AV)}$	8	A
Peak Repetitive Forward Current (Rate V_R , Square Wave, 20kHz)	I_{FM}	16	A
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfwave, single phase, 60Hz)	I_{FSM}	150	A
Operating and Storage Junction Temperature Range	T_J , T_{stg}	-65 to +175	





DIM	MILLIMETERS	
	MIN	MAX
A	15.05	15.15
B	13.35	13.45
C	10.00	10.10
D	6.55	6.65
E	2.65	2.75
F		1.00
G	1.15	1.25
H	0.55	0.65
I	4.80	5.20
J	3.00	3.20
K	1.10	1.20
L	0.55	0.65
M	4.40	4.60
N	1.15	1.25
O	3.35	3.45
P	2.65	2.75
Q	3.15	3.25

THERMAL RESISTANCES

Typical Thermal Resistance junction to case	$R_{\theta j-c}$	4.0	/w
---	------------------	-----	----

ELECTRIAL CHARACTERISTICS

Characteristic	Symbol	SRAF08200	Unit
Maximum Instantaneous Forward Voltage ($I_F=8$ Amp $T_C=25$ °C) ($I_F=8$ Amp $T_C=125$ °C)	V_F	0.95 0.85	V
Maximum Instantaneous Reverse Current (Rated DC Voltage, $T_C=25$ °C) (Rated DC Voltage, $T_C=125$ °C)	I_R	0.1 20	mA



To evaluation the conduction losses use the following equation:

$$P=0.65 \times I_{F(AV)} + 0.015 \times I_{F(RMS)}^2$$

FIG-1 FORWARD CURRENT DERATING CURVE

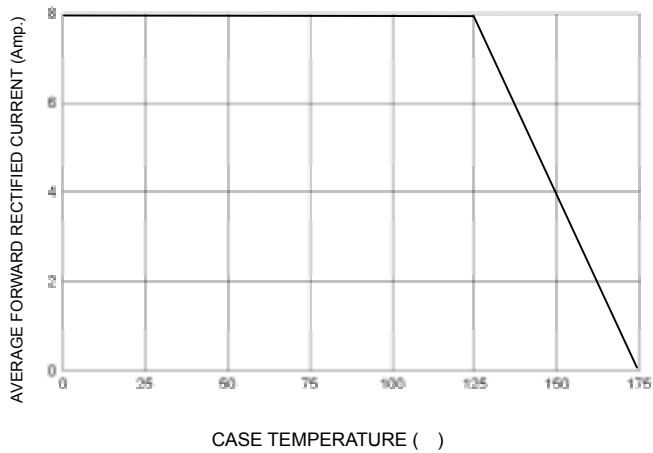


FIG-2 TYPICAL FORWARD CHARACTERISTICS

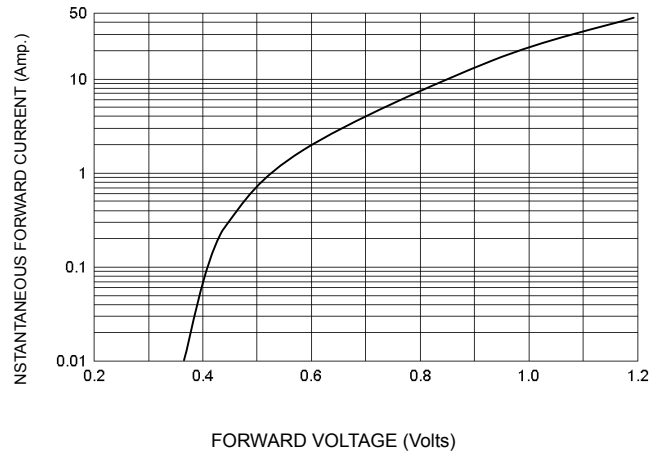


FIG-3 TYPICAL REVERSE CHARACTERISTICS

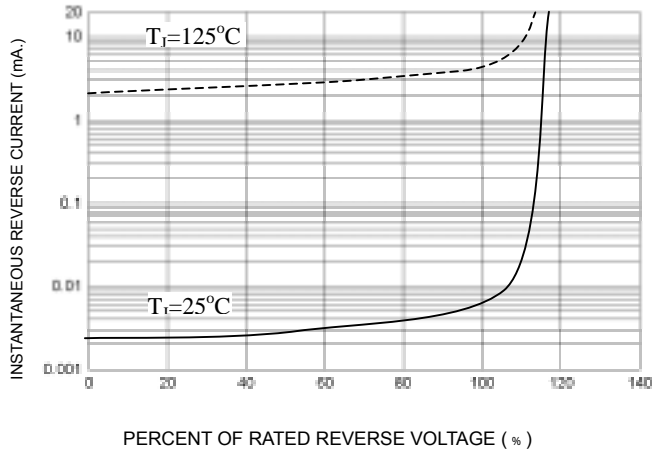


FIG-4 TYPICAL JUNCTION CAPACITANCE

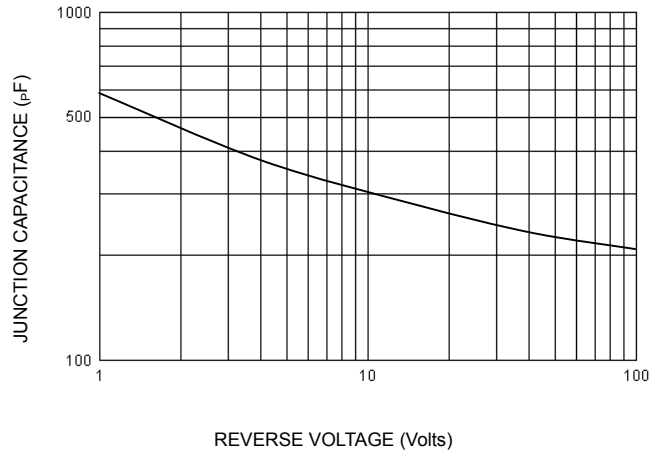


FIG-5 PEAK FORWARD SURGE CURRENT

