


High Efficiency, Fast Response, 2.0A, 18V Input Synchronous Step Down Regulator

General Description

The SY81052 is a high efficiency, synchronous step-down DC/DC converter capable of delivering 2A load current. The SY81052 operates over a wide input voltage range from 4.2V to 18V and integrates main switch and synchronous switch with very low $R_{DS(ON)}$ to minimize the conduction loss.

The SY81052 adopts the instant PWM architecture to achieve fast transient responses for high step down applications and high efficiency at light loads. In addition, it operates at pseudo-constant frequency of 500kHz to minimize the size of inductor and capacitor.

Ordering Information

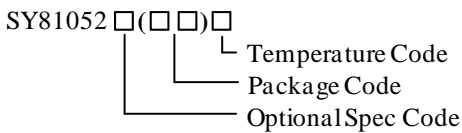

| Ordering Number | Package type | Note |
|-----------------|--------------|------|
| SY81052ABC | SOT23-6 | ---- |

Features

- Low $R_{DS(ON)}$ for Internal Switches (Top/Bottom): 130mΩ/105mΩ
- 4.2-18V Input Voltage Range
- 2A Output Current Capability
- 500kHz Switching Frequency Minimize the External Components
- Stable with 10μF C_{OUT} and 2.2μH Inductor
- Instant PWM Architecture to Achieve Fast Transient Responses
- Internal Soft-start Limits the Inrush Current
- Cycle-by-cycle Peak/Valley Current Limitation
- Hic-cup Mode Output Short Circuit Protection
- Thermal Shutdown with Auto Recovery
- Compact Package SOT23-6

Applications

- Set Top Box
- Portable TV
- DSL Modem
- LCD TV
- IP CAM
- Networking

Typical Application

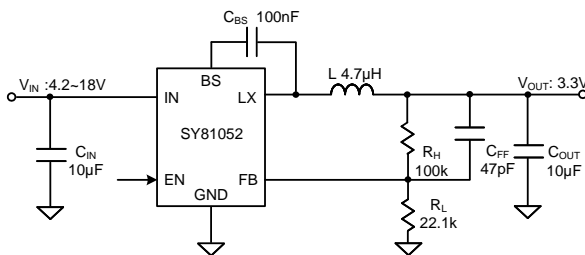


Figure1. Schematic Diagram

Inductor and C_{OUT} Selection Table

| V_{OUT} [V] | L [μH] | C_{OUT} [μF] | | |
|---------------|--------|----------------|----|----|
| | | 4.7 | 10 | 22 |
| 1.2 | 2.2 | | | ✓ |
| | 3.3 | | ☆ | ✓ |
| 3.3 | 2.2 | | ✓ | ✓ |
| | 4.7 | | ☆ | ✓ |
| 5 | 3.3 | | ✓ | ✓ |
| | 6.8 | | ☆ | ✓ |

Note: '☆' means recommended for most applications.


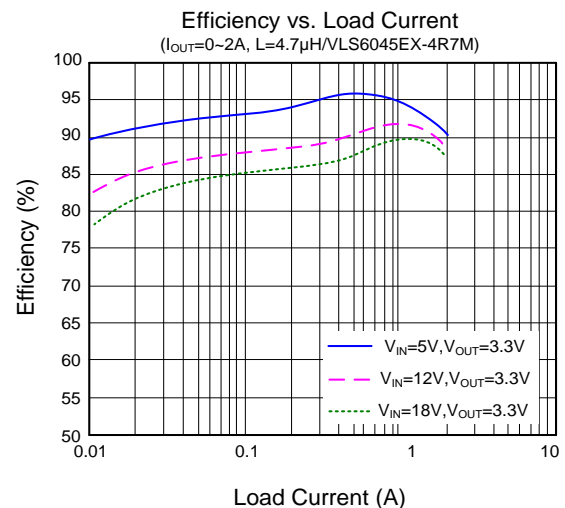


Figure2. Efficiency vs. Load Current


Pin-out (top view)

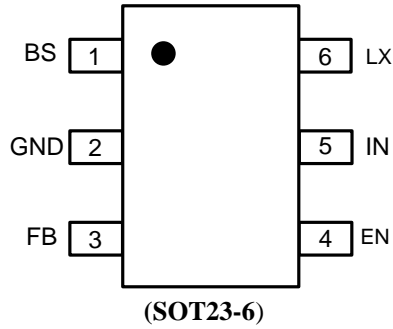

Top mark: **Q9**xyz (Device code: **Q9**, x=year code, y=week code, z=lot number code)

| Pin Name | Pin Number | Pin Description |
|----------|------------|--|
| BS | 1 | Boot-strap pin. Supply high side gate driver. Connect a 0.1μF ceramic capacitor between the BS and the LX pin. |
| GND | 2 | Power ground pin. |
| FB | 3 | Output feedback pin. Connect this pin to the center point of the output resistor divider (as shown in Figure 1) to program the output voltage: $V_{OUT}=0.6 \times (1+R_H/R_L)$. |
| EN | 4 | Enable control. Pull high to turn on. Do not leave this pin floating. |
| IN | 5 | Input pin. Decouple this pin to the GND pin with at least a 10μF ceramic capacitor. |
| LX | 6 | Inductor pin. Connect this pin to the switching node of inductor. |

Block Diagram

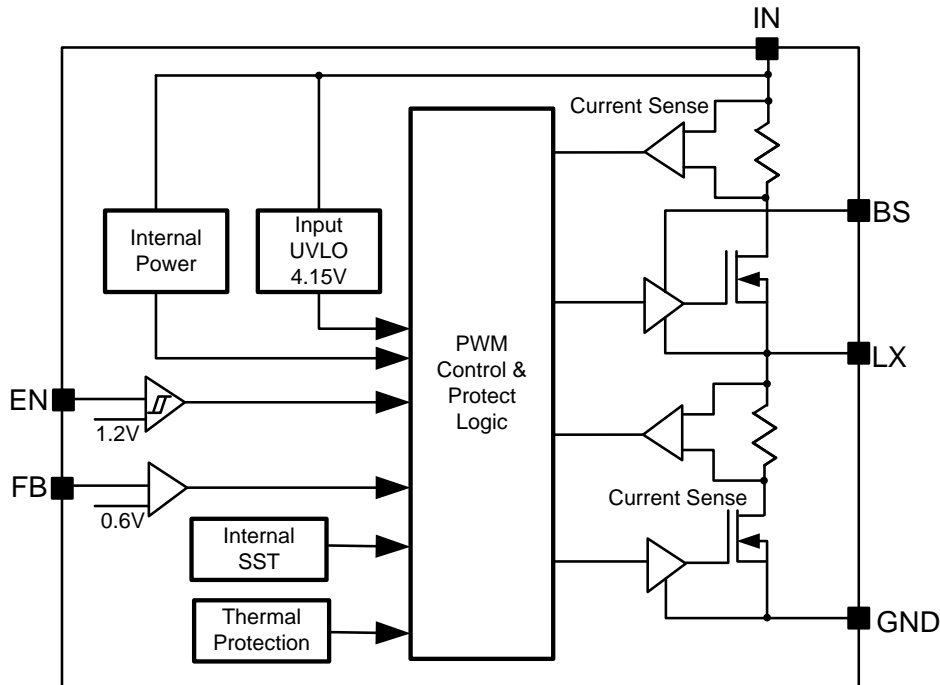



Absolute Maximum Ratings (Note 1)

| | |
|--|--------------------------|
| Supply Input Voltage | -0.3V to 19V |
| LX, EN Voltage | -0.3V to $V_{IN} + 0.3V$ |
| FB, BS-LX Voltage | -0.3V to 4V |
| Power Dissipation, P_D @ $T_A = 25^\circ C$ SOT23-6, | 1W |
| Package Thermal Resistance (Note 2) | |
| θ_{JA} | 100°C/W |
| θ_{JC} | 25°C/W |
| Junction Temperature Range | -40°C to 150°C |
| Lead Temperature (Soldering, 10 sec.) | 260°C |
| Storage Temperature Range | -65°C to 150°C |
| Dynamic LX voltage in 10ns duration (Note3) | IN+3V to GND-5V |

Recommended Operating Conditions (Note 3)

| | |
|----------------------------|----------------|
| Supply Input Voltage | 4.2V to 18V |
| Junction Temperature Range | -40°C to 125°C |
| Ambient Temperature Range | -40°C to 85°C |



Electrical Characteristics

($V_{IN} = 12V$, $V_{OUT} = 3.3V$, $L = 4.7\mu H$, $C_{OUT} = 10\mu F$, $T_A = 25^\circ C$, $I_{OUT} = 1A$ unless otherwise specified)


| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit |
|---|----------------|--|------|------|------|------------|
| Input Voltage Range | V_{IN} | | 4.2 | | 18 | V |
| Input UVLO Threshold | V_{UVLO} | | | | 4.15 | V |
| Input UVLO Hysteresis | V_{HYS} | | | 0.6 | | V |
| Quiescent Current | I_Q | $I_{OUT}=0$, $V_{FB}=V_{REF}\times 105\%$ | | 200 | | μA |
| Shutdown Current | I_{SHDN} | EN=0 | | 5 | 10 | μA |
| Feedback Reference Voltage | V_{REF} | | 591 | 600 | 609 | mV |
| FB Input Current | I_{FB} | $V_{FB}=3.3V$ | -50 | | 50 | nA |
| Top FET R_{ON} | $R_{DS(ON)1}$ | | | 130 | | m Ω |
| Bottom FET R_{ON} | $R_{DS(ON)2}$ | | | 105 | | m Ω |
| EN Rising Threshold | $V_{EN,R}$ | | 1.08 | 1.2 | 1.32 | V |
| EN Falling Threshold | $V_{EN,F}$ | | 0.9 | 1.0 | 1.1 | V |
| Min ON Time | $t_{ON,MIN}$ | | | 50 | | ns |
| Min OFF Time | $t_{OFF,MIN}$ | | | 100 | | ns |
| Turn On Delay | $t_{ON,DLY}$ | from EN high to LX start switching | | 300 | | μs |
| Soft-start Time | t_{SS} | V_{OUT} from 0 to 100% | | 1 | | ms |
| Switching Frequency | f_{SW} | $I_{OUT}=1A$ | | 500 | | kHz |
| Top FET Current Limit | $I_{LMT, TOP}$ | | 3 | | | A |
| Bottom FET Current Limit | $I_{LMT, BOT}$ | | 2 | | | A |
| Output Under Voltage Protection Threshold | V_{UVP} | | | 0.33 | | V_{REF} |
| Output UVP Delay | $t_{UVP,DLY}$ | | | 200 | | μs |
| UVP Hiccup On Time | $t_{UVP,ON}$ | | | 1.4 | | ms |
| UVP Hiccup Off Time | $t_{UVP,OFF}$ | | | 5.2 | | ms |
| Thermal Shutdown Temperature | T_{SD} | | | 150 | | $^\circ C$ |
| Thermal Shutdown Hysteresis | T_{HYS} | | | 15 | | $^\circ C$ |

Note 1: Stresses beyond the “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


Note 2: θ_{JA} is measured in the natural convection at $T_A = 25^\circ C$ on a 2OZ two-layer Silergy evaluation board. Paddle of SOT23-6 package is the case position for SY81052 θ_{JC} measurement.

Note 3: The device is not guaranteed to function outside its operating conditions.


SOT23-6 Package Outline & PCB Layout Design

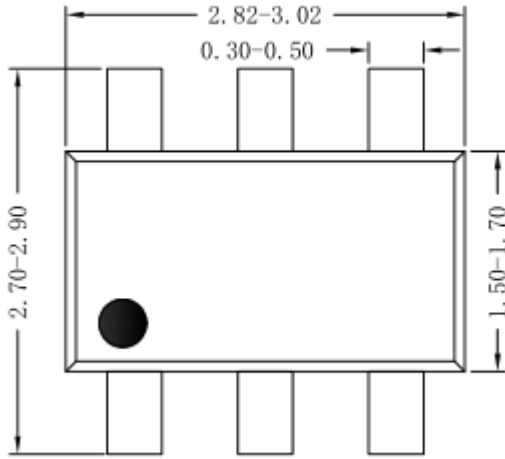


Top View

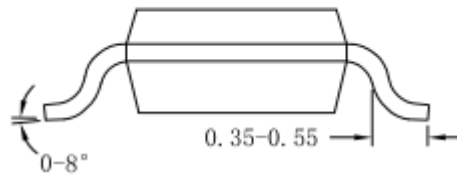

Side View

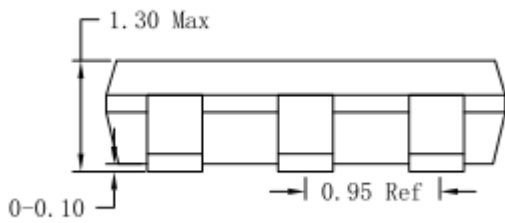

Side View

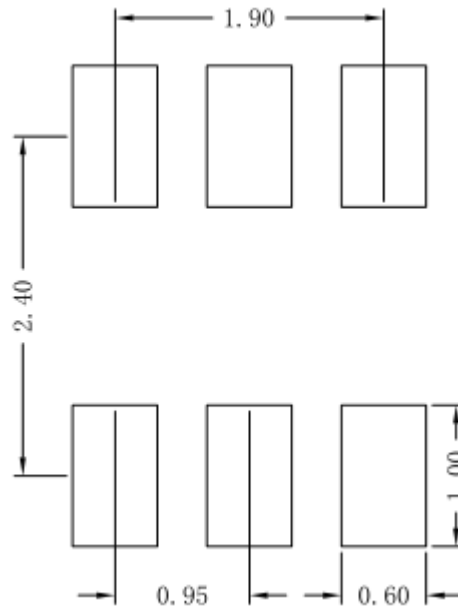


Recommended Pad Layout

Notes: All dimension in millimeter and exclude mold flash & metal burr.


Taping & Reel Specification

1. Taping orientation for package

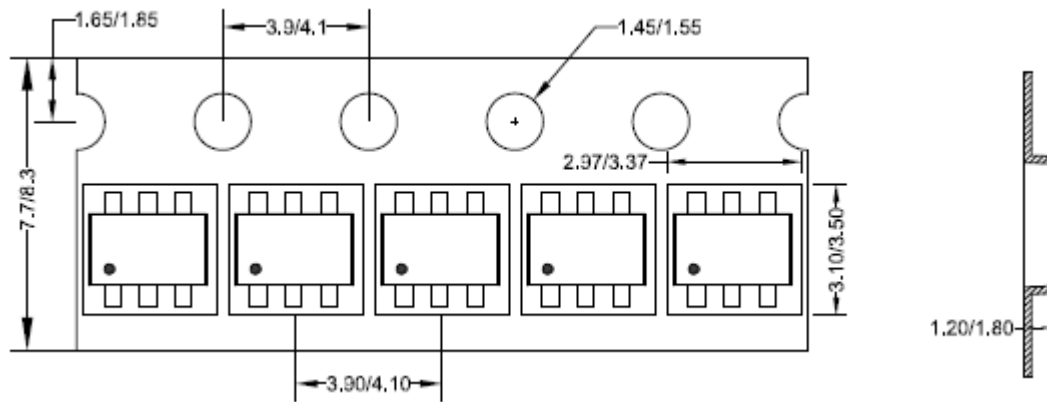

Feeding direction →

2. Carrier Tape & Reel specification for packages

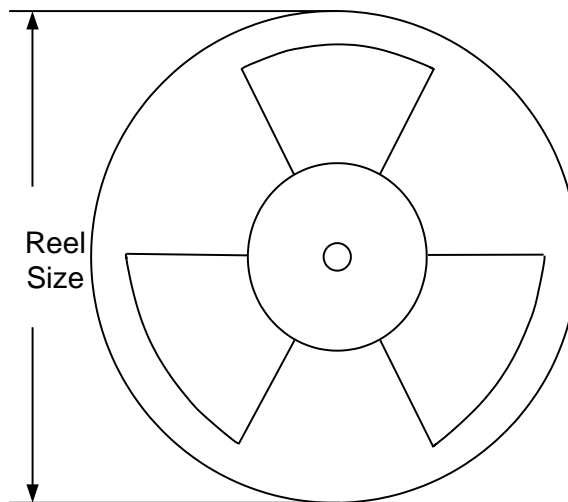

| Package type | Tape width (mm) | Pocket pitch(mm) | Reel size (Inch) | Trailer length(mm) | Leader length (mm) | Qty per reel |
|--------------|-----------------|------------------|------------------|--------------------|--------------------|--------------|
| SOT23-6 | 8 | 4 | 7" | 280 | 160 | 3000 |

3. Others: NA