

isc N-Channel MOSFET Transistor


2SK1917

DESCRIPTION

- Drain Current – $I_D = 10A$ @ $T_C = 25^\circ C$
- Drain Source Voltage-
 - : $V_{DSS} = 250V$ (Min)
- Fast Switching Speed
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS

- Switching regulators
- UPS
- General purpose power amplifier

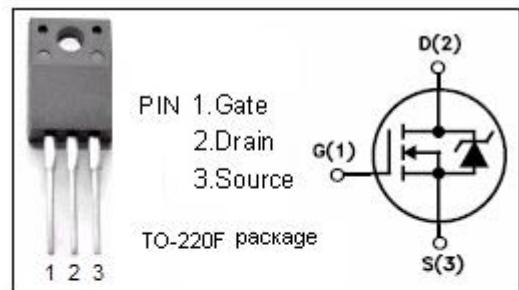


ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage ($V_{GS}=0$)	250	V
V_{GS}	Gate-Source Voltage	± 30	V
I_D	Drain Current-continuous@ $T_C=25^\circ C$	10	A
P_{tot}	Total Dissipation@ $T_C=25^\circ C$	50	W
T_j	Max. Operating Junction Temperature	150	°C
T_{stg}	Storage Temperature Range	-55~150	°C

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	2.5	°C/W
$R_{th j-a}$	Thermal Resistance, Junction to Ambient	62.5	°C/W

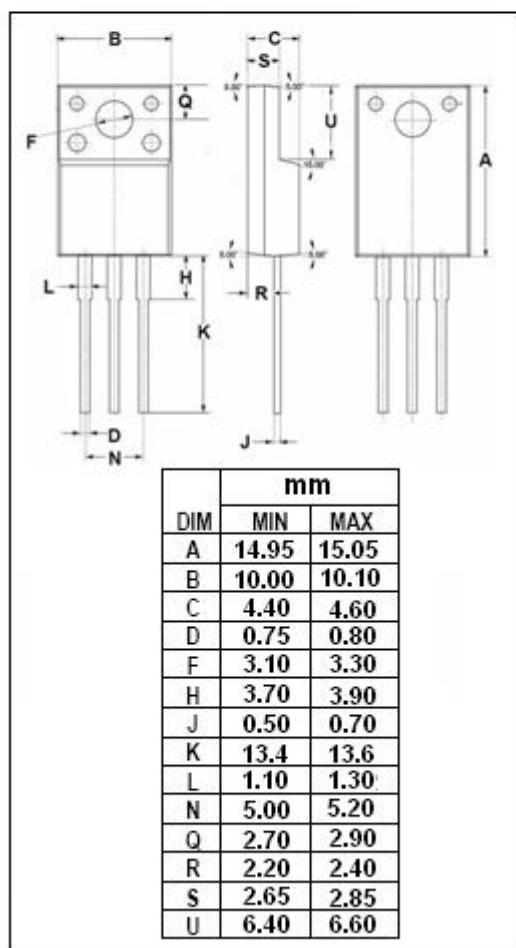

isc N-Channel Mosfet Transistor

2SK1917

• ELECTRICAL CHARACTERISTICS ($T_c=25^\circ\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	MIN	TYPE	MAX	UNIT
$V_{(\text{BR})\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{GS}= 0$; $I_D=1\text{mA}$	250			V
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{DS}= V_{GS}$; $I_D=1\text{mA}$	2.5		5	V
$R_{DS(\text{on})}$	Drain-Source On-Resistance	$V_{GS}= 10\text{V}$; $I_D= 5\text{A}$		0.3	0.4	Ω
I_{GSS}	Gate-Body Leakage Current	$V_{GS}= \pm 30\text{V}$; $V_{DS}= 0$			± 100	nA
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=250\text{V}$; $V_{GS}= 0$			500	μA
C_{iss}	Input capacitance	$V_{DS}=25\text{V}$; $V_{GS}=0\text{V}$; $f_T=1\text{MHz}$		570	860	pF
C_{rss}	Reverse transfer capacitance			70	110	
C_{oss}	Output capacitance			140	210	
t_r	Rise time	$V_{GS}=10\text{V}$; $I_D=10\text{A}$; $V_{DD}=150\text{V}$; $R_L=25\Omega$		40	60	ns
t_{on}	Turn-on time			20	30	
t_f	Fall time			50	75	
t_{off}	Turn-off time			100	150	

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.