

isc N-Channel MOSFET Transistor**2SK1985****DESCRIPTION**

- Drain Current $-I_D = 5A @ T_C = 25^\circ C$
- Drain Source Voltage-
: $V_{DSS} = 900V(\text{Min})$
- Fast Switching Speed
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS



- Switching regulators
- UPS
- General purpose power amplifier

ABSOLUTE MAXIMUM RATINGS($T_a = 25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage ($V_{GS}=0$)	900	V
V_{GS}	Gate-Source Voltage	± 30	V
I_D	Drain Current-continuous@ $T_C = 25^\circ C$	5	A
P_{tot}	Total Dissipation@ $T_C = 25^\circ C$	50	W
T_j	Max. Operating Junction Temperature	150	$^\circ C$
T_{stg}	Storage Temperature Range	-55~150	$^\circ C$

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	2.5	$^\circ C/W$
$R_{th j-a}$	Thermal Resistance, Junction to Ambient	62.5	$^\circ C/W$

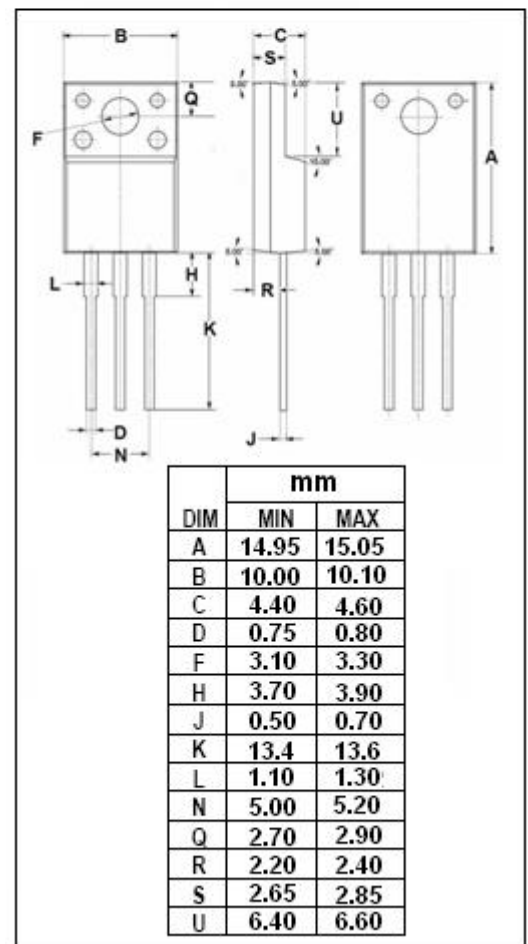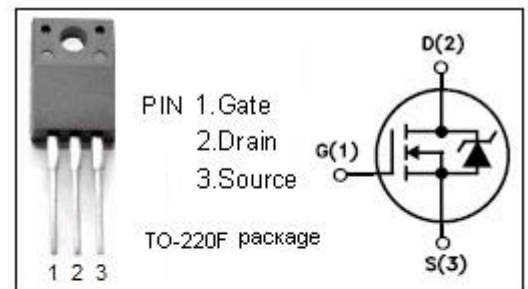

isc N-Channel Mosfet Transistor

2SK1985

• ELECTRICAL CHARACTERISTICS (TC=25°C)

SYMBOL	PARAMETER	CONDITIONS	MIN	TYPE	MAX	UNIT
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS} = 0; I_D = 1mA$	900			V
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}; I_D = 1mA$	2.5		3.5	V
$R_{DS(on)}$	Drain-Source On-Resistance	$V_{GS} = 10V; I_D = 2.5A$		2.5	2.8	Ω
I_{GSS}	Gate-Body Leakage Current	$V_{GS} = \pm 30V; V_{DS} = 0$			± 100	nA
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 900V; V_{GS} = 0$			500	μA
C_{iss}	Input capacitance	$V_{DS} = 25V; V_{GS} = 0V; f_r = 1MHz$		1300	1950	pF
C_{rss}	Reverse transfer capacitance			35	55	
C_{oss}	Output capacitance			100	150	
t_r	Rise time	$V_{GS} = 10V; I_D = 5A;$ $V_{DD} = 600V;$ $R_L = 10\Omega$		15	25	ns
$t_{d(on)}$	Turn-on delay time			20	30	
t_f	Fall time			25	40	
$t_{d(off)}$	Turn-off delay time			80	120	

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.