


## 2.9 - 3.7 GHz 1W MMIC

### FEATURES

- P<sub>-1</sub> dB: 30 dBm
- Small Signal Gain: 26 dB
- Power Added Efficiency: 25 %
- IP<sub>3</sub>: 39 dBm
- Matched to 50 Ω operation
- Bias condition: 650 mA @ 7 V

### PHOTO ENLARGEMENT



### DESCRIPTION

The TC3339 is a 2-stage PHEMT MMIC power amplifier. It is designed for use in low cost, high volume, 2.9-3.7 GHz band applications. The MMIC is matched to 50Ω operation. It provides a typical gain of 26 dB and P<sub>1dB</sub> power of more than 30 dBm. Typical bias condition is 7V at 650 mA. The MMIC is packaged in a low-cost surface-mountable plastic package.

### APPLICATIONS


- Wireless Internet Access
- Wireless Local Loop
- Two way radio

### ELECTRICAL SPECIFICATIONS (Ta = 25 °C)

SYMBOL	DESCRIPTION	MIN	TYP	MAX	UNITS
<b>FREQ</b>	Frequency Range	2.9		3.7	GHz
<b>SSG</b>	Small Signal Gain	25	26		dB
<b>GOF</b>	Small Signal Gain Flatness		±0.5		
<b>P<sub>-1</sub> dB</b>	Output Power at 1 dB Gain Compression	29	30		dBm
<b>P<sub>-3</sub> dB</b>	Output Power at 3 dB Gain Compression	30	31		dBm
<b>IP<sub>3</sub></b>	Third Order Intercept Point	37	39		dBm
<b>VSWR, IN</b>	Input VSWR		2:1		
<b>VDD</b>	Supply Voltage		7		Volt
<b>V<sub>g</sub></b>	Gate Voltage	-0.6	-1.0	-1.5	Volt
<b>IDD</b>	Current Supply Without RF		650		mA
<b>IDP<sub>-1</sub></b>	Current Supply @ P <sub>out</sub> =P <sub>-1</sub> dB		650		mA
<b>η<sub>a</sub></b>	Power Added Efficiency		25		%

## TEST CIRCUITS

### Evaluation Board Schematic

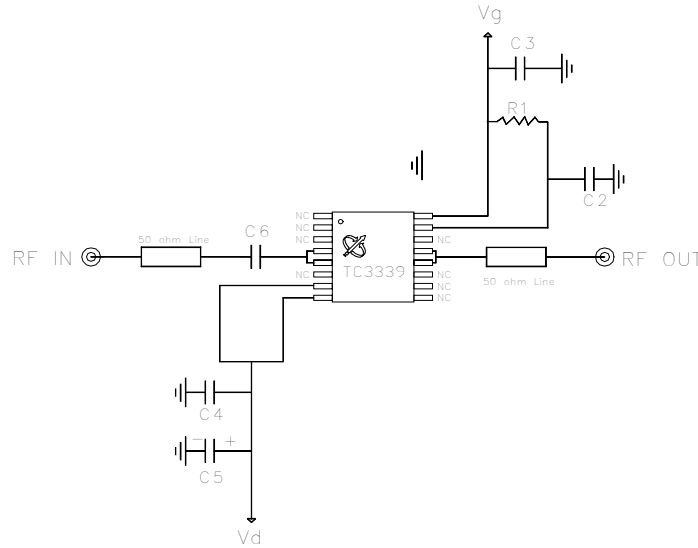


## EVALUATION BOARD

DXF file of the PCB can be downloaded from our web-site at [www.transcominc.com.tw](http://www.transcominc.com.tw)

PCB Material: RO4003  
 ER = 3.38  
 Thickness = 20 mil  
 Unit: mil

### Application Notes:


For better heat sinking and grounding, it's recommended to have the via holes beneath TC3339 filled with solder and have two screws besides TC3339 installed on the PCB area.

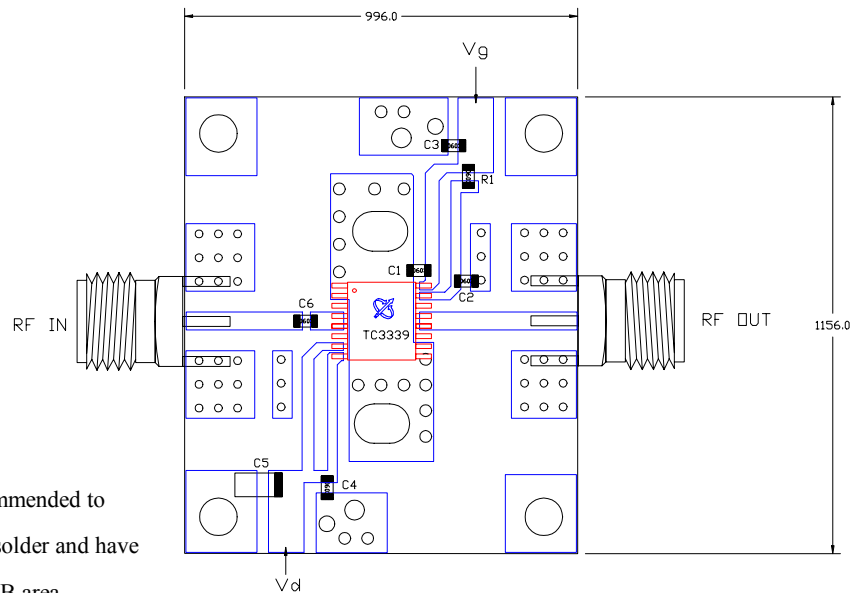

**Evaluation Board Parts List**




Part Type	Reference Designator	Description	Manufacturer	Part Number
Capacitor	C1, C2	1000pF 0603	Murata	GRM39C0G102J50V
Capacitor	C3, C4	0.1 uF 0603	Murata	GRM39Y5V104Z25V
Capacitor	C5	4.7uF Tantalum Cap.		
Capacitor	C6	1.8pF	Murata	GRM39C0G1R8C50V
Resistor	R1	200 ohm 0603		

**CONNECTION DIAGRAM AND PIN DESCRIPTIONS**

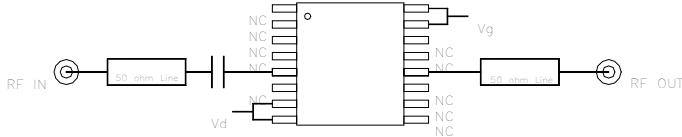

Pin #	Name	Description
4, 5	RF IN	RF input (internally DC blocked)
7, 8	V <sub>d</sub>	MMIC drain bias
15, 16	V <sub>g</sub>	MMIC gate bias
12, 13	RF OUT	RF output (internally DC blocked)
Others	NC	No Connection

PHYSICAL DIMENSIONS (Unit: inches)

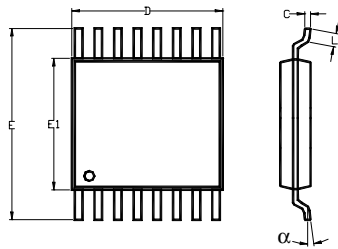

DIMENSION	MINIMUM	NOMINAL	MAXIMUM
A			0.045
A1	0.000		0.004
A2	0.031	0.039	0.041
b	0.007		0.012
C	0.004		0.008
D	0.193	0.197	0.201
E		0.252	
E1	0.169	0.173	0.177
e		0.026	
L	0.018	0.024	0.030
Y			0.004
α	0°		8°

Dimensions in inches