Spec No.	TQ3C-8EAF0-E1DEX65-00
Date	June 28, 2010

TYPE : TCG075VGLDD-C50

< 7.5 inch VGA transmissive color TFT with LED backlight and touch panel>

CONTENTS

1. Application

SPEC

- 2. Construction and outline
- 3. Mechanical specifications
- 4. Absolute maximum ratings
- 5. Electrical characteristics
- 6. Optical characteristics
- 7. Interface signals
- 8. Input timing characteristics
- 9. Backlight characteristics
- 10. Design guidance for analog touch panel
- 11. Lot number identification
- 12. Warranty
- 13. Precautions for use
- 14. Reliability test data
- 15. Outline drawing



KYOCERA CORPORATION KAGOSHIMA HAYATO PLANT LCD DIVISION

This specification is subject to change without notice. Consult Kyocera before ordering.

ſ	Original	Designed by: I	Engineering de	pt.	Confirmed by: QA dept.		
	Issue Date	Prepared	Checked	Approved	Checked	Approved	
	June 28, 2010	S. Maezuri	Y. Yamazaki	M.F.jiTani	1. Hamar	To , Sut	

🔇 КУОСЕRА

Spec No.	Part No.	Page	
TQ3C-8EAF0-E1DEX65-00	TCG075VGLDD-C50	-	

Warning

- 1. This Kyocera LCD module has been specifically designed for use only in electronic devices and industrial machines in the area of audio control, office automation, industrial control, home appliances, etc. The module should not be used in applications where the highest level of safety and reliability are required and module failure or malfunction of such module results in physical harm or loss of life, as well as enormous damage or loss. Such fields of applications include, without limitation, medical, aerospace, communications infrastructure, atomic energy control. Kyocera expressly disclaims any and all liability resulting in any way to the use of the module in such applications.
- 2. Customer agrees to indemnify, defend and hold Kyocera harmless from and against any and all actions, claims, damages, liabilities, awards, costs, and expenses, including legal expenses, resulting from or arising out of Customer's use, or sale for use, or Kyocera modules in applications.

Caution

1. Kyocera shall have the right, which Customer hereby acknowledges, to immediately scrap or destroy tooling for Kyocera modules for which no Purchase Orders have been received from the Customer in a two-year period.

TQ3C-8EAF0 EIDEX8-00 TCG073VGLDD-C50 Betevision record Date Prepared Checked Approved Checked Approved Rev.No. Date Page Descriptions Image: Second				Spec No.		Part No.		Pag
Date Designed by : Engineering dept. Confirmed by : QA dept. Prepared Checked Approved Checked Approved						0 TCG075V	GLDD-C50	
Date Prepared Checked Approved Checked Approved	Revision record							
	D	Date						
Rev.No. Date Page Descriptions Image: I			Olleckeu	Approveu	Ulleckeu	Approve	u	
Rev.No. Date Page Descriptions								
	Rev.No.	Date	Page		Descripti	ons		

Page -

1. Application

This document defines the specification of TCG075VGLDD-C50. (RoHS Compliant)

2. Construction and outline

LCD	: Transmissive color dot matrix type TFT
Backlight system	: LED
Polarizer	: Glare treatment
Additional circuit	: Timing controller, Power supply (3.3V input) (without constant current circuit for LED Backlight)
Touch panel	: Analog type(Glass/Glass)
Surface film	: Glare Anti-finger print treatment

3. Mechanical specifications

3-1. LCD

Item	Specification	Unit
Outline dimensions 1)	173(W)×133(H)×7.89(D)	mm
Active area	151.68(W)×113.76(H) (18.9cm/7.5 inch(Diagonal))	mm
Effective viewing area	153.7(W)×115.8(H)	mm
Dot format	640×(B,G,R)(W)×480(H)	dot
Dot pitch	0.079(W)×0.237(H)	mm
Base color 2)	Normally White	-
Mass	(TBD)	g

1) Projection not included. Please refer to outline for details.

2) Due to the characteristics of the LCD material, the color varies with environmental temperature.

3-2. Touch panel

	Item	Specification	Unit
Input		Radius-0.8 stylus or Finger	-
Actuation Force		(TBD)	Ν
	Striking(Finger-input) 1)	(TBD)	hits
Operating life Sliding(Stylus–input) 2)		(TBD)	characters
Transmittance		Typ.80(at full wavelength)	%
Reflectance		Typ.15(550nm)	%
Surface hardnes	8	3H or more(Pencil hardness)	-



1) Striking test cond	lition						
Testing rod	: Silicon rubber (Hardness: (TBD)°),Tip : R =(TBD)						
Testing location	: In active area						
Input voltage	: DC5V						
Load	: (TBD)N						
Cycle	: (TBD)hits/sec						
Judgment	: No defect in function						
	: No appearance defect which causes trouble to use.						
	*Dents, blurs and marks on surface film : neglected						
2) Sliding test condi	tion						
Testing rod	: Polyacetal resin, Tip : R = (TBD)						
Testing location	: In active area						
Input voltage	: DC5V						
Load	: (TBD)N						
Input length	: (TBD)mm						
Input speed	: (TBD)mm/sec						
Sliding times	: 10mm sliding (back and forth) counts as 2 times.						
Judgment	: No defect in function						
	: No appearance defect which causes trouble to use.						
	*Dents, blurs and marks on surface film : neglected						

4. Absolute maximum ratings

4-1. Electrical absolute	maximum	ratings	
--------------------------	---------	---------	--

Item		Symbol	Min.	Max.	Unit
Supply voltage		V_{DD}	0	4.0	V
Input signal voltage	1)	$V_{\rm IN}$	-0.3	6.0	V
LED forward current	2) 3)	IF	-	35	mA
Supply voltage for touch panel		V_{TP}	0	6.0	V
Input current of touch panel		ITP	0	0.5	mA

- 1) Input signal : CK, R0 ~ R5, G0 ~ G5, B0 ~ B5, H_{SYNC}, V_{SYNC}, ENAB, R/L, U/D
- 2) For each "AN-CA"
- 3) Do not apply reversed voltage.

4-2. Environmental absolute maximum ratings

Item		Symbol	Min.	Max.	Unit
Operating temperature	1)	T _{OP}	-20	70	°C
Storage temperature	2)	Тято	-30	80	°C
Operating humidity	3)	Hop	10	4)	%RH
Storage humidity	3)	$H_{\rm STO}$	10	4)	%RH
Vibration		-	5)	5)	-
Shock		-	6)	6)	-

- 1) Operating temperature means a temperature which operation shall be guaranteed. Since display performance is evaluated at 25°C, another temperature range should be confirmed.
- 2) Temp. = -30°C < 48h, Temp. = 80°C < 168h Store LCD at normal temperature/humidity. Keep them free from vibration and shock. An LCD that is kept at a low or a high temperature for a long time can be defective due to other conditions, even if the low or high temperature satisfies the standard. (Please refer to "Precautions for Use" for details.)
- 3) Non-condensing
- 4) Temp. 40°C, 85%RH Max.
 - Temp. > 40°C, Absolute humidity shall be less than 85%RH at 40°C.
- 5)

Frequency	$10\sim55~{\rm Hz}$	Acceleration value
Vibration width	0.15mm	$(0.3 \sim 9 \text{ m/s}^2)$
Interval	10-55-10	Hz 1 minutes

2 hours in each direction X, Y, Z (6 hours total) EIAJ ED-2531

 6) Acceleration: 490 m/s², Pulse width: 11 ms 3 times in each direction: ±X, ±Y, ±Z EIAJ ED-2531




5. Electrical characteristics

5-1. LCD

					Temp. = -2	0~70°C
Item	Symbol	Condition	Min.	Тур.	Max.	Unit
Supply voltage 1)	V _{DD}	-	3.0	3.3	3.6	V
Current consumption	IDD	2)	-	160	210	mA
Permissive input ripple voltage	V_{RP}	-	-	-	100	mVp-p
	VIL	"Low" level	0	-	$0.3 V_{DD}$	V
Input signal voltage 3)	VIH	"High" level	$0.7 V_{DD}$	-	V _{DD}	V

1) V_{DD} -turn-on conditions

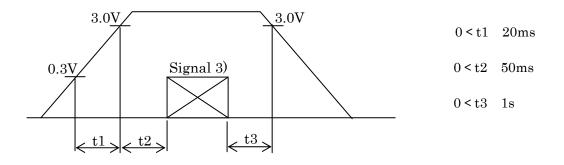

2) Display pattern:

VDD

o = 3.3V, Te	emp. = 25	°C					
	$123\ 456\ 789$	••	•••	•••	• • • •	• • 1918	1919 1920(dot)
1							
2							
3							
:							
:							
:							
479							
480							
(dot)							


3) Input signal : CK, R0 ~ R5, G0 ~ G5, B0 ~ B5, Hsync, Vsync, ENAB, R/L, U/D




5-2. Touch panel

Item	Symbol	Condition	Min.	Тур.	Max.	Unit
Supply voltage for touch panel	VTP	-	-	5.0	-	V
T	xL-xR	-	500	-	1500	Ω
Terminal resistance 1)	yU-yL	-	200	-	1000	Ω
Linearity 2)	-	-	le	less than ±2.5		%
Insulation resistance 3)	-	DC25V	50	-	-	MΩ
Chattering 4)	-	at ON/OFF	10	ess than 1	0	ms

- 1) Resistance between terminal xL and xR, or between yU and yL $\,$
- 2) Apply 5VDC to the terminal xL-xR, and measure the output voltage at terminal y when a random input is applied in the active area. Measure the difference between the output and theoretical voltages. (Measure the actual voltage at the terminal using the same method.)



- 3) Resistance between the upper and lower terminals.
- 4) Apply 5VDC to the terminal xL-xR, and measure the oscillation at terminal y when applying a random input in the active area. (Measure the oscillation at terminal x using the same method.)







6. Optical characteristics

				Meas	suring spot =	6.0mm, Te	emp. = 25°C	
Item		Symbol	Condition	Min.	Тур.	Max.	Unit	
December	Rise	τr	= =0°	-	15	-	ms	
Response time	Down	τd	= =0°	-	20	-	ms	
TT· · 1		UPPER		-	80	-	1	
Viewing angle View direction	range	LOWER		-	80	-	deg.	
÷ 6 o'cloc		LEFT	CR 5	-	80	-	1	
(Gray inversion)		ϕ right		-	80	-	deg.	
Contrast ratio		CR	= =0°	300	500	-	-	
Brightness		L	IF=13.5mA/Line	(220)	(320)	-	cd/m^2	
	D 1	x	= =0°	0.55	0.60	0.65		
	Red	У	0'	0.31	0.36	0.41		
	C	x	= =0°	0.29	0.34	0.39		
Chromaticity	Green	У	0'	0.54	0.59	0.64	-	
coordinates	ות	x	= =0°	0.10	0.15	0.20	-	
	Blue	У	0'	0.07	0.12	0.17		
	White	x	= =0°	0.27	0.32	0.37		
	White	у	0	0.29	0.34	0.39		


6-1. Definition of contrast ratio

6-2. Definition of response time

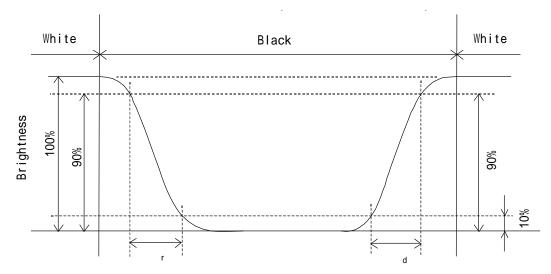

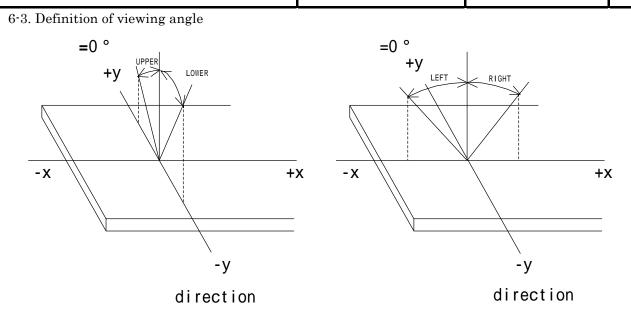

6-4. Brightness measuring points



- 1) Rating is defined on the average in the viewing area. (measured point $1 \sim 5$)
- 2) Measured 30 minutes after the LED is powered on. (Ambient temp. = 25°C)



7. Interface signals

7-1. LCD

No.	Symbol	Description	I/O	Note
1	GND	GND	-	
2	CK	Clock signal for sampling each data signal	Ι	
3	HSYNC	Horizontal synchronous signal (negative)	Ι	
4	V _{SYNC}	Vertical synchronous signal (negative)	Ι	
5	GND	GND	-	
6	R0	RED data signal (LSB)	Ι	
7	R1	RED data signal	Ι	
8	R2	RED data signal	Ι	
9	R3	RED data signal	Ι	
10	R4	RED data signal	Ι	
11	R5	RED data signal (MSB)	Ι	
12	GND	GND	-	
13	G0	GREEN data signal (LSB)	Ι	
14	G1	GREEN data signal	Ι	
15	G2	GREEN data signal	Ι	
16	G3	GREEN data signal	Ι	
17	G4	GREEN data signal	Ι	
18	G5	GREEN data signal (MSB)	Ι	
19	GND	GND	-	
20	B0	BLUE data signal (LSB)	Ι	
21	B1	BLUE data signal	Ι	
22	B2	BLUE data signal	Ι	
23	B3	BLUE data signal	Ι	
24	B4	BLUE data signal	Ι	
25	B5	BLUE data signal (MSB)	Ι	
26	GND	GND	-	
27	ENAB	Signal to settle the horizontal display position (positive)	Ι	1)
28	V _{DD}	3.3V power supply	-	
29	V _{DD}	3.3V power supply	-	
30	R/L	Horizontal display mode select signal L : Normal , H : Left / Right reverse mode	Ι	2)
31	U/D	Vertical display mode select signal H : Normal , L : Up / Down reverse mode	Ι	2)
32	NC	No connect	-	1
33	CA1	Cathode 1	-	1
34	CA2	Cathode 2	-	
35	CA3	Cathode 3	-	
36	CA4	Cathode 4	-	
37	AN1	Anode 1	-	1
38	AN2	Anode 2	-	1
39	AN3	Anode 3	-	1
40	AN4	Anode 4	-	1


LCD connector Recommended matching FFC or FPC : IMSA-9681S-40A-GF (IRISO)

: 0.5mm pitch



Spec No.	Part No.	Page
TQ3C-8EAF0-E1DEX65-00	TCG075VGLDD-C50	9

 The horizontal display start timing is settled in accordance with a rising timing of ENAB signal. In case ENAB is fixed "Low", the horizontal start timing is determined. Don't keep ENAB "High" during operation.

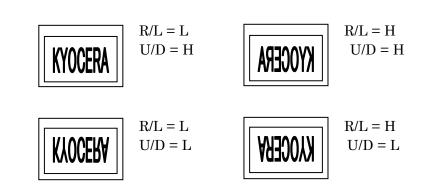

7-2. Touch panel

2)

No.	Symbol	Description
1	уU	y-Upper terminal
2	xL	x-Left terminal
3	yL	y-Lower terminal
4	xR	x-Right terminal

Touch panel side connector	:	1.25mm pitch	
Recommended matching connector	:	04FFS-SP-GB-TF(LF)(SN)	(JST)
	:	00-8370-049-000-888+	(ELCO)



8. Input timing characteristics

Max Unit Note Item Symbol Min Typ 22.66 25.1827.69 Frequency 1/Tc MHz Clock Duty ratio Tch/Tc 40 5060 % Set up time Tds 5 _ ns Data Hold time Tdh 10 -_ \mathbf{ns} 30.0 31.8μs Cycle TH Horizontal sync. 770 800 850 clock signal Pulse width $\mathbf{2}$ 96 200THp clock Cycle TV560515525line Vertical sync. signal $\mathbf{2}$ Pulse width 34TVp line Horizontal display period THd 640 clock Hsync,-Clock phase difference THc 10 Tc-10 ns Hsync-Vsync. phase difference TVh 2Tc -TH-THp-1 ns Vertical sync. signal start position TVs34line TVd 480 Vertical display period line

8-1. Timing characteristics

1) In case of lower frequency, the deterioration of the display quality, flicker etc., may occur.

8-2. Horizontal display position

	Symbol	Min	Тур	Max	Unit	Note	
Enchlo signal	Set up time	Tes	5	-	Tc-10	ns	
Enable signal	Pulse width	Тер	2	640	TH-10	clock	
H _{SYNC} – Enable signal phase difference		The	44	-	TH-664	clock	


1) When ENAB is fixed at "Low", the display starts from the data of C104(clock) as shown in 8-5.

2) The horizontal display position is determined by ENAB signal.


8-3. Vertical display position

- 1) The vertical display position (TVs) is 34th line.
- 2) ENAB signal is independent of vertical display position.

8-4. Input Data Signals and Display position on the screen

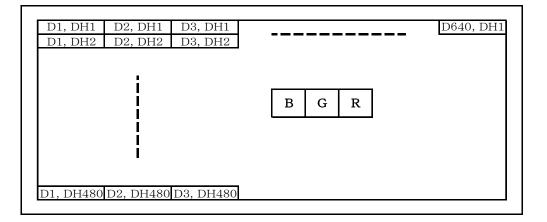

8-5. Input timing characteristics

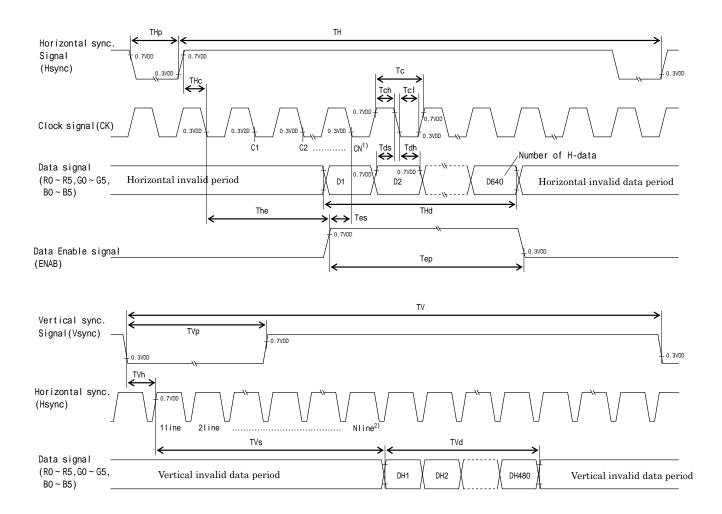

- 1) When ENAB is fixed at "Low", the display starts from the data of C104(Clock).
- 2) The vertical display position(TVs) is fixed at 34th line.

9. Backlight characteristics

Item		Symbol	Min.	Тур.	Max.	Unit	Note
Forward current	1)	IF	-	(13.5)	-	mA	Ta=-20 ~ 70°C
			-	(28.5)	(30.3)	V	IF=13.5mA, Ta=-20
Forward voltage	1)	VF	-	(27.5)	(29.3)	V	IF=13.5mA, Ta=25
			-	(26.9)	(28.7)	V	IF=13.5mA, Ta=70
Operating life time	2), 3)	Т	-	50,000	-	h	IF=13.5mA, Ta=25

1) For each "AN-CA"

2) When brightness decrease 50% of minimum brightness.The average life of a LED will decrease when the LCD is operating at higher temperatures.

- 3) Life time is estimated data.(Condition : IF=13.5mA, Ta=25 in chamber).
- 4) An input current below 5.0mA may reduce the brightness uniformity of the LED backlight. This is because the amount of light from each LED chip is different. Therefore, please evaluate carefully before finalizing the input current.

10. Design guidance for analog touch panel

10-1. Electrical (In customer's design, please remember the following considerations.)

- 1) Do not use the current regulated circuit.
- Keep the current limit with top and bottom layer. (Please refer to "Electrical absolute maximum ratings" for details.)
- 3) Analog touch panel can not sense two points touching separately.
- 4) A contact resistance is appeared at the touch point between top and bottom layer. After this resistance has stable read of the touch panel position data.
- 5) Because noise of inverter or peripheral circuits may interfere signal of touch panel itself it is necessary to design carefully in advance to avoid these noise problem.

10-2. Software

- 1) Do the "User Calibration".
- 2) "User Calibration" may be needed with long term using. Include "User Calibration" menu in your software.
- 3) When drawing a line with a stylus, there may be a slight discontinuity when the stylus passes over a spacer-dot. If necessary, please provide a compensation feature within your software.

10-3. Mounting on display and housing bezel

- 1) Do not use an adhesive tape to bond it on the front of touch panel and hang it to the housing bezel.
- 2) This touch panel has an airtight but not watertight structure. Please not to use it for the applications requiring watertight or under the environments occurred condensation. If it is expected to be exposed to the environments that vapor, moisture or other liquids may seep inside a bezel, please be sure to take some measurements for drip-proof or waterproof by using sealing materials on the bezel.
- 3) Please mount the touch panel so that it does not move or slide relative to the LCD, even when vibration or shock is applied and even when high humidity or high temperature may weaken the mounting adhesive.



11. Lot number identification

The lot number shall be indicated on the back of the backlight case of each LCD.

 $\begin{array}{ccccccc} TCG075VGLDD \text{-} C50 & - \square & - \square & - \square & MADE IN \\ & \downarrow \downarrow & \downarrow & \downarrow & & \downarrow \\ & 1 & 2 & 3 & 4 & 5 \end{array}$

- No1. No5. above indicate
 - 1. Year code
 - 2. Month code
 - 3. Date
 - 4. Version Number
 - 5. Country of origin (Japan or China)

Year	2010	2011	2012	2013	2014	2015
Code	0	1	2	3	4	5

Month	Jan.	Feb.	Mar.	Apr.	May	Jun.
Code	1	2	3	4	5	6

Month	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
Code	7	8	9	Х	Y	Z

12. Warranty

12-1. Incoming inspection

Please inspect the LCD within one month after your receipt.

12-2. Production warranty

Kyocera warrants its LCD's for a period of 12 months from the ship date. Kyocera shall, by mutual agreement, replace or re-work defective LCD's that are shown to be Kyocera's responsibility.



13. Precautions for use

- 13-1. Installation of the LCD
- 1) The LCD shall be installed so that there is no pressure on the LSI chips.
- 2) The LCD shall be installed flat, without twisting or bending.
- 3) Please design the housing window so that its edges are between the active area and the effective area of the LCD screen.

Must maintain a gap between inside of bezel and touch panel to avoid malfunction or electrode damage of touch panel.

4) A transparent protection sheet is attached to the touch panel. Please remove the protection film slowly before use, paying attention to static electricity.

13-2. Static electricity

- 1) Since CMOS ICs are mounted directly onto the LCD glass, protection from static electricity is required.
- 2) Workers should use body grounding. Operator should wear ground straps.

13-3. LCD operation

1) The LCD shall be operated within the limits specified. Operation at values outside of these limits may shorten life, and/or harm display images.

13-4. Storage

- The LCD shall be stored within the temperature and humidity limits specified.
 Store in a dark area, and protect the LCD from direct sunlight or fluorescent light.
- 2) Always store the LCD so that it is free from external pressure onto it.

13-5. Usage

- 1) <u>DO NOT</u> store in a high humidity environment for extended periods. Polarizer degradation bubbles, and/or peeling off of the polarizer may result.
- 2) Do not push or rub the touch panel's surface with hard to sharp objects such as knives, or the touch panel may be scratched.
- 3) When the touch panel is dirty, gently wipe the surface with a soft cloth, sometimes moistened by mild detergent or alcohol. If a hazardous chemical is dropped on the touch panel by mistake, wipe it off right away to prevent human contact.
- 4) The touch panel is made of glass. It may break when dropped, or vibrated excessively. Usually there is a film on the surface of the glass which would prevent broken glass from scattering, but nevertheless handle it carefully during assembly and treat it gently during use.
- 5) Touch panel edges are sharp, so they have a possibility of cutting your body, for example your finger. Handle the touch panel with enough care to prevent cuts. When you hold the touch panel, put on the protector, for example the gloves which have a strength enough to stand sharpness of touch panel edges.
- 6) Always keep the LCD free from condensation during testing. Condensation may permanently spot or stain the polarizer.
- 7) Do not disassemble LCD because it will result in damage.
- 8) This Kyocera LCD has been specifically designed for use in general electronic devices, but not for use in a special environment such as usage in an active gas. Hence, when the LCD is supposed to be used in a special environment, evaluate the LCD thoroughly beforehand and do not expose the LCD to chemicals such as an active gas.
- 9) Please do not use solid-base image pattern for long hours because a temporary afterimage may appear. We recommend using screen saver etc. in cases where a solid-base image pattern must be used.
- 9) Liquid crystal may leak when the LCD is broken. Be careful not to let the fluid go into your eyes and mouth. In the case the fluid touches your body; rinse it off right away with water and soap.


14. Reliability test data


Test item	Test condition	Test time	Judgement
High temp. atmosphere	80°C	240h	Display function: No defectDisplay quality: No defectCurrent consumption: No defect
Low temp. atmosphere	-30°C	240h	Display function: No defectDisplay quality: No defectCurrent consumption: No defect
High temp. humidity atmosphere	40°C 90% RH	240h	Display function: No defectDisplay quality: No defectCurrent consumption: No defect
Temp. cycle	-30°C 0.5h R.T. 0.5h 80°C 0.5h	10cycles	Display function: No defectDisplay quality: No defectCurrent consumption: No defect
High temp. operation	70°C	500h	Display function: No defectDisplay quality: No defectCurrent consumption: No defect
Point Activation 1)	Silicon rubber, Tip : R =(TBD) Hardness (TBD)° Hitting force (TBD)N Hitting speed (TBD) time/s	(TBD)	Touch panel function: No defectTerminal resistance: No defectLinearity: No defectActuation Force: No defectNo appearance defect which affects touch panelfunction.2)
Sliding 1)	Polyacetal resin, Tip : R = (TBD) Load (TBD)N Input length (TBD)mm Input speed (TBD)mm/s	(TBD) 3)	Touch panel function: No defectTerminal resistance: No defectLinearity: No defectActuation Force: No defectNo appearance defect which affects touch panelfunction.2)

1) Test in active area.

- 2) Dents, blurs and marks on surface film: neglected.
- 3) 10mm sliding (back and forth) counts as 2 times.
- 4) Temp. cycle test (Heat shock included): the LCD shall be tested after leaving it stabilize at room temperature for 2 hours after the last cycle.
- 5) An operational test was performed after the following conditions. First, the touch panel was left for a certain time under 5V voltages applied (without touch), Then it was left at room temperature (No VDC applied) for 2 hours.
- 6) Each test item uses a test LCD only once. The tested LCD is not used in any other tests.
- 7) The LCD is tested in circumstances in which there is no condensation.
- 8) The reliability test is not an out-going inspection.
- The result of the reliability test is for your reference purpose only. The reliability test is conducted only to examine the LCD's capability.



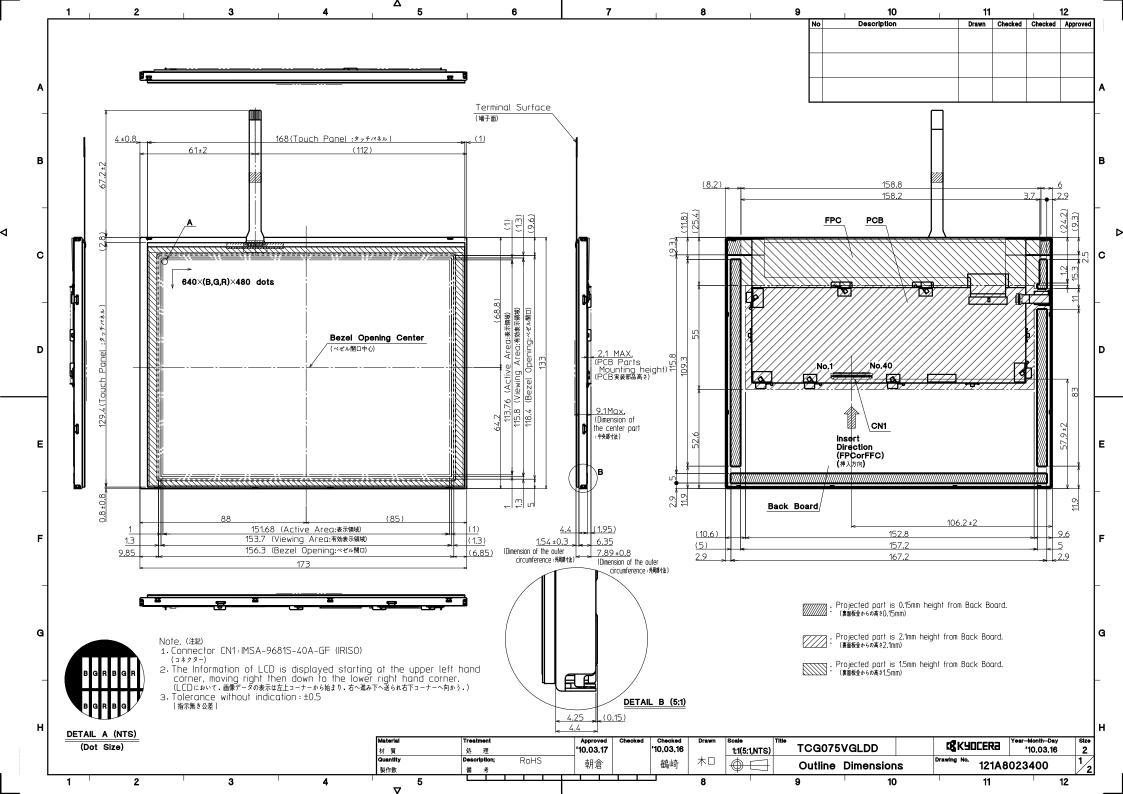

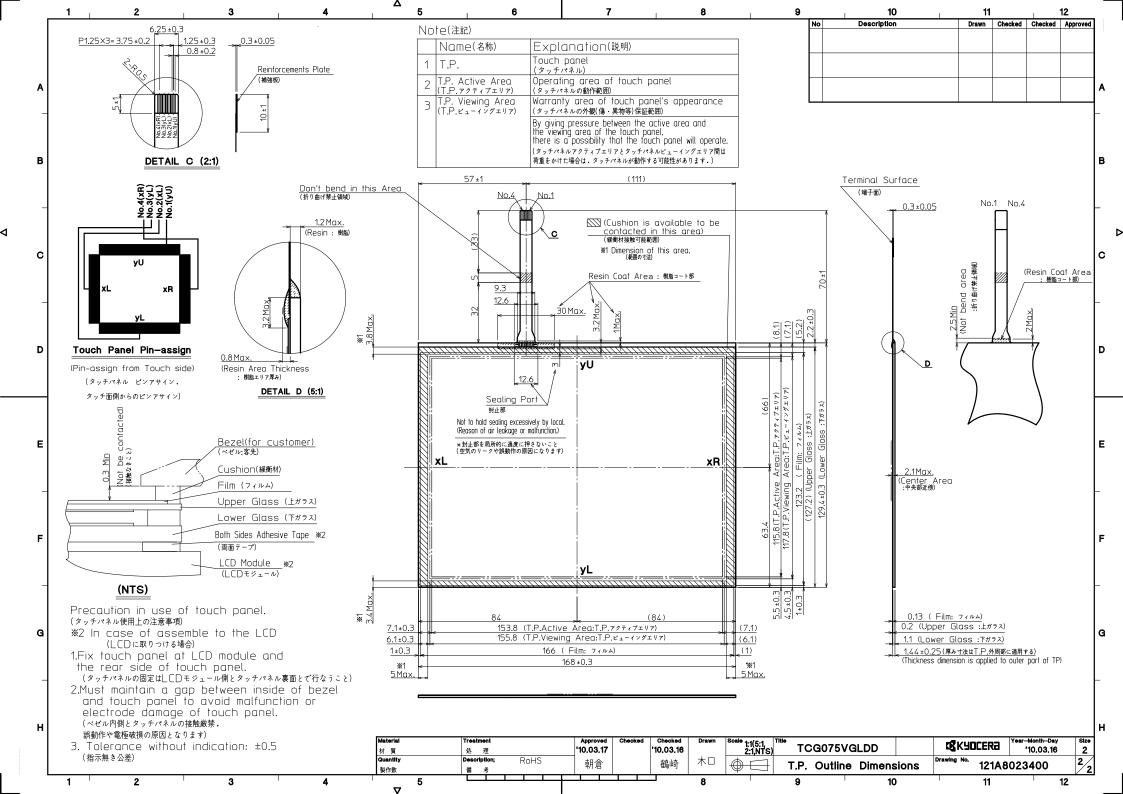

Spec No.	TQ3C-8EAF0-E2DEX65-00
Date	June 65, 2010

KYOCERA INSPECTION STANDARD

TYPE : TCG075VGLDD-C50

KYOCERA CORPORATION KAGOSHIMA HAYATO PLANT LCD DIVISION

Original	Designed by : Engineering dept.			Confirmed by : QA dept.		
Issue Date	Prepared	Checked	Approved	Checked	Approved	
June 28, 2010	S. Maezura	Y. Yamazaki	M.F.jiTani	I.Hamar S	To , Jul	



Spec No.	Part No.	Page
TQ3C-8EAF0-E2DEX65-00	TCG075VGLDD-C50	-

			Re	vision r	\mathbf{ecord}	-	
	Data			Engineering of		Confirmed by	∵QA dept.
	Date	Prepa		Checked	Approved	Checked	Approved
Rev.No.	Date	Page			Descript	ions	I
					1		

age	
-	

Visuals specification 1) Note

1) Note			Note						
General	1. Custom	per identified anomalie	s not defined within this inspection standard shall be						
General			additional standard shall be determined by mutual						
	consent								
	 This inspection standard about the image quality shall be applied to any defect within 								
	the active area and shall not be applicable to outside of the area.								
			of be applicable to outside of the area.						
		ion conditions							
	Lumin		: 500 Lux min.						
		tion distance	: 300 mm.						
	Tempe		$:25 \pm 5$						
	Directi	1	: Directly above						
Definition of	Dot defect	Bright dot defect	The dot is constantly "on" when power applied to the						
inspection item			LCD, even when all "Black" data sent to the screen.						
			Inspection tool: 5% Transparency neutral density filter.						
			Count dot: If the dot is visible through the filter.						
			Don't count dot: If the dot is not visible through the						
			filter.						
			R G B R G B R G B dot defect						
		Black dot defect	The dot is constantly "off" when power applied to the						
			LCD, even when all "White" data sent to the screen.						
		Adjacent dot	Adjacent dot defect is defined as two or more bright dot						
			defects or black dot defects.						
			RGBRGBRGB						
	External	Bubble, Scratch,	Visible operating (all pixels "Black" or "White") and non						
	inspection	Foreign particle	operating.						
		(Polarizer, Cell,							
		Backlight)							
		Appearance	Does not satisfy the value at the spec.						
		inspection							
	Others	CFL wire	Damaged to the CFL wires connector, pin, functional						
			failure or appearance failure.						
	Definition	Definition of	f circle size Definition of linear size						
	of size								
		a	_ × ₩						
			71						
		d =(a	+ b)/2						



Spec No.	Part No.	Page
TQ3C-8EAF0-E2DEX65-00	TCG075VGLDD-C50	2

2) Standard

2) Standar								
Classif	ication	Inspect	ion item	Judgement standard				
Defect	Dot	Bright dot	defect	Acceptable number	Acceptable number : 4			
(in LCD	defect			8 1 8		:5 mm	or more	
glass)		Black dot o	defect	Acceptable number		: 5		
				Black dot spacing		:5 mm	5 mm or more	
		2 dot join Bright dot defect		Acceptable number				
			Black dot defect	Acceptable number		: 3		
		3 or more o	dots join	Acceptable number		: 0		
		Total dot d	efects	Acceptable number		: 5 Ma	x	
	Others	White dot,		*				
		(Circle)		Size (mn	n)	Ac	ceptable number	
		(011010)		d	0.2	110	(Neglected)	
				0.2 < d	0.4		5	
				0.4 < d	0.5		3	
				0.5 < d			0	
						•		
	inspection	Polarizer (Scratch)					
(Defect on				Width (mm)	Length (mm)	Acceptable number	
Polarizer				W 0.1	-		(Neglected)	
between F	olarizer			0.1 < W 0.3	L	5.0	(Neglected)	
and LCD	glass)			0.0 4 11	5.0 < L		0	
				0.3 < W -			0	
		Polarizer (Bubble)					
				Size (mm)		Acceptable number		
				d 0.2		(Neglected)		
				0.2 < d	0.3	5		
				0.3 < d 0.5		3		
				0.5 < d			0	
		Foreign pa	rticle					
		(Circular shape)		Size (mm)		Acceptable number		
				d 0.2		(Neglected)		
				0.2 < d 0.4		5		
				0.4 < d	0.5	3		
			0.5 < d			0		
Foreign particle								
(Linear shape)			Width (mm) Lengt		h (mm) Acceptable number			
	Scratch		inape J	Width (mm) W 0.03			(Neglected)	
		Beratell		.0.03	W 0.03 -		(Neglected)	
				0.03 < W 0.1			3	
					4.0 < L	4.0	0	
				0.1 < W	-		(According to	
							circular shape)	
				L			ententar onapo/	



Page Spec No. Part No. TCG075VGLDD-C50 TQ3C-8EAF0-E2DEX65-00 3

Inspection item		Judgeme	nt standa	rd			
Scratch,							
Scratch, Foreign particle		= Length, D = Diameter =			r	-	
(Touch screen	Item	Width(mm)		-		Acceptable number	
portion)		d 0.03	L	20		Neglected	
portion	Scratch	0.03 < d 0.05	L	10	-	s within φ20mm	
		0.05 < d = 0.08	L	6	-	s within φ20mm	
		0.08 < d 0.1	L	4	1pcs	s within φ30mm	
	Foreign	W 0.05	Negle			Neglected	
	(line like)	0.05 < W = 0.1	L	5	2pcs	within 30mm	
	Foreign	D	0.2			Neglected	
	(circle like)	0.2 < D	0.3		2pcs	within 30mm	
		d to the visible area.					
		re foreign particle and				sly to the electrical	
	performance out	of the active area, we appr	ove of thi	s produc	et.		
Glass crack			````			Acceptable	
(Touch screen	Item	Size (n	nm)			number	
portion)			-	X	3		
		×		Λ	0		
	Corner crack				3	2 pcs	
			f in the second			/panel	
				Z	< t		
	a li		,	X	5		
	Crack in		~			9 mag	
	other area than in			Y	1.5	2 pcs /side	
	corner	2				/side	
	corner			Z	< t		
				/ .			
	Progressive	_	\sim	/		0 pcs	
	crack		\times /			(NG even 1pcs)	
	Crack	$\langle \gamma \rangle$	J			(IVG EVEN IPES)	
		\checkmark					
		• • • • • • • • • • • • • •					
		d to the visible area.					
		re foreign particle and				isly to the electrical	
	performance out	of the active area, we appro	ove of this	s product	t.		
Newton's ring	All Newton Rin	gs in the center of the so	reen mu	st be re	ejected.		
	Border around	the screen are permitted	l.				
			Ϋ́	ŕ		<i></i>	
		\bigcirc					
				<u> </u>		<u></u>	
		N G			ΟK		

