


LH03 series of products interconvertible

2SK211

Applications

For charge sensor, meter amplifier circuit, rheostat, chopper and gain controller for AGC, electronic switch.

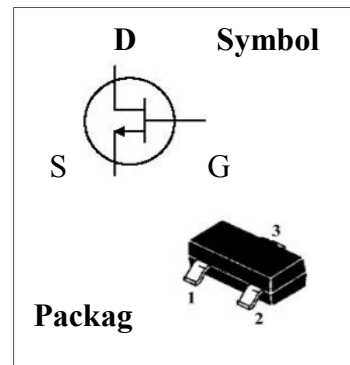

1-Drain 2-Gate 3-Source
SOT-23

Electrical characteristics (Ta=25°C)

Parameter	Symb	Conditions	min	typ	max	unit
Drain to Source Voltage	BVDS	IDS= 1uA	20			V
Gate to Drain (Source) Voltage	VGD(S)	IGS= -1uA	-20			V
Gate to Source Cut-off Voltage	VGS(off)	VDS=10V IDS=1uA	-0.3		-2.5	V
Gate to Source Reverse Current	IGSS	VDS=0V VGS=- 10V			-1.0	nA
Saturation Drain Current	IDSS	VDS=0V VGS=0V	1.2		12	mA
Forward transfer admittance	Yfs	VDS=10V VGS=0V f=1KC	2.5			mS

Classifications

Marking Rank (LH)			Y	GR	BL	
Marking Rank			O	Y	GR	
IDSS Classification (mA)			1.2~3.0	2.5~6.5	6.0~12	

YEAR : 2014

Xiao sheng Electronic & Technology CO.,LTD

Tel / Fax : 86-021-54373695 [WWW . xiao sheng -sh . Com](http://WWW.xiao sheng -sh . Com) Email : xiao sheng _sh @126 . com

No . 1021 xin zhu Rd . Min hang . Shang hai China