

TOSHIBA BIPOLAR DIGITAL INTEGRATED CIRCUIT SILICON MONOLITHIC

TD62381P, TD62381F


8CH LOW SATURATION SINK DRIVER

The TD62381P and TD62381F are comprised of eight NPN low saturation drivers. These devices are specifically designed for multiplexed digit driving of eight digit common-cathode LED and also can be employed as a sink driver for multiplexed LED displays using with the TD62785P and TD62785F at standard supply voltage, 5 V.

Applications include relay, hammer, lamp and LED display drivers.


FEATURES

- Low saturation output voltage: $V_{CE(sat)} = 0.9\text{ V (Max.)}$
@ $I_{out} = 500\text{ mA}$
- Output rating 15 V (Min.) / 500 mA (Max.)
- Input compatible with TTL and 5 V CMOS
- Low level active inputs
- Standard supply voltage
- Package type-P : DIP-18 pin
- Package type-F : SOP-18 pin

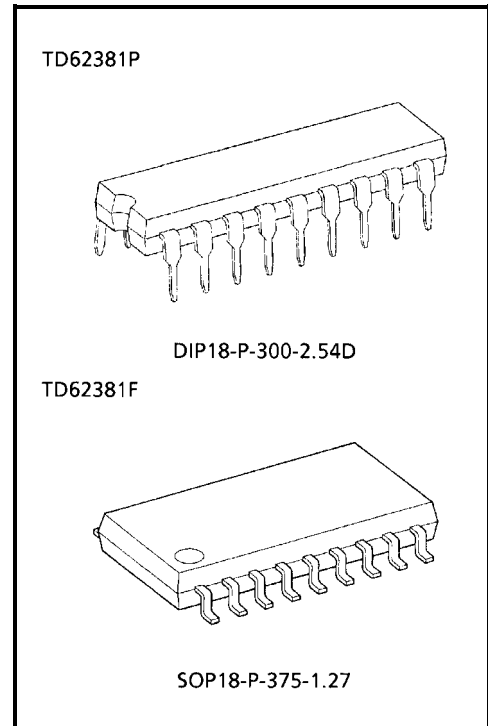


Weight
 DIP18-P-300-2.54D : 1.47 g (Typ.)
 SOP18-P-375-1.27 : 0.41 g (Typ.)

PIN CONNECTION (TOP VIEW)

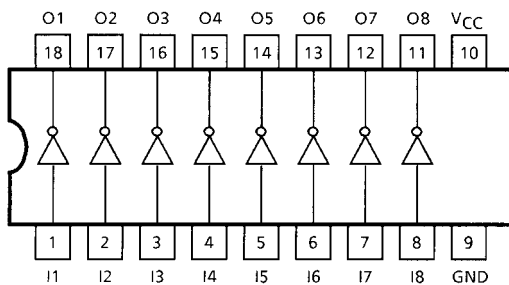

SCHEMATICS (EACH DRIVER)

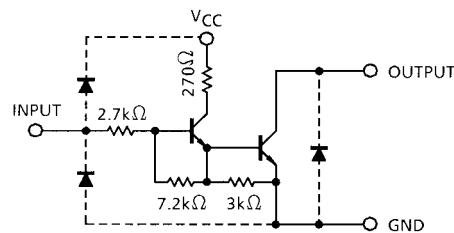

Note: The input and output parasitic diodes cannot be used as clamp diodes.

MAXIMUM RATINGS (Ta = 25°C)

| CHARACTERISTIC | SYMBOL | RATING | UNIT | |
|---------------------------|-----------------------|-----------------------|---------|---|
| Supply Voltage | V _{CC} | 7 | V | |
| Output Sustaining Voltage | V _{CE (SUS)} | 15 | V | |
| Output Current | I _{OUT} | 500 | mA / ch | |
| Input Voltage | V _{IN} | 7 | V | |
| Input Current | I _{IN} | 5 | mA | |
| Power Dissipation | P | P _D (Note) | 1.47 | W |
| | F | | 0.96 | |
| Operating Temperature | T _{opr} | -40~85 | °C | |
| Storage Temperature | T _{stg} | -55~150 | °C | |

Note: Delated above 25°C in the proportion of 11.7 mW / °C (P-Type), 7.7 mW / °C (F-Type).

RECOMMENDED OPERATING CONDITIONS (Ta = -40~85°C)


| CHARACTERISTIC | SYMBOL | CONDITION | MIN | TYP. | MAX | UNIT | | | |
|------------------------|------------------|-----------------------|-------------------------|-------------------------|-----------------|------|---------|-----|-----|
| Supply Voltage | V _{CC} | — | 4.5 | 5.0 | 5.5 | V | | | |
| Output Voltage | V _{OUT} | — | — | — | 12 | V | | | |
| Output Current | P | I _{OUT} | DC 1 Circuit, Ta = 25°C | 0 | — | 400 | mA / ch | | |
| | | | | F | 0 | — | | 400 | |
| | P | | | T _{pw} ≤ 25 ms | Duty = 10% | 0 | | — | 400 |
| | | | | 8 Circuit On | Duty = 50% | 0 | | — | 350 |
| | F | | | Ta = 85°C | Duty = 10% | 0 | | — | 400 |
| T _j = 120°C | | Duty = 50% | 0 | — | 330 | | | | |
| Input Voltage | V _{IN} | — | 0 | — | V _{CC} | V | | | |
| | Output On | V _{IN (ON)} | 2.4 | — | V _{CC} | | | | |
| | Output Off | V _{IN (OFF)} | 0 | — | 0.4 | | | | |
| Power Dissipation | P | P _D | — | — | 0.52 | W | | | |
| | F | | — | — | 0.35 | | | | |

ELECTRICAL CHARACTERISTICS (Ta = 25°C, V_{CC} = 5 V)


| CHARACTERISTIC | SYMBOL | TEST CIR-CUIT | TEST CONDITION | MIN | TYP. | MAX | UNIT |
|---------------------------|-----------------------|---------------|--|-----|------|-----|---------|
| Output Leakage Current | I _{CEX} | 1 | V _{IN} = OPEN V _{OUT} = 12 V, Ta = 85°C | — | — | 100 | μA |
| Output Saturation Voltage | V _{CE (sat)} | 2 | I _{OUT} = 500 mA | — | — | 0.9 | V |
| | | | I _{OUT} = 350 mA | — | — | 0.7 | |
| Input Current | I _{IN (ON)} | 3 | V _{CC} = 5 V, V _{IN} = 2.4 V | — | 0.4 | 0.7 | mA |
| Input Voltage (Output on) | V _{IN (ON)} | — | V _{CC} = 5 V | — | — | 2.4 | V |
| Supply Current | I _{CC} | 4 | V _{CC} = V _{IN} = 5 V | — | — | 17 | mA / ch |
| Turn-On Delay | t _{ON} | 5 | V _{OUT} = 10 V, R _L = 20 Ω C _L = 15 pF | — | 0.1 | — | μs |
| Turn-Off Delay | t _{OFF} | | | — | 1.2 | — | μs |

TEST CIRCUIT


1. I_{CEX}




2. $V_{CE(sat)}$





3. $I_{IN(ON)}$



4. I_{CC}









5. t_{ON}, t_{OFF}

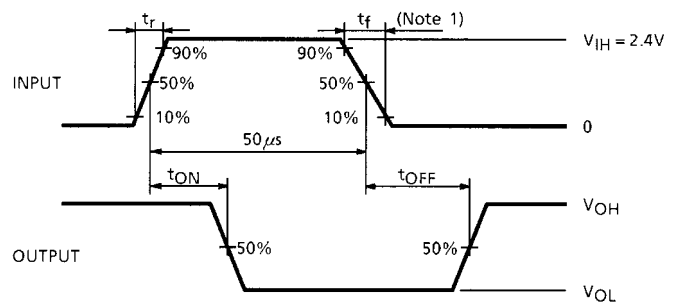
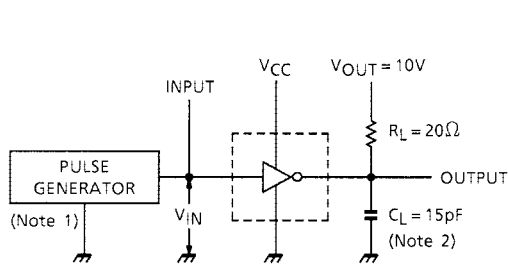


- Note 1: Pulse Width 50 μ s, Duty Cycle 10%
 Output Impedance 50 Ω , $t_r \leq 5$ ns, $t_f \leq 10$ ns
 Note 2: C_L includes probe and jig capacitance.

PRECAUTIONS for USING

This IC does not include built-in protection circuits for excess current or overvoltage. If this IC is subjected to excess current or overvoltage, it may be destroyed. Hence, the utmost care must be taken when systems which incorporate this IC are designed. Utmost care is necessary in the design of the output line, VCC, and GND line since IC may be destroyed due to short-circuit between outputs, air contamination fault, or fault by improper grounding.

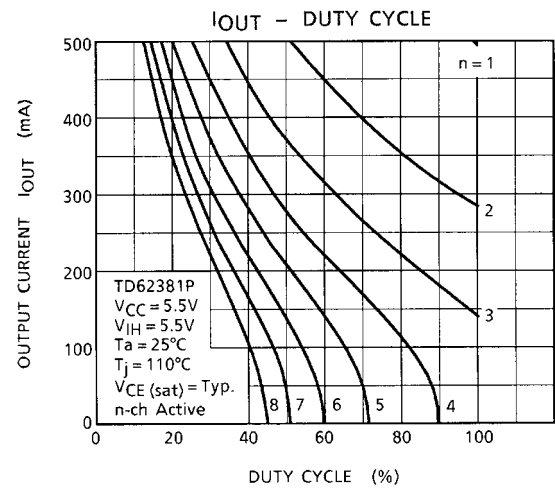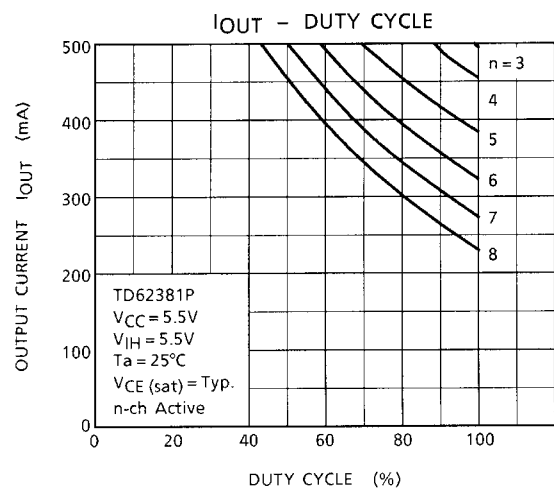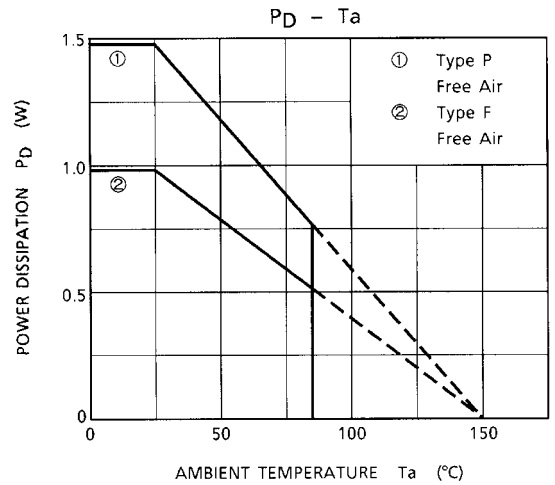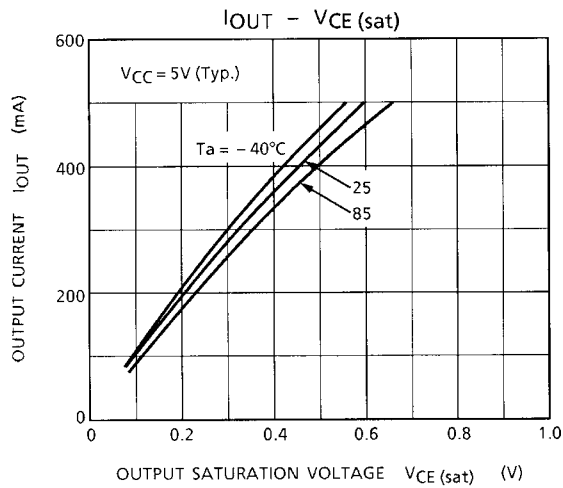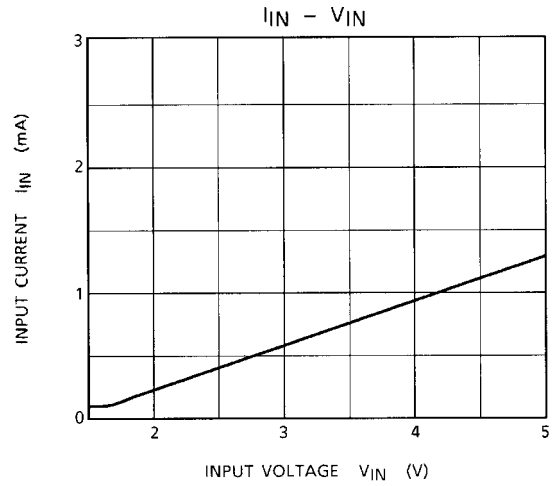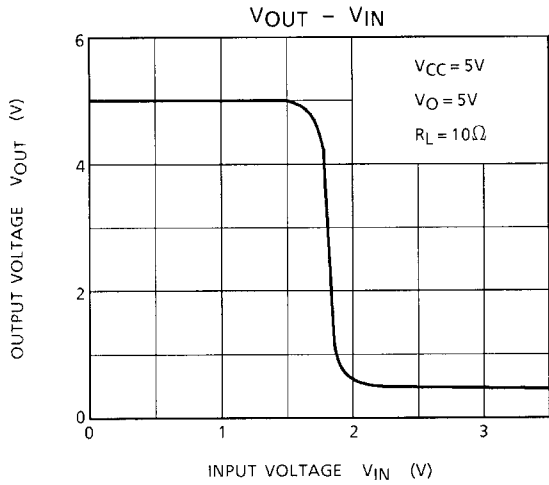


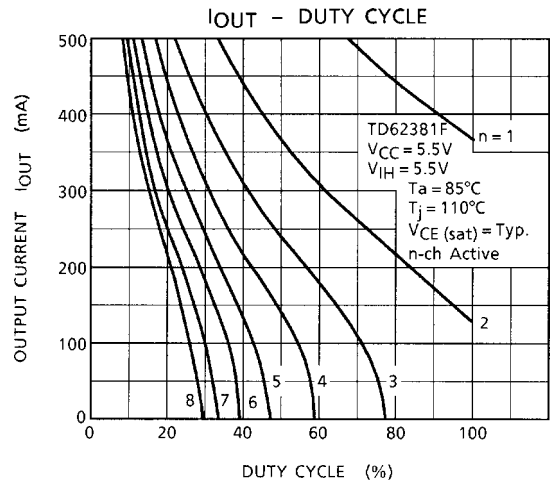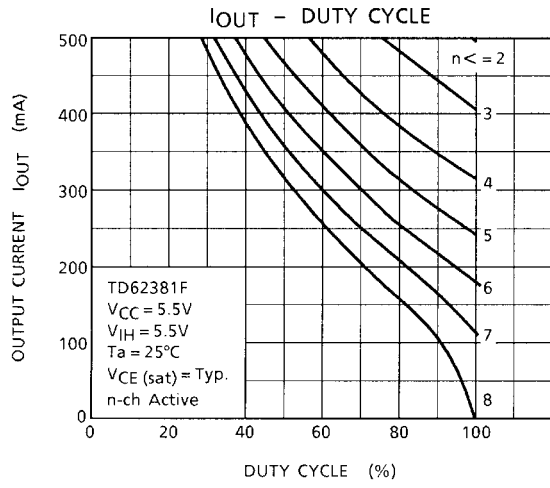

PACKAGE DIMENSIONS

DIP18-P-300-2.54D

Unit: mm



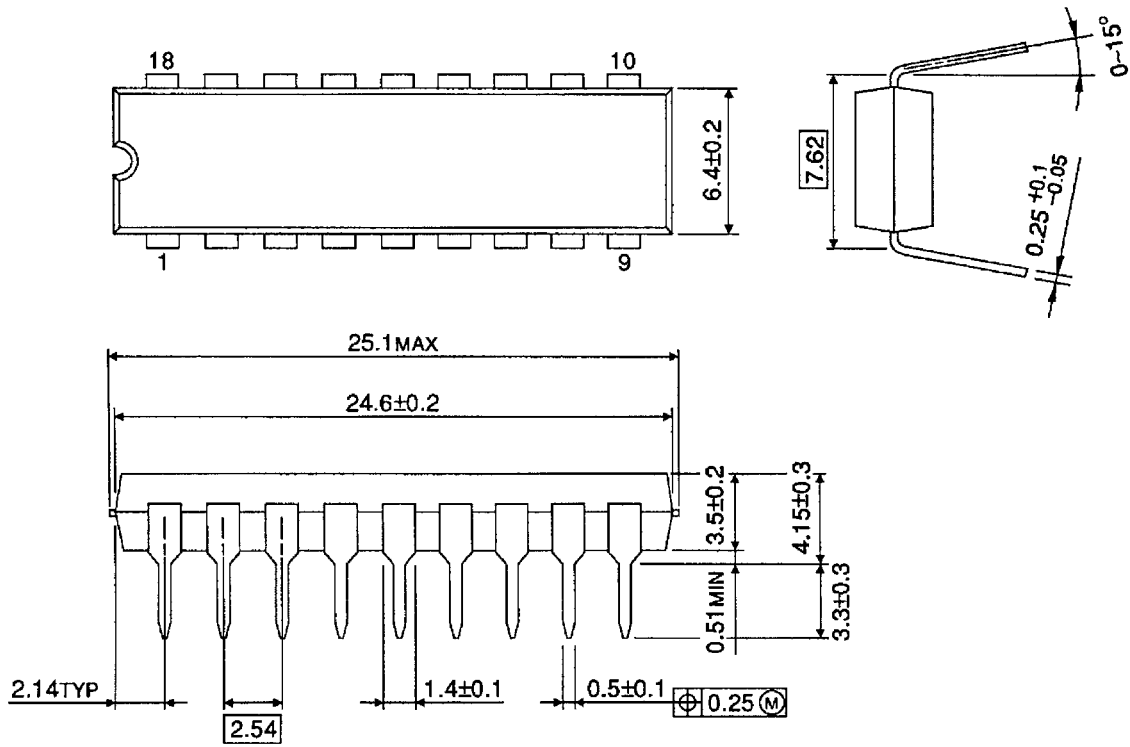


Weight: 1.47 g (Typ.)

PACKAGE DIMENSIONS

SOP18-P-375-1.27

Unit: mm

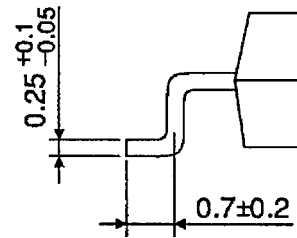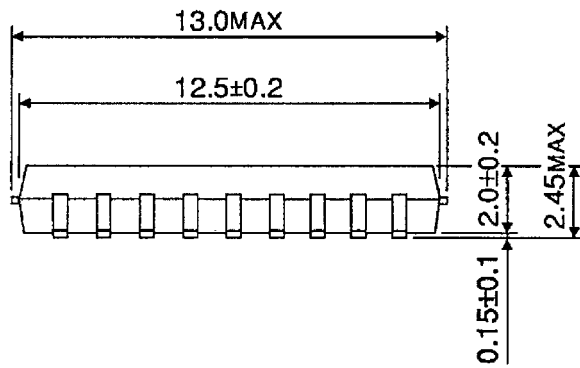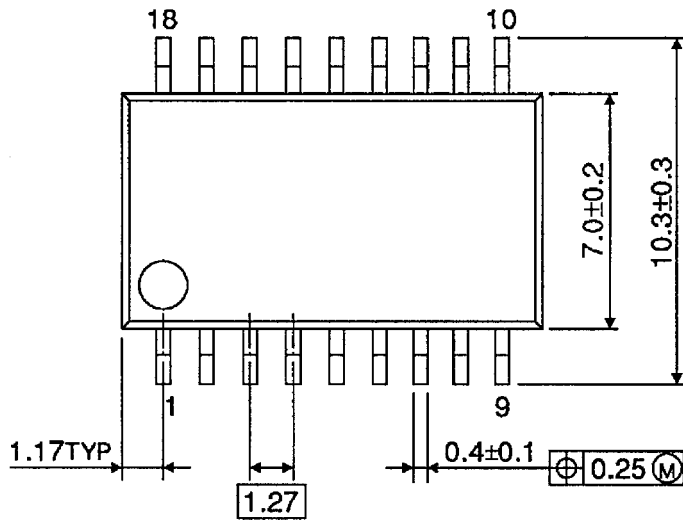

Weight: 0.41 g (Typ.)

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.