

LINEAR INTEGRATED CIRCUIT

12 V VOLTAGE REGULATOR

- OUTPUT CURRENT > 500 mA
- TIGHT TOLERANCE for OUTPUT VOLTAGE
- LOAD REGULATION LESS THAN 1%
- RIPPLE REJECTION 60 dB TYPICAL
- LOW OUTPUT IMPEDANCE
- EXCELLENT TRANSIENT RESPONSE
- HIGH TEMPERATURE STABILITY

The TDA 1412 is a silicon monolithic voltage regulator in Jedec TO-126 plastic package which can supply more than 500 mA. It incorporates the following functions:

- internal overload protection
- short-circuit protection


The TDA 1412 can be used for voltage regulation in consumer applications.

ABSOLUTE MAXIMUM RATINGS

V_i	Input supply voltage	27	V
P_{tot}	Total power dissipation at $T_{amb} \leq 25^\circ\text{C}$	1.25	W
	at $T_{case} \leq 25^\circ\text{C}$	14	W
$\rightarrow T_{stg}, T_j$	Storage and junction temperature	-55 to 150	$^\circ\text{C}$
T_{op}	Operating temperature	0 to 70	$^\circ\text{C}$


MECHANICAL DATA

Dimensions in mm

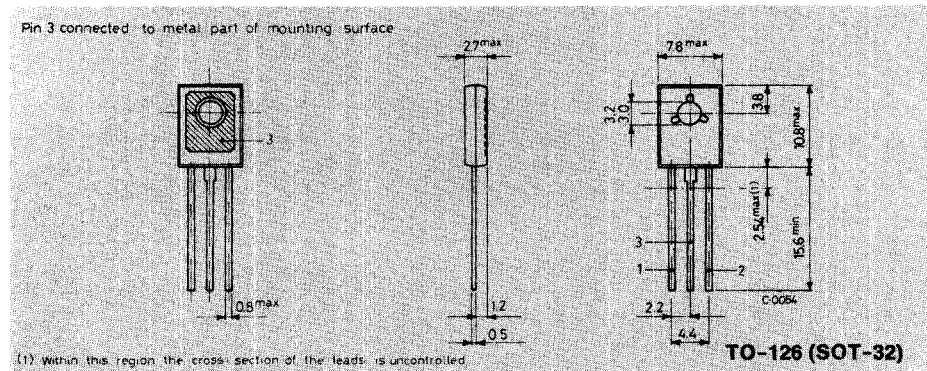


TDA 1412


BLOCK DIAGRAM

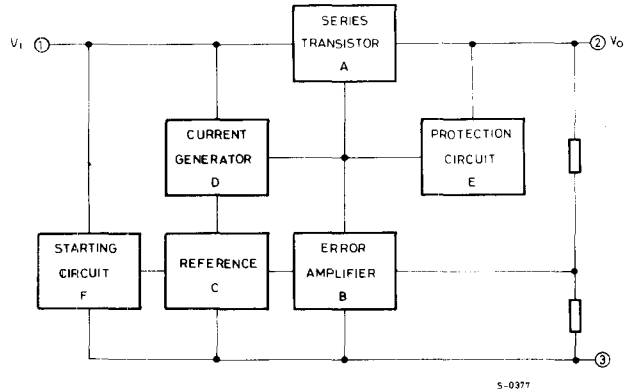


SCHEMATIC DIAGRAM

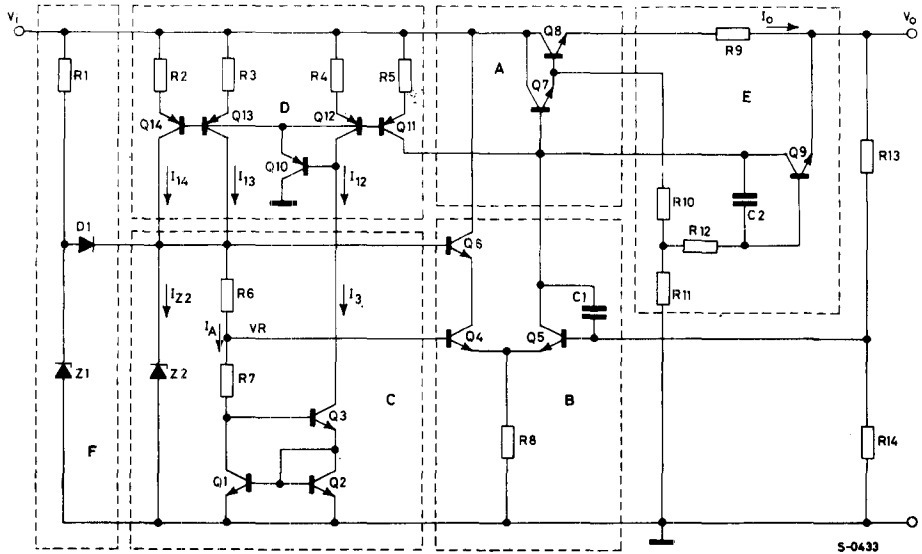

TEST CIRCUIT with output characteristic

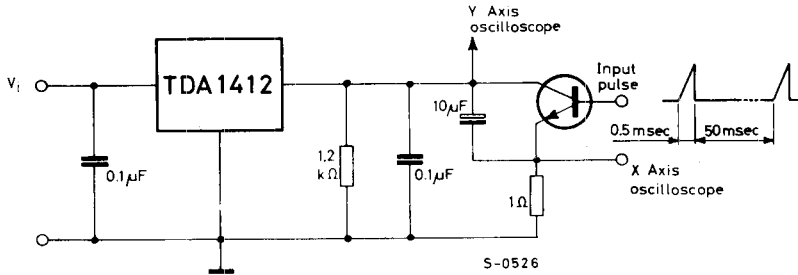

www.DataSheet4U.com

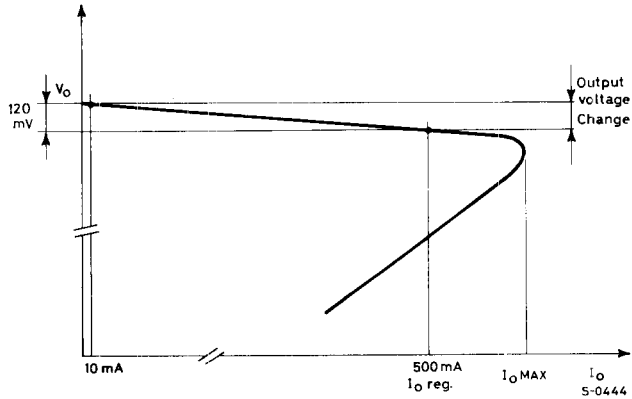

THERMAL DATA

$R_{th\ j-case}$	Thermal resistance junction-case	max	9 °C/W
$R_{th\ j-amb}$	Thermal resistance junction-ambient	max	100 °C/W

TDA 1412

ELECTRICAL CHARACTERISTICS


($T_i = 25\text{ °C}$, $V_i = 21\text{ V}$ unless otherwise specified)

Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_o Output voltage	$14.5\text{ V} \leq V_i \leq 27\text{ V}$ $I_o = 10\text{ mA}$ $C_L = 10\text{ }\mu\text{F}$	11.4	12	12.6	V
ΔV_o^* Load regulation	$I_o = 10\text{ to }500\text{ mA}$ $C_L = 10\text{ }\mu\text{F}$		0.3	1	%V
I_o^* Regulated output current	$\frac{\Delta V_o}{V_o} \leq 1\%$	500	720		mA
$I_o\text{MAX}^*$ Maximum output current	$T_{\text{case}} = 25\text{ °C}$ $T_{\text{case}} = 70\text{ °C}$		0.75 0.8	1	A A
I_{sc} Output short-circuit current	$V_o = 0$		100	200	mA
I_d Quiescent drain current	$V_i = 27\text{ V}$ $I_o = 0$		10		mA
ΔV_o Line regulation	$V_i = 14.5\text{ to }21\text{ V}$ $I_o = 10\text{ mA}$ $C_L = 10\text{ }\mu\text{F}$		6	33	mV
$\frac{\Delta V_o}{\Delta T_{\text{amb}}}$ Temperature coefficient	$I_o = 10\text{ mA}$ $C_L = 10\text{ }\mu\text{F}$ $T_{\text{amb}} = 0\text{ to }70\text{ °C}$		1.2		mV/°C
e_N Output noise voltage	$I_o = 10\text{ mA}$ $C_L^{**} = 20\text{ }\mu\text{F}$ B = 10 Hz to 100 kHz		150		μV
R_o Output resistance	$I_o = 500\text{ mA}$		20		m Ω
SVR Supply voltage rejection	$V_i = 19\text{ V}$ $I_o = 10\text{ mA}$ $\Delta V_i = 4\text{ V peak to peak}$ f = 100 Hz $C_L = 10\text{ }\mu\text{F}$	46	60		dB


* Refer to the test circuit

** Tantalum capacitor


Typical output voltage versus output current

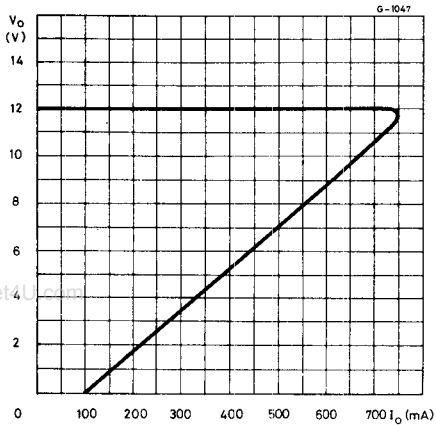


Power rating chart

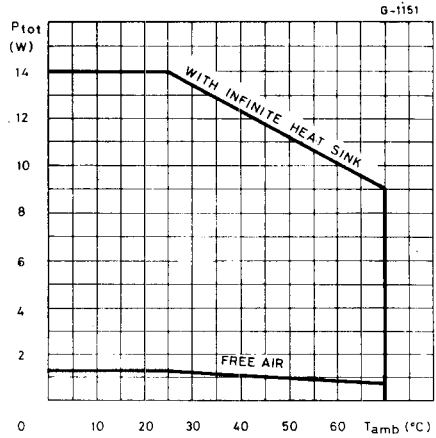

Typical regulated output current versus junction temperature

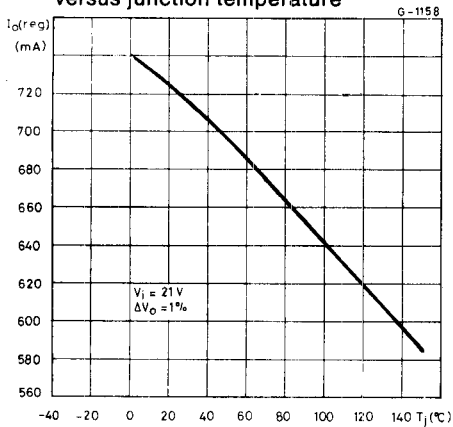


Maximum output current versus junction temperature

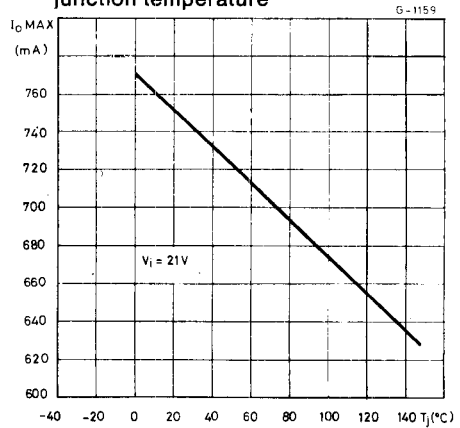


TDA 1412


Typical dropout voltage versus junction temperature

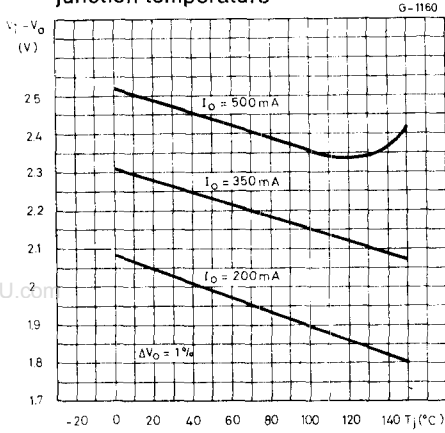


Typical short-circuit current versus input voltage

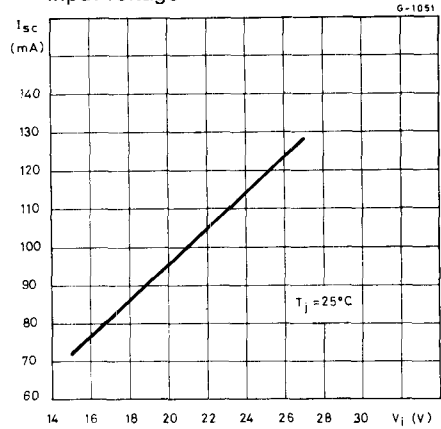


Typical short-circuit current versus junction temperature

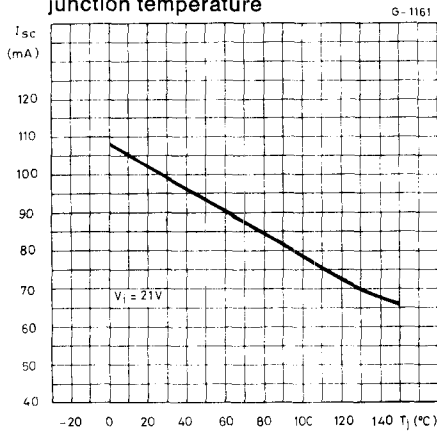


Typical quiescent drain current versus junction temperature

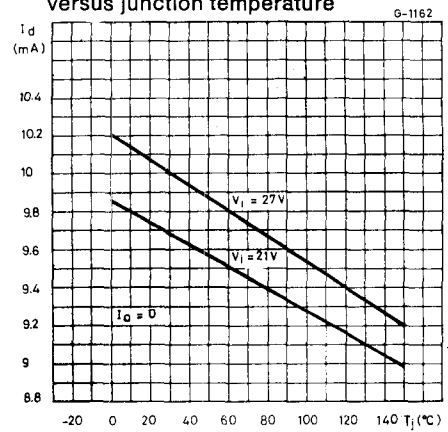


Typical quiescent drain current variation versus junction temperature

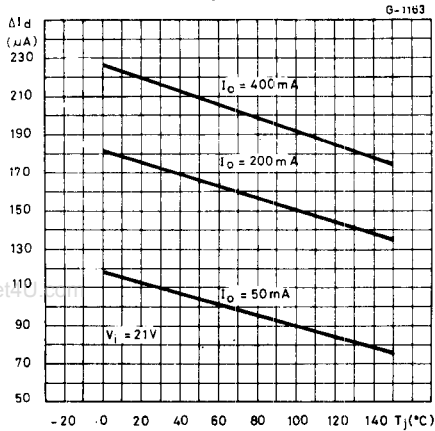


Typical supply voltage rejection versus frequency

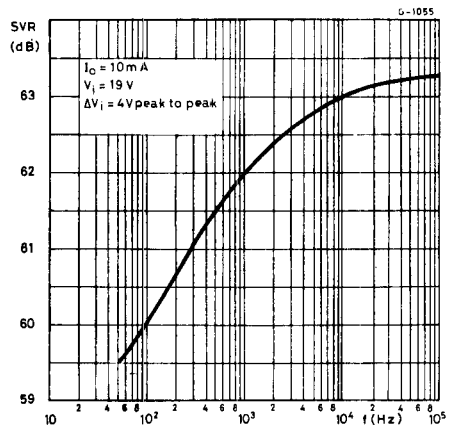

Typical supply voltage rejection versus regulated output current

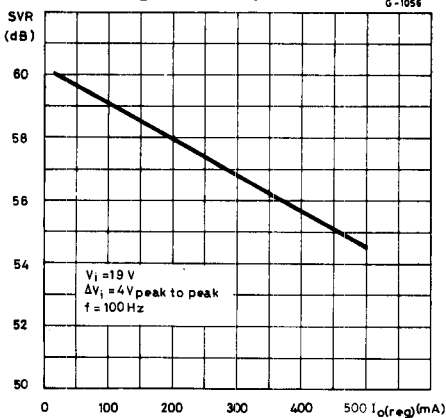


Typical output resistance versus frequency

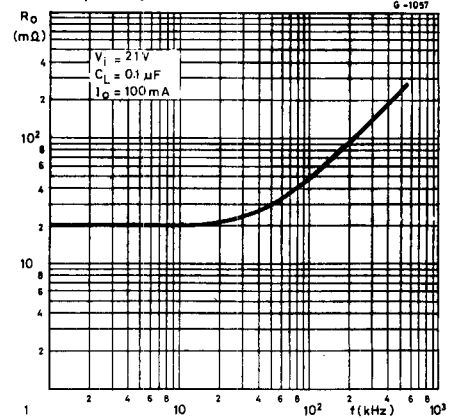

TDA 1412


Typical line transient response

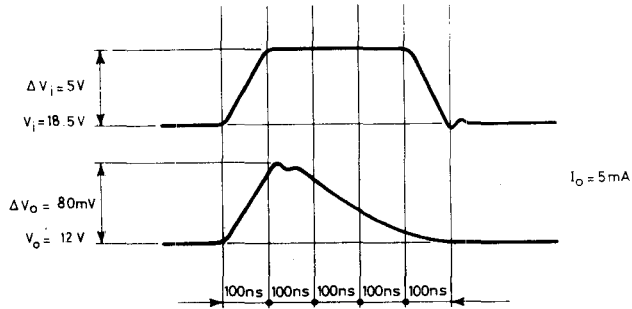

S-0445

APPLICATION INFORMATION


Typical connection circuit

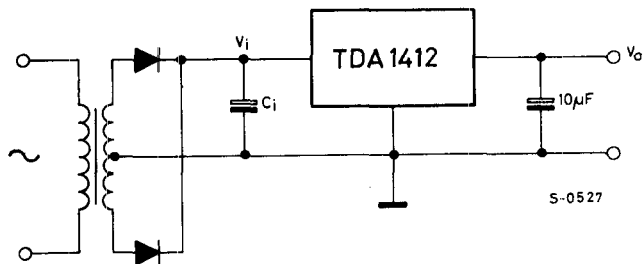

S-0527


APPLICATION INFORMATION (continued)

Negative output voltage circuit

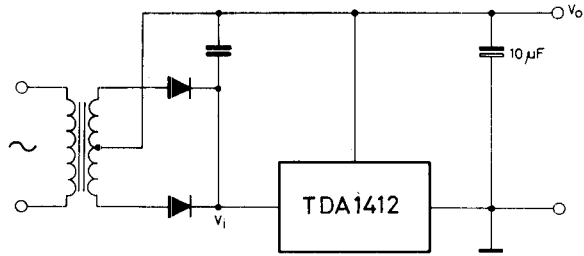

S-0528

Parallel connected voltage regulators and its output characteristics

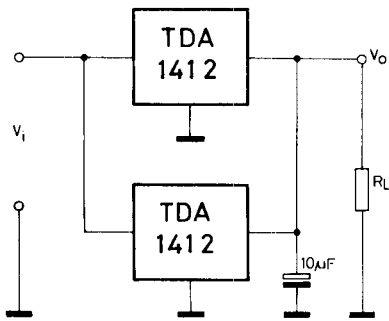

S-0529

