

isc N-Channel MOSFET Transistor

2SK2223-01

DESCRIPTION

- Drain Current $I_D=10A@ T_C=25^\circ C$
- Drain Source Voltage-
: $V_{DSS}= 500V(\text{Min})$
- Fast Switching Speed
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS



- Motor control
- UPS
- DC-DC converters
- General purpose power amplifier

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ C$)

SYMBOL	ARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage ($V_{GS}=0$)	500	V
V_{GS}	Gate-Source Voltage	± 30	V
I_D	Drain Current-continuous@ $T_C=25^\circ C$	10	A
$I_{D(\text{puls})}$	Pulse Drain Current	40	A
P_{tot}	Total Dissipation@ $T_C=25^\circ C$	80	W
T_j	Max. Operating Junction Temperature	150	$^\circ C$
T_{stg}	Storage Temperature Range	-55~150	$^\circ C$

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{\text{th } j-c}$	Thermal Resistance, Junction to Case	1.56	$^\circ C/W$
$R_{\text{th } j-a}$	Thermal Resistance, Junction to Ambient	30	$^\circ C/W$

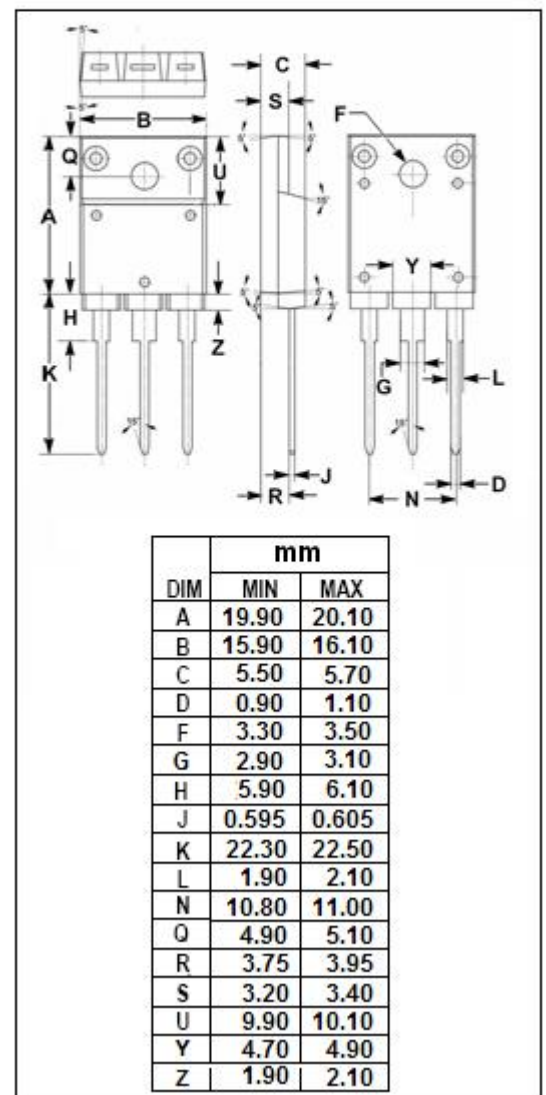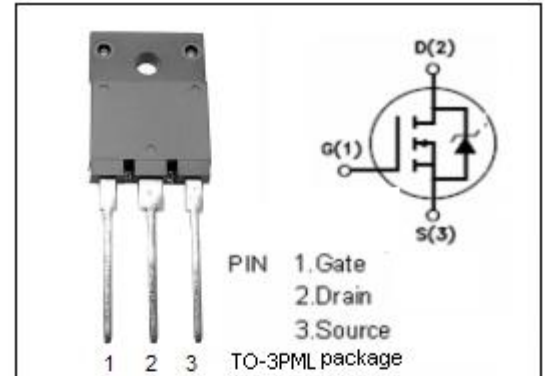

isc N-Channel Mosfet Transistor
2SK2223-01
• ELECTRICAL CHARACTERISTICS (T_c=25°C)

SYMBOL	PARAMETER	CONDITIONS	MIN	TYPE	MAX	UNIT
V _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} = 0; I _D = 1mA	500			V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} ; I _D =1mA	2.5	3.0	3.5	V
V _{SD}	Diode Forward On-Voltage	I _F =2 I _{DR} ; V _{GS} = 0		1.12	1.7	V
R _{DS(on)}	Drain-Source On-Resistance	V _{GS} = 10V; I _D = 5A		0.6	0.7	Ω
I _{GSS}	Gate-Body Leakage Current	V _{GS} = ±30V; V _{DS} = 0			±100	nA
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = 500V; V _{GS} = 0			500	μA
C _{iss}	Input Capacitance	V _{DS} =25V;		1500	2200	pF
C _{rss}	Reverse Transfer Capacitance	V _{GS} =0V;		35	50	
C _{oss}	Output Capacitance	f _r =1MHz		160	240	
t _r	Rise Time	V _{GS} =10V;		40	60	ns
t _{d(on)}	Turn-on Delay Time	I _D =10A;		15	25	
t _f	Fall Time	V _{DD} =300V;		60	90	
t _{d(off)}	Turn-off Delay Time	R _{GS} =10 Ω		70	100	

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.