



# Topstek Current Transducer TH3A .. TH50A


## TH 3A~50A

### Features

- ◆ Highly reliable Hall Effect device
- ◆ Compact and light weight
- ◆ Fast response time
- ◆ Excellent linearity of the output voltage over a wide input range
- ◆ Excellent frequency response (> 50 kHz)
- ◆ Low power consumption (12 mA nominal)
- ◆ Capable of measuring both DC and AC, both pulsed and mixed
- ◆ High isolation voltage between the measuring circuit and the current-carrying conductor (AC2.5KV)
- ◆ Extended operating temperature range
- ◆ Flame-Retardant plastic case and silicone encapsulate, using UL classified materials, ensures protection against environmental contaminants and vibration over a wide temperature and humidity range

### Applications

- ◆ UPS systems
- ◆ Industrial robots
- ◆ NC tooling machines
- ◆ Elevator controllers
- ◆ Process control devices
- ◆ AC and DC servo systems
- ◆ Motor speed controller
- ◆ Electrical vehicle controllers
- ◆ Inverter-controlled welding machines
- ◆ General and special purpose inverters
- ◆ Power supply for laser processing machines
- ◆ Controller for traction equipment e.g. electric trains
- ◆ Other automatic control systems

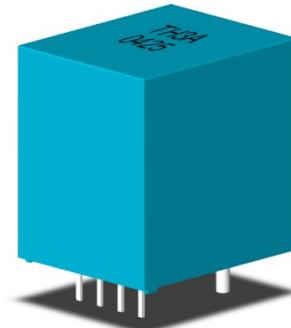

### Specifications

Parameter	Symbol	Unit	TH3A .. TH50A	TH3A-B12 .. TH50A-B12
Nominal Input Current	I <sub>fn</sub>	A DC		3 .. 50
Linear Range	I <sub>fs</sub>	A DC	±9 .. ±150 = 3x I <sub>fn</sub>	±7.2 .. ±120 = 2.4x I <sub>fn</sub>
Nominal Output Voltage	V <sub>hn</sub>	V	4 V±1% at I <sub>f</sub> =I <sub>fn</sub> ( R <sub>L</sub> =10kΩ )	
Offset Voltage	V <sub>os</sub>	mV	Within ±40 mV @ I <sub>f</sub> =0, T <sub>a</sub> =25°C	
Output Resistance	R <sub>OUT</sub>	Ω		<100Ω
Hysteresis Error	V <sub>oh</sub>	mV	Within ±15 mV @ I <sub>f</sub> =I <sub>fn</sub> →0	
Supply Voltage	V <sub>CC</sub> /V <sub>EE</sub>	V	±15V ±5%	±12V ±5%
Linearity	ρ	%	Within ±1% of I <sub>fn</sub>	
Consumption Current	I <sub>CC</sub>	mA	±12 mA nominal, ±16 mA max	
Response Time (90%V <sub>hn</sub> )	T <sub>r</sub>	μsec	5 μsec max. @ d I <sub>f</sub> / dt = I <sub>fn</sub> / μsec	
Frequency bandwidth (-3dB)	f <sub>BW</sub>	Hz	DC to 50kHz	
Thermal Drift of Output	-	%/°C	Within ±0.1 %/°C @ I <sub>fn</sub>	
Thermal Drift of Zero Current Offset	-	mV/°C	Within ±1.5 mV/°C @ I <sub>fn</sub>	
Dielectric Strength	-	V	AC2.5KV X 60 sec	
Isolation Resistance @ 1000 VDC	R <sub>IS</sub>	MΩ	>1000 MΩ	
Operating Temperature	T <sub>a</sub>	°C	-15°C to 80°C	
Storage Temperature	T <sub>s</sub>	°C	-20°C to 85°C	
Mass	W	g	10 g	






# Topstek Current Transducer TH3A .. TH50A



## Appearance, dimensions and pin identification for TH3A .. TH30A models

All dimensions in mm  $\pm 0.5$ , holes  $-0, +0.2$  except otherwise noted.

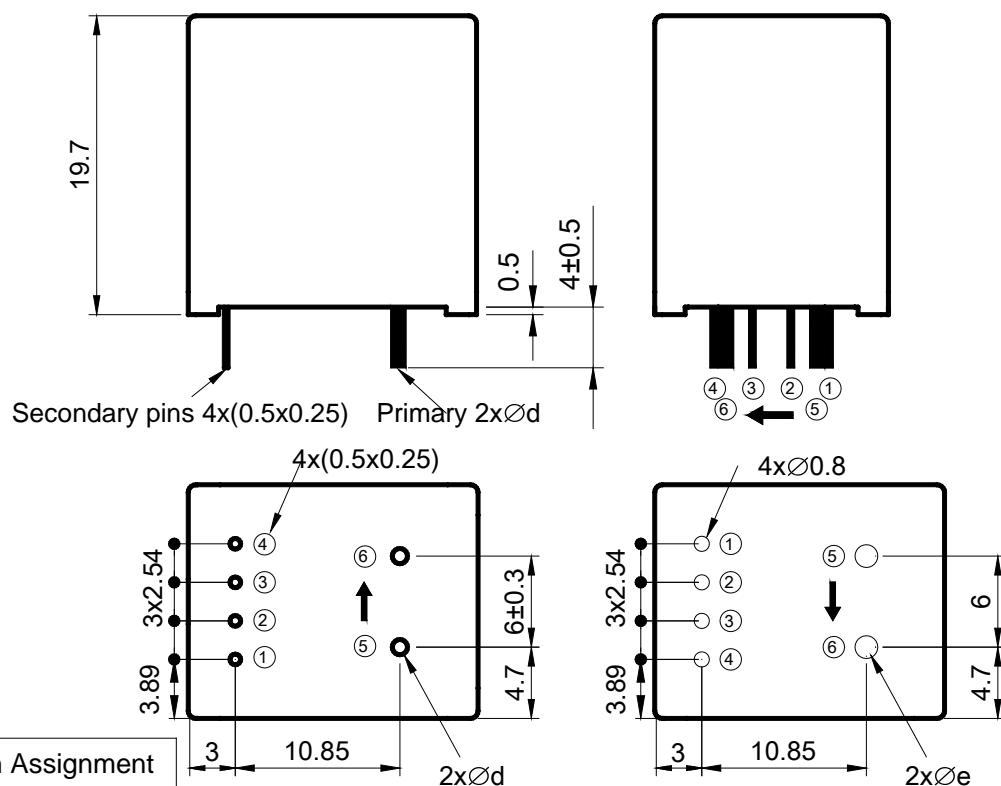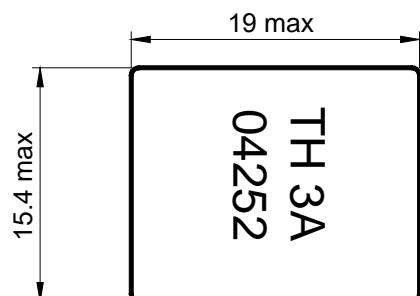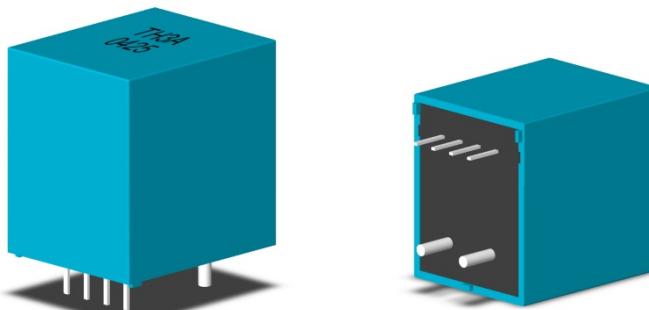

Pin Assignment	
(1)	-15V
(2)	0V
(3)	+15V
(4)	Vout
(5)	I +
(6)	I -

Part Number	1-3A	4-6A	6-9A	10-12.5A	13-18.5A	20-30A
d(mm)	0.6	0.8	1.0	1.2	1.4	1.6
e(mm)	1.2	1.2	1.6	1.8	2.2	2.4












# Topstek Current Transducer TH3A .. TH50A

Appearance, dimensions and pin identification for TH37.5A .. TH50A models

All dimensions in mm  $\pm 0.5$ , holes -0, +0.2 except otherwise noted.

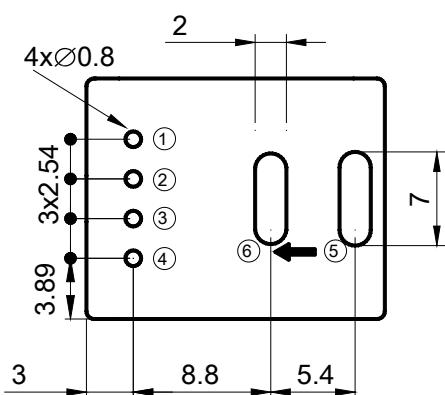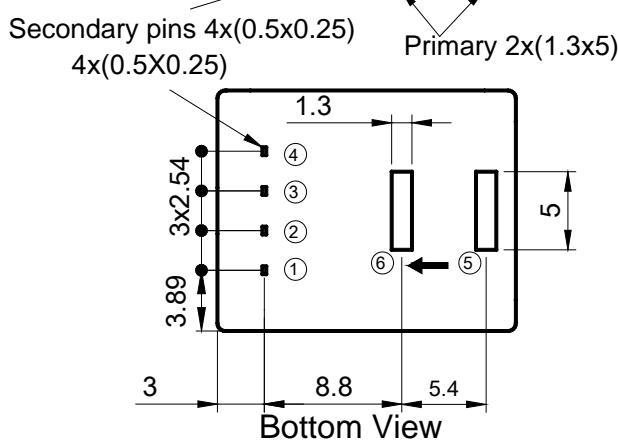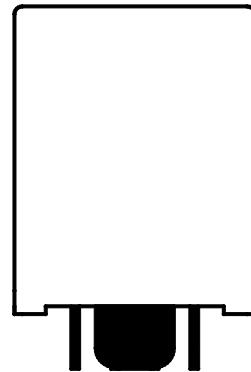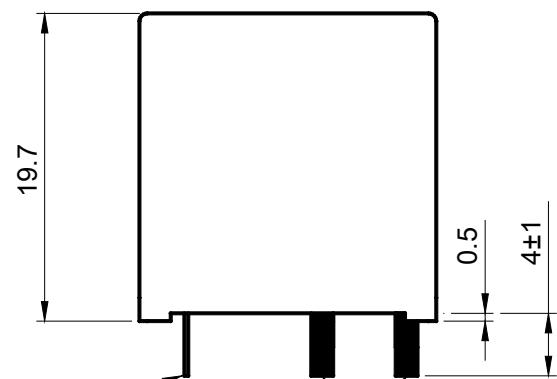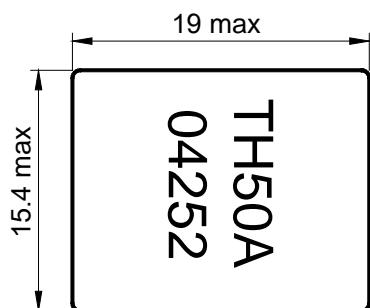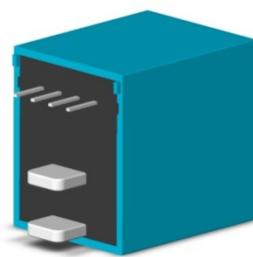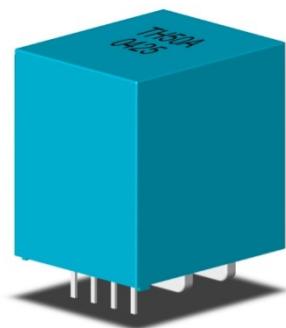

PCB mounting hole layout  
→ Positive current flow direction

Pin Assignment	
①	-15V
②	0V
③	+15V
④	Vout
⑤	I +
⑥	I -

Part Number	TH37.5A	TH50A
d(mm)	<input type="checkbox"/> 1.3x5	<input type="checkbox"/> 1.3x5
e(mm)	<input type="checkbox"/> 2.0x6	<input type="checkbox"/> 2.0x6