

THC63LVD104S

112MHz 30Bits Color LVDS Receiver

General Description

The THC63LVD104S receiver is designed to support pixel data transmission between Host and Flat Panel Display from NTSC up to SXGA resolutions. The THC63LVD104S converts the LVDS data streams back into 35bits of CMOS/TTL data with rising edge or falling edge clock for convenient with a variety of LCD panel controllers. At a transmit clock frequency of 112MHz, 30bits of RGB data and 5bits of timing and control data (HSYNC, VSYNC, DE, CNTL1, CNTL2) are transmitted at an effective rate of 784Mbps per LVDS channel. Using a 112MHz clock, the data throughput is 490Mbytes per second.


Features

- Wide dot clock range: 8-112MHz suited for NTSC, VGA, SVGA, XGA, and SXGA
- PLL requires no external components
- 50% output clock duty cycle
- TTL clock edge and position programmable(3 step)
- Power down mode
- Low power single 2.5V CMOS design
- TQFP 64pin
- Pin compatible with THC63LVD104A
- Fail-safe for Open CLK Input


DataSheet4U.com

DataShee

Block Diagram

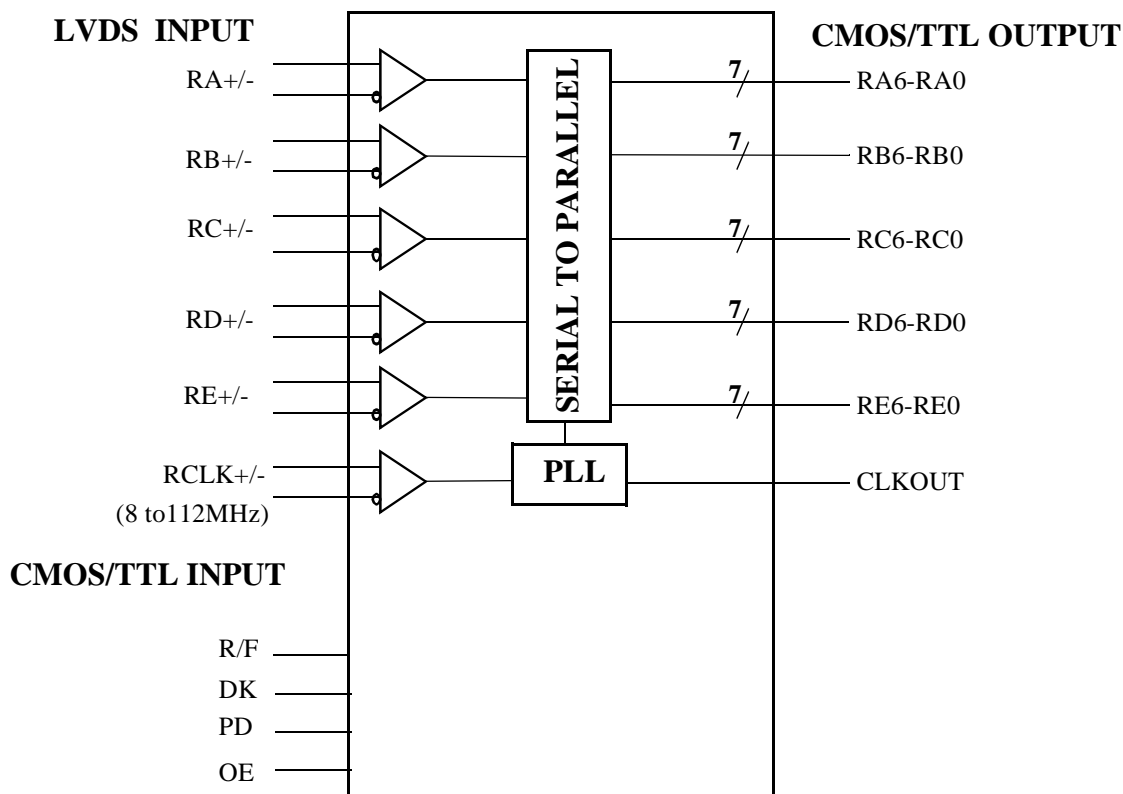

Pin Out

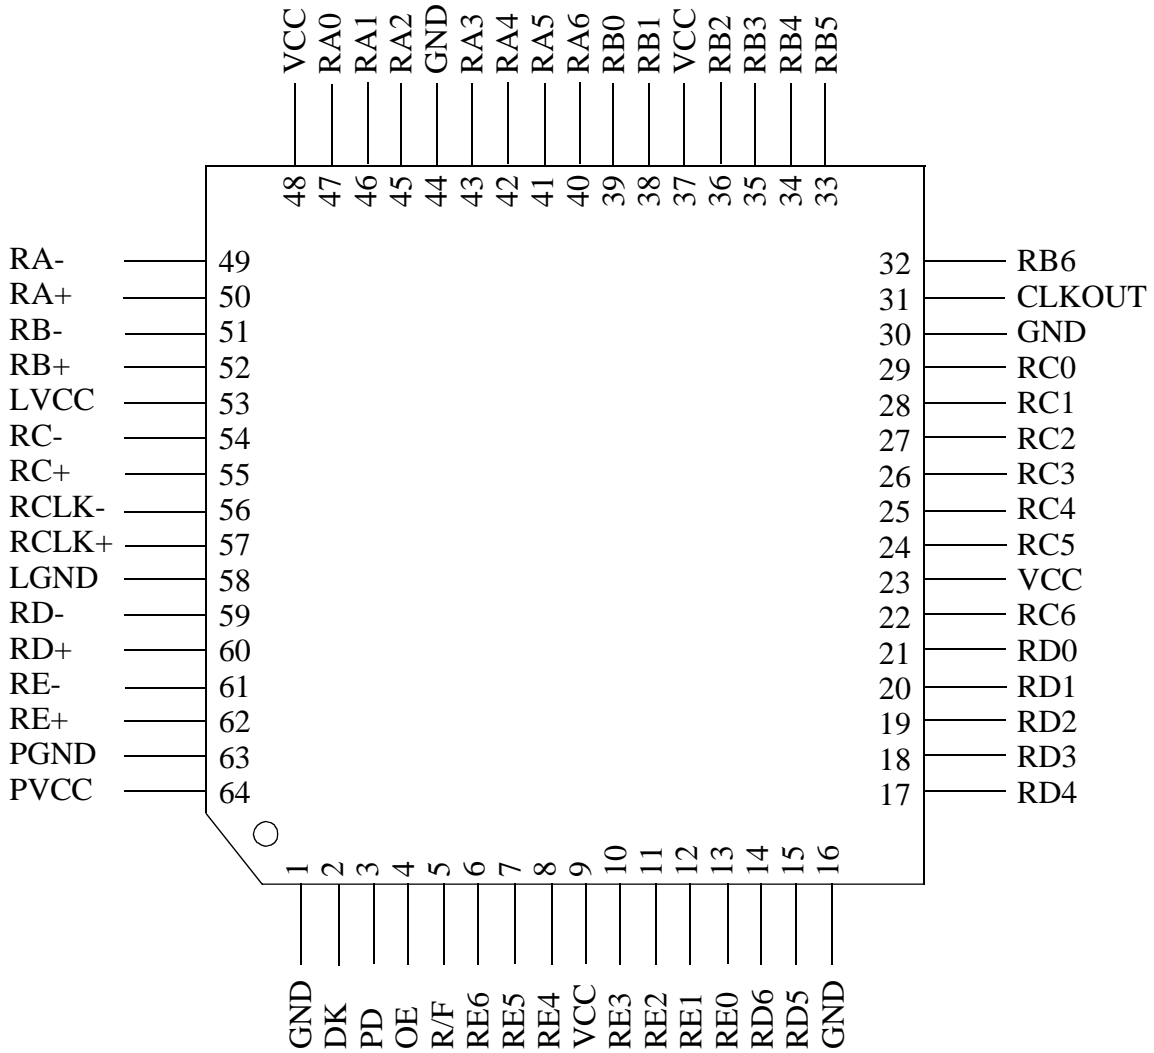

et4U.com

DataShee

Pin Description

Pin Name	Pin No.	I/O Type	Description
RA+, RA-	50, 49	LVDS IN	LVDS Data In.
RB+, RB-	52, 51	LVDS IN	
RC+, RC-	55, 54	LVDS IN	
RD+, RD-	60, 59	LVDS IN	
RE+, RE-	62, 61	LVDS IN	
RCLK+, RCLK-	57, 56	LVDS IN	LVDS Clock In.
RA6 ~ RA0	40,41,42,43,45,46,47	OUT	CMOS/TTL Data Outputs.
RB6 ~ RB0	32,33,34,35,36,38,39	OUT	
RC6 ~ RC0	22,24,25,26,27,28,29	OUT	
RD6 ~ RD0	14,15,17,18,19,20,21	OUT	
RE6 ~ RE0	6,7,8,10,11,12,13	OUT	
PD	3	IN	Power down and Output Control.(Table1) H: Normal operation L: Power down
OE	4	IN	Output Enable. See Table1. H:Output enable. L:Output disable
DK	2	IN (3-Level)	Output Clock Delay Timing Select.(Fig5) t_{RCP} =Output Clock Cycle L: Offset 0[nsec] M: Offset $-3\frac{t_{RCP}}{14}$ (typ) [nsec] H: Offset $+3\frac{t_{RCP}}{14}$ (typ)[nsec]
R/F	5	IN	Output Clock Triggering Edge Select.(Fig5) H: Rising Edge L: Falling Edge
VCC	9,23,37,48	Power	Power Supply Pins for TTL outputs and digital circuitry.
CLKOUT	31	OUT	Clock out.
GND	1,16,30,44	Ground	Ground Pins for TTL outputs and digital circuitry.
LVCC	53	Power	Power Supply Pin for LVDS inputs.
LGND	58	Ground	Ground Pin for LVDS inputs.
PVCC	64	Power	Power Supply Pin for PLL circuitry.
PGND	63	Ground	Ground Pin for PLL circuitry.

Pin Description (Continued)

Table 1. Output Control

PD	OE	Data Outputs (Rxn)	CLKOUT
L	L	Hi-Z	Hi-Z
L	H	All Low	Fixed Low
H	L	Hi-Z	Hi-Z
H	H	Data Out	CLK Out

** Rxn x = A,B,C,D,E n = 0,1,2,3,4,5,6

Absolute Maximum Ratings

Supply Voltage (V_{CC})	-0.3V ~ +3.0V
CMOS/TTL Input Voltage	-0.3V ~ ($V_{CC} + 0.3V$)
CMOS/TTL Output Voltage	-0.3V ~ ($V_{CC} + 0.3V$)
LVDS Receiver Input Voltage	-0.3V ~ ($V_{CC} + 0.3V$)
Output Current	-30mA ~ 30mA
Junction Temperature	+125°C
Storage Temperature Range	-55°C ~ +150°C
Resistance to soldering heat	+260°C/10sec
Maximum Power Dissipation @+25°C	1.4W

Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
All Supply Voltage	2.3	2.5	2.7	V
Operating Ambient Temperature	0		70	°C
Differential CLKIN Frequency	8		112	MHz
Differential CLKIN High Time(t_{RCH}) (Fig1)	$2 \frac{t_{RCIP}}{7}$		$5 \frac{t_{RCIP}}{7}$	nsec
Differential CLKIN Low Time(t_{RCIL}) (Fig1)	$2 \frac{t_{RCIP}}{7}$		$5 \frac{t_{RCIP}}{7}$	nsec

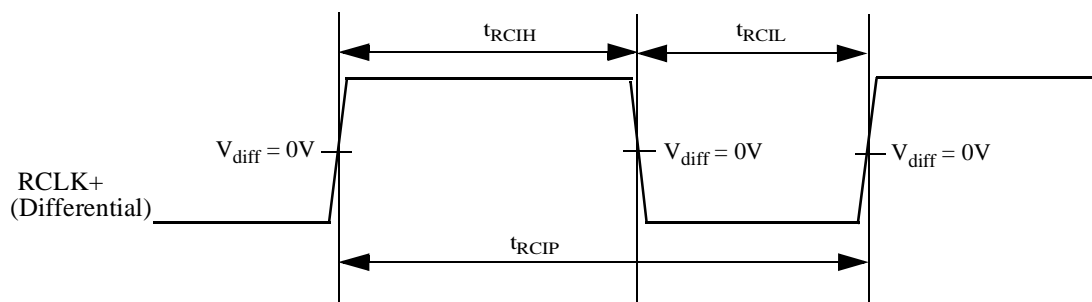


Fig1. Differential CLKIN

Electrical Characteristics

CMOS/TTL DC Specifications

 $V_{CC}=V_{CC}=PV_{CC}=LV_{CC}$

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{IH}	High Level Input Voltage	PD, OE,R/F Pin	1.7		V_{CC}	V
V_{IL}	Low Level Input Voltage		GND		0.7	V
V_{IH3}	High Level Input Voltage	3-Level Inputs(DK Pin)	2.1		V_{CC}	V
V_{IM3}	Middle Level Input Voltage		1.05	1.25	1.45	V
V_{IL3}	Low Level Input Voltage		GND		0.4	V
V_{OH}	High Level Output Voltage	$I_{OH} = -2mA$	2.1			V
V_{OL}	Low Level Output Voltage	$I_{OL} = 2mA$			0.4	V
I_{IL}	Input Leakage Current	PD, OE,R/F Pin $0V \leq V_{IN} \leq V_{CC}$			± 10	μA
I_{IL3}	3-Level Input Leakage Current	3-Level Inputs(DK Pin) $0V \leq V_{IN} \leq V_{CC}$			± 10	μA

LVDS Receiver DC Specifications

 $V_{CC}=V_{CC}=PV_{CC}=LV_{CC}$

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{TH}	Differential Input High Threshold	$V_{IC} = 1.2V$			100	mV
V_{TL}	Differential Input Low Threshold	$V_{IC} = 1.2V$	-100			mV
I_{ILD}	Differential Input Leakage Current	$V_{IN} = 2.4V / 0V$			± 200	μA

Supply Current

 $V_{CC}=V_{CC}=PV_{CC}=LV_{CC}$

Symbol	Parameter	Conditions	Min	Typ	Max	Units
I_{RCCW}	Receiver Supply Current Checker Pattern(Worst Case) (Fig 2)	$f_{CLKOUT}=65MHz$	CL=8pF		125	mA
		$f_{CLKOUT}=85MHz$			152	mA
		$f_{CLKOUT}=112MHz$			184	mA
I_{RCCS}	Receiver Power Down Supply Current	PD = L, Ta=RT			10	μA

Electrical Characteristics (Continued)

Checker Pattern

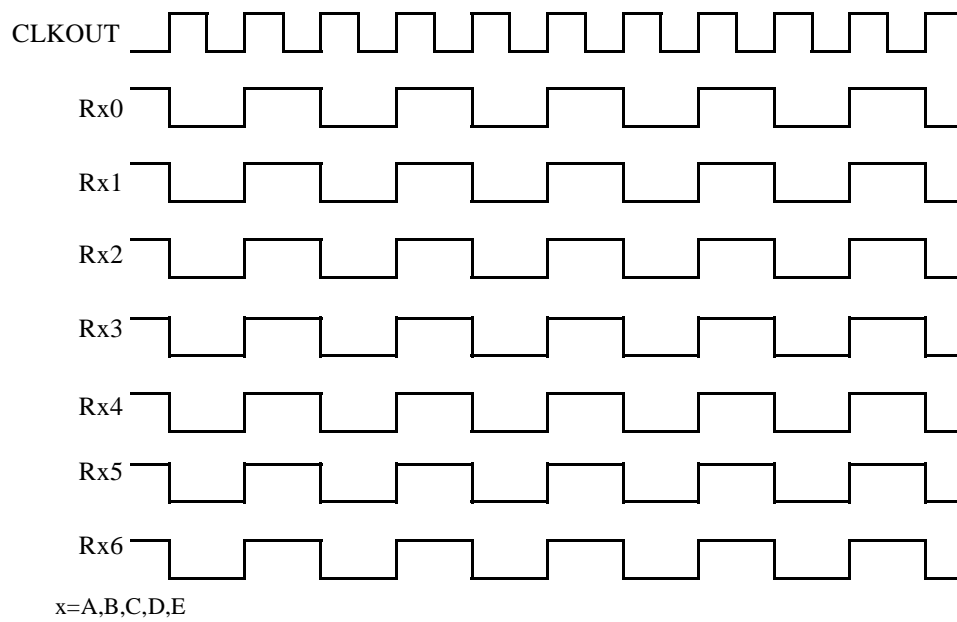


Fig2. Test Pattern

Switching Characteristics

 $V_{CC}=V_{CC}=PV_{CC}=LV_{CC}$

Symbol	Parameter		Min.	Typ.	Max.	Units
t_{RCP}	CLKOUT Period (Fig4)		8.93	T	125.0	ns
t_{RCH}	CLKOUT High Time (Fig4)			$\frac{T}{2}$		ns
t_{RCL}	CLKOUT Low Time (Fig4)			$\frac{T}{2}$		ns
t_{RS}	TTL Data Setup to CLKOUT		$0.50t_{RCP}-1.5$			ns
t_{RH}	TTL Data Hold to CLKOUT		$0.35t_{RCP}-1.0$			ns
t_{TLH}	TTL Low to High Transition Time (Fig 3)			1.3	3.0	ns
t_{THL}	TTL High to Low Transition Time (Fig 3)			1.3	3.0	ns
t_{SK}	Receiver Skew Margin (Fig6)	$t_{RCIP}=85\text{MHz}$	-400	0	400	ps
		$t_{RCIP}=112\text{MHz}$	-350	0	350	ps
t_{RIP1}	Input Data Position0 (Fig6)		$-t_{SK}$	0	$+t_{SK}$	ns
t_{RIP0}	Input Data Position1 (Fig6)		$\frac{t_{RCIP}}{7} - t_{SK}$	$\frac{t_{RCIP}}{7}$	$\frac{t_{RCIP}}{7} + t_{SK}$	ns
t_{RIP6}	Input Data Position2 (Fig6)		$2\frac{t_{RCIP}}{7} - t_{SK}$	$2\frac{t_{RCIP}}{7}$	$2\frac{t_{RCIP}}{7} + t_{SK}$	ns
t_{RIP5}	Input Data Position3 (Fig6)		$3\frac{t_{RCIP}}{7} - t_{SK}$	$3\frac{t_{RCIP}}{7}$	$3\frac{t_{RCIP}}{7} + t_{SK}$	ns
t_{RIP4}	Input Data Position4 (Fig6)		$4\frac{t_{RCIP}}{7} - t_{SK}$	$4\frac{t_{RCIP}}{7}$	$4\frac{t_{RCIP}}{7} + t_{SK}$	ns
t_{RIP3}	Input Data Position5 (Fig6)		$5\frac{t_{RCIP}}{7} - t_{SK}$	$5\frac{t_{RCIP}}{7}$	$5\frac{t_{RCIP}}{7} + t_{SK}$	ns
t_{RIP2}	Input Data Position6 (Fig6)		$6\frac{t_{RCIP}}{7} - t_{SK}$	$6\frac{t_{RCIP}}{7}$	$6\frac{t_{RCIP}}{7} + t_{SK}$	ns
t_{RPLL}	Phase Lock Loop Set (Fig7)				10.0	ms
t_{RCD}	RCLK +/- to CLK OUT Delay (Fig8)	$t_{RCIP}=75\text{MHz}$	45.5		48.5	ns
t_{RCIP}	CLKIN Period (Fig6)		8.93		125.0	ns

AC Timing Diagrams

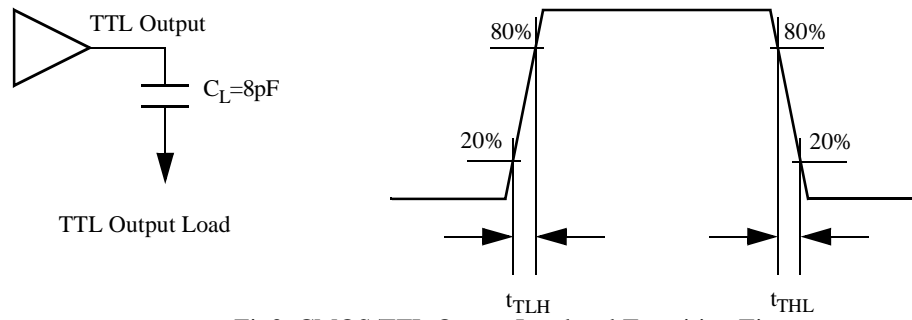


Fig3. CMOS/TTL Output Load and Transition Time

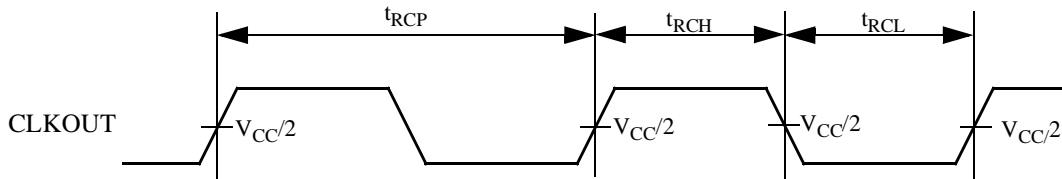


Fig4. CLKOUT Period and High/Low Time

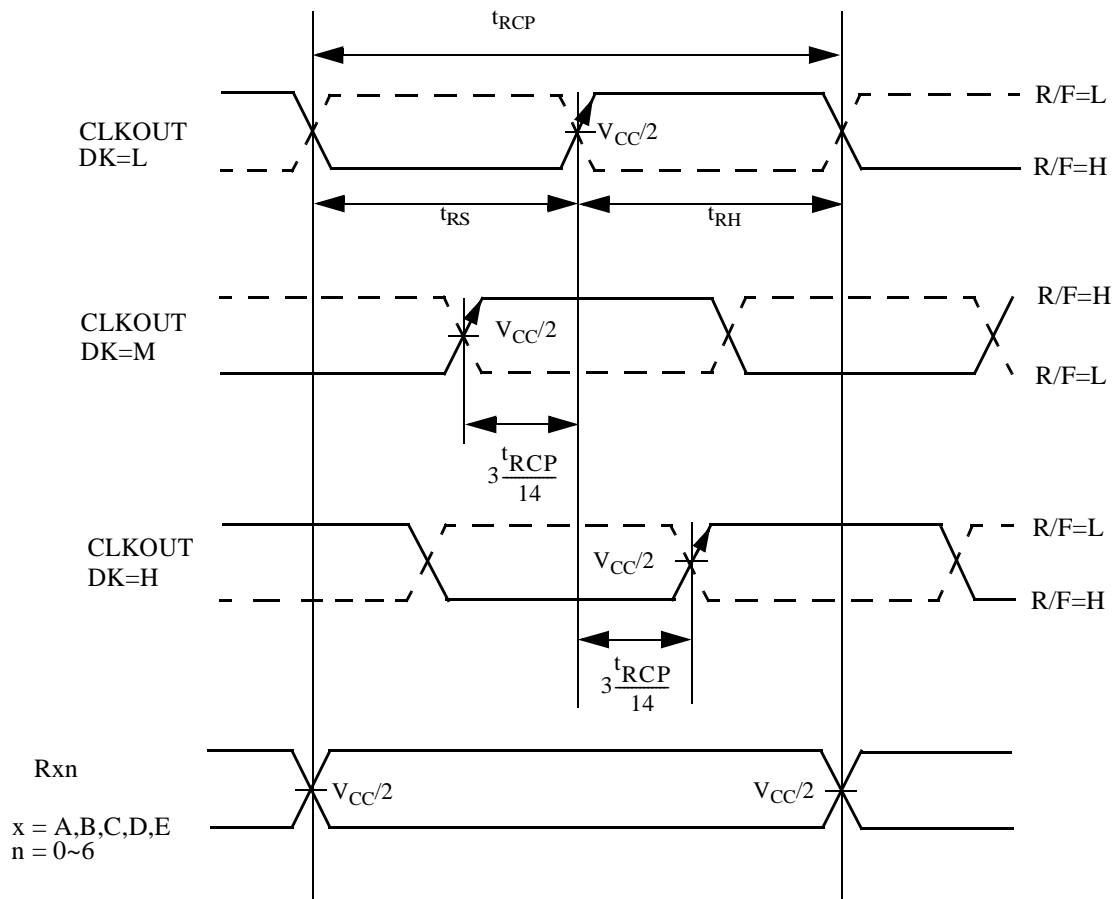


Fig5. CLKOUT Position and Setup/Hold Timing

AC Timing Diagrams (Continued)

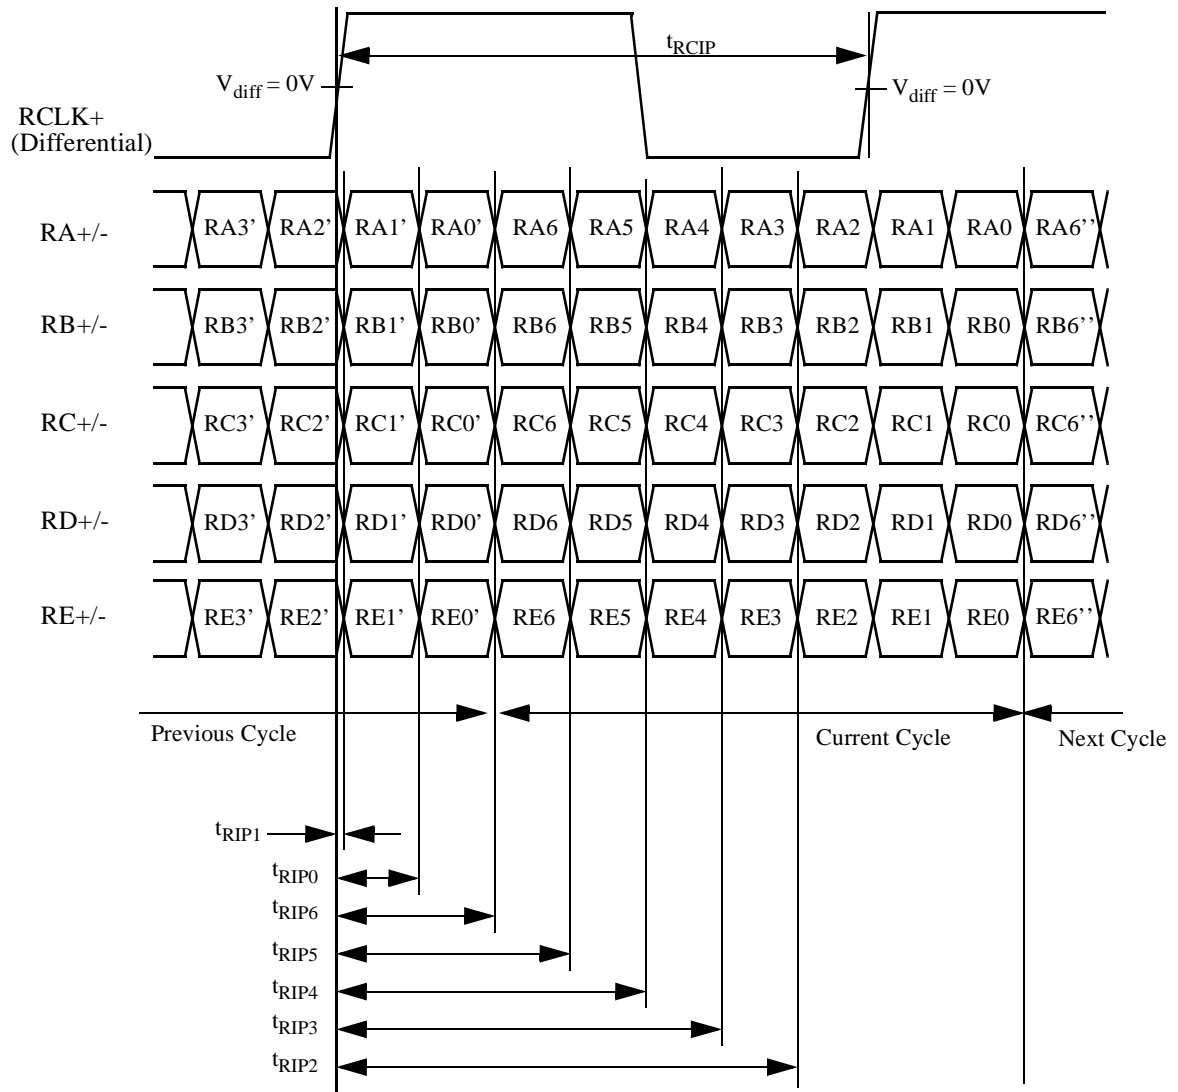


Fig6. LVDS Input Data Position


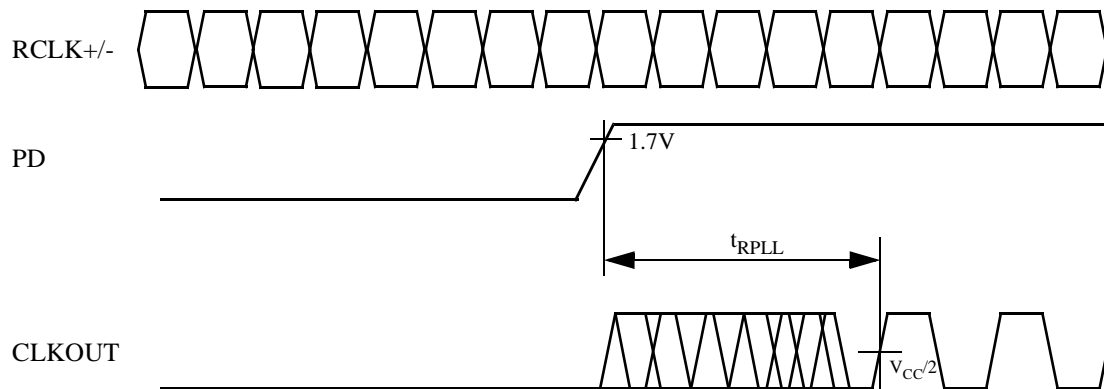


Fig7. PLL Lock Loop Set Time

AC Timing Diagrams (Continued)

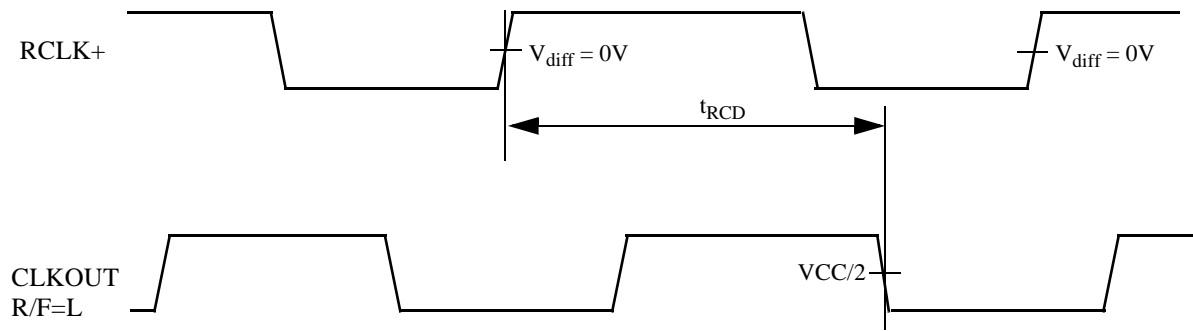


Note:

1) $V_{diff} = (RCLK+) - (RCLK-)$

Fig8. RCLK +/- to CLK OUT Delay

Package

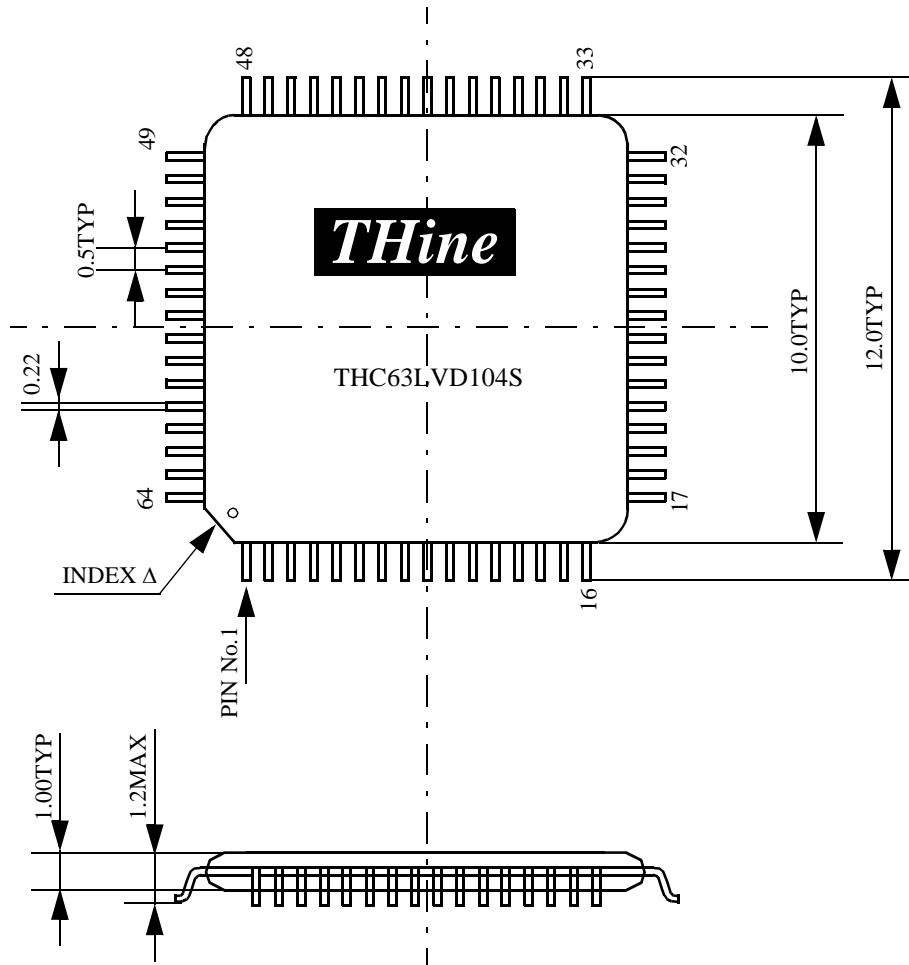

UNITS: mm

et4U.com

DataSheet4U.com

Notes to Users:

1. The contents of this data sheet are subject to change without prior notice.
2. Circuit diagrams shown in this data sheet are examples of application. Therefore, please pay sufficient attention when designing circuits. **EVEN IF THERE ARE INCORRECT DESCRIPTIONS, THINE IS NOT RESPONSIBLE FOR ANY PROBLEM DUE TO THEM.** Please note that incorrect descriptions sometimes cannot be corrected immediately if found.
3. THine's copyright, know-how and other intellectual property rights are included in this data sheet. Duplication of the data sheet and disclosure to other persons are strictly prohibited without THine's prior written permission.
4. **THINE IS NOT RESPONSIBLE FOR ANY PROBLEMS OF INTELLECTUAL PROPERTY RIGHTS OCCURRING DURING THC63LVD104S USE, EXCEPT FOR DAMAGES RESULTING FROM INFRINGEMENT CAUSED ONLY BY THC63LVD104HS WITHOUT ANY ITEM NOT SOLD BY THINE AND/OR ANY USERS' ACTION.** THINE IS NOT RESPONSIBLE FOR PROBLEMS CAUSED BY SPECIFICATIONS SUPPLIED BY USERS. THC63LVD104S is designed on the premise that it should be used for ordinary electronic devices. Therefore, it shall not be used for applications that require extremely high-reliability (space equipment, nuclear control equipment, medical equipment that affects people's lives, etc.). In addition, when using THC63LVD104S for traffic signals, safety devices and control/safety units in transportation equipment, etc., appropriate measures should be taken.
5. **THINE IS MAKING THE UTMOST EFFORT TO IMPROVE THE QUALITY AND RELIABILITY OF THINE'S PRODUCTS. HOWEVER, THERE IS A VERY SLIGHT POSSIBILITY OF FAILURE IN SEMICONDUCTOR DEVICES.** To avoid damage to social or official organizations, much care should be taken to provide sufficient redundancy and fail-safe design.
6. No radiation-hardened design is incorporated in THC63LVD104S.
7. Judgment on whether THC63LVD104S comes under strategic products prescribed by the Foreign Exchange and Foreign Trade Control Law is the user's responsibility.
8. This technical document was provisionally created during development of THC63LVD104S, so there is a possibility of differences between it and the product's final specifications. When designing circuits using THC63LVD104S, be sure to refer to the final technical documents.

THine Electronics, Inc.

Wakamatsu Bldg, 6F

3-3-6, Nihombashi-Honcho,

Chuo-ku, Tokyo, 103-0023 Japan

Tel: 81-3-3270-0666

Fax: 81-3-3270-0688