

# Topstek Current Transducer THX20A .. THX50A

## THX 20A~50A


www.DataSheet4U.com

### Features

- ◆ Highly reliable Hall Effect device
- ◆ Wide selectable input ranges with flexible pin configurations.
- ◆ Compact and light weight
- ◆ Fast response time
- ◆ Excellent linearity of the output voltage over a wide input range
- ◆ Excellent frequency response (> 50 kHz)
- ◆ Low power consumption (<12 mA)
- ◆ Capable of measuring both DC and AC, both pulsed and mixed
- ◆ High isolation voltage between the measuring circuit and the current-carrying conductor (AC2.5KV)
- ◆ Extended operating temperature range
- ◆ Flame-Retardant plastic case and silicone encapsulate, using UL classified materials, ensures protection against environmental contaminants and vibration over a wide temperature and humidity range

### Applications

- ◆ UPS systems
- ◆ Industrial robots
- ◆ NC tooling machines
- ◆ Elevator controllers
- ◆ Process control devices
- ◆ AC and DC servo systems
- ◆ Motor speed controller
- ◆ Electrical vehicle controllers
- ◆ Inverter-controlled welding machines
- ◆ General and special purpose inverters
- ◆ Power supply for laser processing machines
- ◆ Controller for traction equipment e.g. electric trains
- ◆ Other automatic control systems

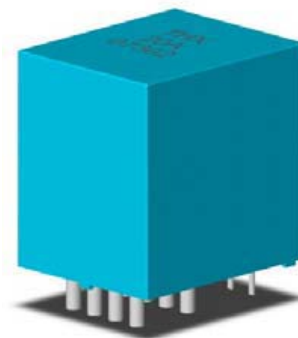

### Specifications




Parameter	Symbol	Unit	Configuration			
Primary Pin Configurations (to change N and $I_{fn}$ )						
Number of Primary Turns	N		1	2	4	
<b>THX20A</b>	Nominal Input Current	$I_{fn}$	A DC	20	10	5
	Linear Range	$I_{fs}$	A DC	±60	±30	±15
<b>THX30A</b>	Nominal Input Current	$I_{fn}$	A DC	30	15	7.5
	Linear Range	$I_{fs}$	A DC	±90	±45	±22.5
<b>THX50A</b>	Nominal Input Current	$I_{fn}$	A DC	50	25	12.5
	Linear Range	$I_{fs}$	A DC	±150	±75	±37.5
Nominal Output Voltage	$V_{hn}$	V	$V_{REF} + 0.625 V \pm 1\% \text{ at } I_f = I_{fn} \text{ ( } R_L = 10k\Omega \text{)}$			
Nominal Output @ $I_f = 0$	$V_{REF}$	V	$V_{CC}/2 \pm 12.5 \text{ mV, } T_a = 25^\circ\text{C}$			
Output Resistance	$R_{OUT}$	$\Omega$	<50 $\Omega$			
Hysteresis Error	$V_{oh}$	mV	Within ±5 mV @ $I_f = I_{fn} \rightarrow 0$			
Supply Voltage	$V_{CC}/V_{EE}$	V	+5V ±5%			
Linearity	$\rho$	%	Within ±0.5% of $I_{fn}$			
Consumption Current	$I_{CC}$	mA	<12 mA			
Response Time (90% $V_{hn}$ )	$T_r$	$\mu\text{sec}$	5 $\mu\text{sec}$ max. @ $d I_f / dt = I_{fn} / \mu\text{sec}$			
Frequency bandwidth (-3dB)	$f_{BW}$	Hz	DC to 50kHz			
Thermal Drift of Output	-	%/ $^\circ\text{C}$	Within ±0.1 %/ $^\circ\text{C}$ @ $I_{fn}$			
Thermal Drift of Zero Current Offset	-	mV/ $^\circ\text{C}$	Within ±0.4 mV/ $^\circ\text{C}$ @ $I_{fn}$			
Dielectric Strength	-	V	AC2.5KV X 60 sec			
Isolation Resistance @ 1000 VDC	$R_{IS}$	M $\Omega$	>1000 M $\Omega$			
Operating Temperature	$T_a$	$^\circ\text{C}$	-15 $^\circ\text{C}$ to 80 $^\circ\text{C}$			
Storage Temperature	$T_s$	$^\circ\text{C}$	-20 $^\circ\text{C}$ to 85 $^\circ\text{C}$			
Mass	W	g	10 g			

# Topstek Current Transducer THX20A .. THX50A

## Appearance, dimensions and pin identification

www.DataSheet4U.com

All dimensions in mm  $\pm 0.1$ , holes  $-0, +0.2$  except otherwise noted.

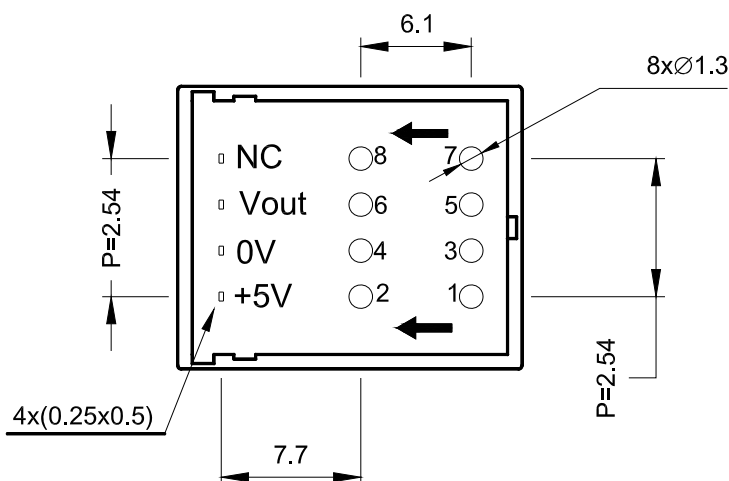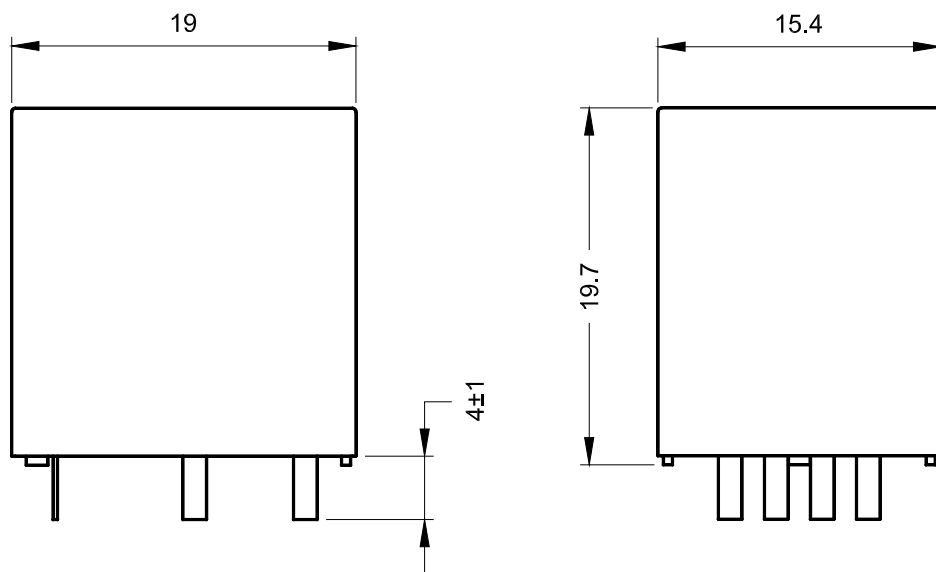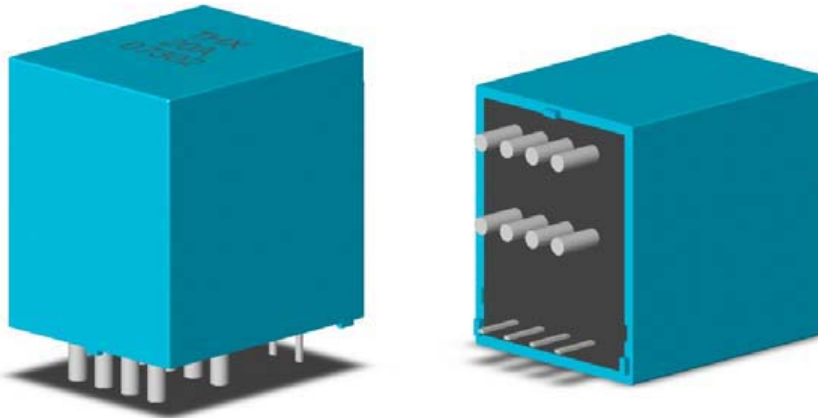

Primary Current Input Pins	I+	I-
pin	1,3,5,7	2,4,6,8