

Micro Commercial Components




Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311 Phone: (818) 701-4933 Fax: (818) 701-4939

- High DC Current Gain : h_{FE} =1000 @ V_{CE}=4.0V, I_C=1.0A(Min.)
- Low Collector-Emitter Saturation Voltage
- Complementary to TIP110/111/112
- Lead Free Finish/RoHS Compliant (Note1) ("P" Suffix designates RoHS Compliant. See ordering information)
- Epoxy meets UL 94 V-0 flammability rating
- Moisure Sensitivity Level 1 Maximum Ratings

Symbol	Rating		Ratin	g	Unit
V _{CEO}	Collector-Emitter Voltage				
	_	TIP115	60		
		TIP116	80		V
		TIP117	100		
V _{CBO}	Collector-Base Voltage				
	-	TIP115	60		
		TIP116	80		V
		TIP117	100		
V _{EBO}	Emitter-Base Voltage		5.0		V
	Collector Current (DC)		2.0		А
I _{CP}	Collector Current (Pulse)	or Current (Pulse) 4.0			А
I _B	Base Current (DC)	50			mA
5	Collector Dissipation @T _A =2	25°C	2.0		W
Pc	Collector Dissipation @Tc=2	25 ^o C	50		W
TJ,	Junction Temperature		-55 to +150		°C
T _{STG}	Storage Temperature		-55 to +	150	°C
Electrica	I Characteristics@2	5°C Unles	s Otherw	ise Sp	ecified
Symbl	Parameter		Min	Max	Units
OFF CHARA	CTERISTICS				•
V _{CEO(SUS)}	Collector-Emitter Sustaining	Voltage			
CEO(SUS)	$(I_{c}=30 \text{ mAdc}, I_{B}=0)$	TIP115	60		
	(1 C-com (ac, B-c)	TIP116	80		Vdc
		TIP117	100		
CEO	Collector Cut-off Current				
	(V _{CE} =30Vdc, I _B =0)	TIP115		2.0	
	(V _{CE} =40Vdc, I _B =0)	TIP116		2.0	mAdc
	$(V_{CE}=50Vdc, I_{B}=0)$	TIP117		2.0	
І _{сво}	Collector Cut-off Current				
	(V _{CB} =60Vdc, I _E =0)	TIP115		1.0	۳۸da
	(V _{CB} =60Vdc, l _E =0) (V _{CB} =80Vdc, l _E =0)	TIP115 TIP116		1.0 1.0	mAdc
				-	mAdc
Ево	(V _{CB} =80Vdc, <u>k</u> =0)	TIP116		1.0	mAdc mAdc
I _{EBO}	(V _{CB} =80Vdc, <u>↓</u> =0) (V _{CB} =100Vdc, l _E =0)	TIP116		1.0 1.0	
-	(V _{CB} =80Vdc, <u>k</u> =0) (V _{CB} =100Vdc, l _E =0) Emitter Cut-off Current	TIP116		1.0 1.0	
ON CHARAC	$(V_{CB}=80Vdc, I_{E}=0)$ $(V_{CB}=100Vdc, I_{E}=0)$ Emitter Cut-off Current $(V_{BE}=5.0Vdc, I_{C}=0)$ CTERISTICS DC Current Gain	TIP116		1.0 1.0	
-	(V _{CB} =80Vdc, I _E =0) (V _{CB} =100Vdc, I _E =0) Emitter Cut-off Current (V _{BE} =5.0Vdc, I _C =0) CTERISTICS	TIP116		1.0 1.0	
ON CHARAC	$(V_{CB}=80Vdc, I_{E}=0)$ $(V_{CB}=100Vdc, I_{E}=0)$ Emitter Cut-off Current $(V_{BE}=5.0Vdc, I_{C}=0)$ CTERISTICS DC Current Gain $(I_{C}=1.0Adc, V_{CE}=4.0Vdc)$ $(I_{E}=2.0Adc, V_{CE}=4.0Vdc)$	TIP116 TIP117		1.0 1.0	mAdc
ON CHARAC	$\begin{array}{l} (V_{CB}=80Vdc, I_{E}=0)\\ (V_{CB}=100Vdc, I_{E}=0)\\ \hline \\ \text{Emitter Cut-off Current}\\ (V_{BE}=5.0Vdc, I_{C}=0)\\ \hline \\ \text{CTERISTICS}\\ \hline \\ \text{DC Current Gain}\\ (I_{C}=1.0Adc, V_{CE}=4.0Vdc)\\ \hline \\ (I_{E}=2.0Adc, V_{CE}=4.0Vdc)\\ \hline \\ \hline \\ \text{Collector-Emitter Saturation} \end{array}$	TIP116 TIP117	 1000	1.0 1.0	
ON CHARAO h _{FE(1)} V _{CE(sat)}	$(V_{CB}=80Vdc, I_{E}=0)$ $(V_{CB}=100Vdc, I_{E}=0)$ Emitter Cut-off Current $(V_{BE}=5.0Vdc, I_{C}=0)$ CTERISTICS DC Current Gain $(I_{C}=1.0Adc, V_{CE}=4.0Vdc)$ $(I_{E}=2.0Adc, V_{CE}=4.0Vdc)$	TIP116 TIP117	 1000 500	1.0 1.0 2.0	mAdc Vdc
ON CHARAC	$\begin{array}{l} (V_{CB}=80Vdc, I_{E}=0)\\ (V_{CB}=100Vdc, I_{E}=0)\\ \hline \\ \text{Emitter Cut-off Current}\\ (V_{BE}=5.0Vdc, I_{C}=0)\\ \hline \\ \text{CTERISTICS}\\ \hline \\ \text{DC Current Gain}\\ (I_{C}=1.0Adc, V_{CE}=4.0Vdc)\\ \hline \\ (I_{E}=2.0Adc, V_{CE}=4.0Vdc)\\ \hline \\ \hline \\ \text{Collector-Emitter Saturation} \end{array}$	TIP116 TIP117	 1000 500	1.0 1.0 2.0	mAdc
ON CHARAO h _{FE(1)} V _{CE(sat)} V _{BE(ON)}	$ (V_{CB}=80Vdc, I_{E}=0) \\ (V_{CB}=100Vdc, I_{E}=0) \\ Emitter Cut-off Current \\ (V_{BE}=5.0Vdc, I_{C}=0) \\ CTERISTICS \\ DC Current Gain \\ (I_{C}=1.0Adc, V_{CE}=4.0Vdc) \\ (I_{E}=2.0Adc, V_{CE}=4.0Vdc) \\ Collector-Emitter Saturation \\ (I_{E}=2.0Adc, I_{B}=8.0mAdc) \\ Base-Emitter On Voltage \\ (I_{C}=2.0Adc, V_{CE}=4.0Adc) \\ $	TIP116 TIP117	 1000 500 	1.0 1.0 2.0 2.5	mAdc Vdc
ON CHARAO h _{FE(1)} V _{CE(sat)}	$\begin{array}{l} (V_{CB}=80Vdc, I_{E}=0)\\ (V_{CB}=100Vdc, I_{E}=0)\\ \hline \\ \\ \hline \\$	TIP116 TIP117 Voltage	 1000 500 	1.0 1.0 2.0 2.5	mAdc Vdc

TIP115 TIP116 TIP117

PNP Epitaxial **Silicon Darlington Transistors**

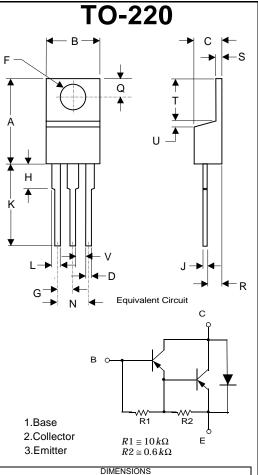

DIMENSIONS						
	INCHES		ММ			
DIM	MIN	MAX	MIN	MAX	NOTE	
A	.595	.620	15.11	15.75		
В	.380	.405	9.65	10.29		
С	.160	.190	4.06	4.82		
D	.025	.035	0.64	0.89		
F	.142	.147	3.61	3.73		
G	.190	.210	4.83	5.33		
Н	.110	.130	2.79	3.30		
J	.018	.025	0.46	0.64		
K	.500	.562	12.70	14.27		
L	.045	.060	1.14	1.52		
Q	.100	.120	2.54	3.04		
R	.080	.110	2.04	2.79		
S	.045	.055	1.14	1.39		
Т	.235	.255	5.97	6.48		
U		.050		1.27		

Notes:1.High Temperature Solder Exemption Applied, see EU Directive Annex 7.

www.mccsemi.com



Ordering Information :

Device	Packing
Part Number-BP	Bulk; 1Kpcs/Box

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp*. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp*. and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com