

TM070SDH01 MODEL NO. :

ISSUED DATE: 2008-11-19

Ver 2.1 VERSION

> □ Preliminary Specification **■Final Product Specification**

Customer:	
Gustomer.	

Approved by	Notes		

SHANGHAI TIANMA Confirmed:

Prepared by	Checked by	Approved by
石园沙2 2008 11.24		BB 28'11/2X

This technical specification is subjected to change without notice



Table of Contents

COV	/ersneet	1
Tab	le of Contents	2
	cord of Revision	
	General Specifications	
	Input/Output Terminals	
3	Absolute Maximum Ratings	7
4	Electrical Characteristics	8
5	Timing Chart	. 12
6	Optical Characteristics	
7	Environmental / Reliability Tests	. 19
8	Mechanical Drawing	20
9	Packing Drawing	
10	Precautions For Use of LCD Modules	



Record of Revision

Rev	Issued Date	Description	Editor
1.0	2008-07-10	Preliminary Release	Enhao Li
1.1	2008-08-22	Change the Pin's definition of FPC and the length of B/L power cord	Enhao Li
1.2	2008-10-16	Add Block Diagram Update Power Consumption	Enhao Li
2.0	2008-11-12	Final Product Specification	Enhao Li
2.1	2008-11-19	Update Module Name From TS070SAATD01-00 To TM070SDH01	Enhao Li



1 General Specifications

Matching connector (BE P-TWD) P/N: AF 730L-A2G1T

	Feature	Spec	
	Size	7 inch	
	Resolution	800(RGB) X 600	
	Interface	Digital 18 bits	
	Color Depth	262k	
	Technology Type	a-Si	
Display Spec.	Pixel Pitch (mm)	0.176 X 0.176	
	Pixel Configuration	R.G.B. Vertical Stripe	
	Display Mode	TM with Normally White	
	Surface Treatment(Up Polarizer)	Anti-Glare(3H)	
	Viewing Direction	12 o'clock	
	Gray Scale Inversion Direction	6 o'clock	
	LCM (W x H x D) (mm)	155.50 X 118.70 X 5.70	
Mashaniaal	Active Area(mm)	141.00 X 105.75	
Mechanical Characteristics	With /Without TSP	Without TSP	
	Weight (g)	183.22	
	LED Numbers	18 LEDs	

Note 1: Viewing direction for best image quality is different from TFT definition, there is a 180 degree shift.

Note 2: Requirements on Environmental Protection: ROHS

Note 3: LCM weight tolerance: +/- 5%



2 Input/Output Terminals

1 POL I Polarity selection 2 STVD I/O Vertical start pulse input when U/D= H N 3 OEV I Output enable 4 CKV I Vertical clock	nment
2 STVD I/O Vertical start pulse input when U/D= H N 3 OEV I Output enable 4 CKV I Vertical clock 5 STVU I/O Vertical start pulse input when U/D= L N 6 GND P Power ground 7 EDGSL I Select rising edge or falling edge 8 VCC P Power supply for digital circuit 9 V9 I Gamma voltage level 9 10 VGL P Gate OFF voltage 11 V2 I Gamma voltage level 2 12 VGH P Gate ON voltage 13 V6 I Gamma voltage level 6 14 U/D I Up/down selection 15 VCOM I Common voltage 16 GND P Power ground 17 AVDD P Power supply for analog circuit 18 V14 I Gamma voltage level 14 19 V11 I Gamma voltage level 14 19 V11 I Gamma voltage level 18 21 V5 I Gamma voltage level 5 22 V3 I Gamma voltage level 3 23 GND P Power ground	minent
3 OEV I Output enable 4 CKV I Vertical clock 5 STVU I/O Vertical start pulse input when U/D= L N 6 GND P Power ground 7 EDGSL I Select rising edge or falling edge 8 VCC P Power supply for digital circuit 9 V9 I Gamma voltage level 9 10 VGL P Gate OFF voltage 11 V2 I Gamma voltage level 2 12 VGH P Gate ON voltage 13 V6 I Gamma voltage level 6 14 U/D I Up/down selection 15 VCOM I Common voltage 16 GND P Power ground 17 AVDD P Power supply for analog circuit 18 V14 I Gamma voltage level 14 19 V11 I Gamma voltage level 11 20 V8 I Gamma voltage level 8 21 V5 I Gamma voltage level 5 22 V3 I Gamma voltage level 3 23 GND P Power ground	ote 1
4 CKV I Vertical clock 5 STVU I/O Vertical start pulse input when U/D= L N 6 GND P Power ground 7 EDGSL I Select rising edge or falling edge 8 VCC P Power supply for digital circuit 9 V9 I Gamma voltage level 9 10 VGL P Gate OFF voltage 11 V2 I Gamma voltage level 2 12 VGH P Gate ON voltage 13 V6 I Gamma voltage level 6 14 U/D I Up/down selection 15 VCOM I Common voltage 16 GND P Power ground 17 AVDD P Power supply for analog circuit 18 V14 I Gamma voltage level 14 19 V11 I Gamma voltage level 11 20 V8 I Gamma voltage level 8 21 V5 I Gamma voltage level 5 22 V3 I Gamma voltage level 3 23 GND P Power ground	OLG 1
5 STVU I/O Vertical start pulse input when U/D= L N 6 GND P Power ground 7 EDGSL I Select rising edge or falling edge 8 VCC P Power supply for digital circuit 9 V9 I Gamma voltage level 9 10 VGL P Gate OFF voltage 11 V2 I Gamma voltage level 2 12 VGH P Gate ON voltage 13 V6 I Gamma voltage level 6 14 U/D I Up/down selection 15 VCOM I Common voltage 16 GND P Power ground 17 AVDD P Power supply for analog circuit 18 V14 I Gamma voltage level 14 19 V11 I Gamma voltage level 14 19 V11 I Gamma voltage level 15 20 V8 I Gamma voltage level 5 21 V5 I Gamma voltage level 3 23 GND P Power ground	
6 GND P Power ground 7 EDGSL I Select rising edge or falling edge 8 VCC P Power supply for digital circuit 9 V9 I Gamma voltage level 9 10 VGL P Gate OFF voltage 11 V2 I Gamma voltage level 2 12 VGH P Gate ON voltage 13 V6 I Gamma voltage level 6 14 U/D I Up/down selection 15 VCOM I Common voltage 16 GND P Power ground 17 AVDD P Power supply for analog circuit 18 V14 I Gamma voltage level 14 19 V11 I Gamma voltage level 14 19 V11 I Gamma voltage level 8 21 V5 I Gamma voltage level 5 22 V3 I Gamma voltage level 3 23 GND P Power ground	ote 1
7 EDGSL I Select rising edge or falling edge 8 VCC P Power supply for digital circuit 9 V9 I Gamma voltage level 9 10 VGL P Gate OFF voltage 11 V2 I Gamma voltage level 2 12 VGH P Gate ON voltage 13 V6 I Gamma voltage level 6 14 U/D I Up/down selection 15 VCOM I Common voltage 16 GND P Power ground 17 AVDD P Power supply for analog circuit 18 V14 I Gamma voltage level 14 19 V11 I Gamma voltage level 11 20 V8 I Gamma voltage level 8 21 V5 I Gamma voltage level 5 22 V3 I Gamma voltage level 3 23 GND P Power ground	ole i
8 VCC P Power supply for digital circuit 9 V9 I Gamma voltage level 9 10 VGL P Gate OFF voltage 11 V2 I Gamma voltage level 2 12 VGH P Gate ON voltage 13 V6 I Gamma voltage level 6 14 U/D I Up/down selection 15 VCOM I Common voltage 16 GND P Power ground 17 AVDD P Power supply for analog circuit 18 V14 I Gamma voltage level 14 19 V11 I Gamma voltage level 11 20 V8 I Gamma voltage level 8 21 V5 I Gamma voltage level 5 22 V3 I Gamma voltage level 3 23 GND P Power ground	
9 V9 I Gamma voltage level 9 10 VGL P Gate OFF voltage 11 V2 I Gamma voltage level 2 12 VGH P Gate ON voltage 13 V6 I Gamma voltage level 6 14 U/D I Up/down selection 15 VCOM I Common voltage 16 GND P Power ground 17 AVDD P Power supply for analog circuit 18 V14 I Gamma voltage level 14 19 V11 I Gamma voltage level 11 20 V8 I Gamma voltage level 8 21 V5 I Gamma voltage level 5 22 V3 I Gamma voltage level 3 23 GND P Power ground	
10 VGL P Gate OFF voltage 11 V2 I Gamma voltage level 2 12 VGH P Gate ON voltage 13 V6 I Gamma voltage level 6 14 U/D I Up/down selection 15 VCOM I Common voltage 16 GND P Power ground 17 AVDD P Power supply for analog circuit 18 V14 I Gamma voltage level 14 19 V11 I Gamma voltage level 11 20 V8 I Gamma voltage level 8 21 V5 I Gamma voltage level 5 22 V3 I Gamma voltage level 3 23 GND P Power ground	
11 V2 I Gamma voltage level 2 12 VGH P Gate ON voltage 13 V6 I Gamma voltage level 6 14 U/D I Up/down selection 15 VCOM I Common voltage 16 GND P Power ground 17 AVDD P Power supply for analog circuit 18 V14 I Gamma voltage level 14 19 V11 I Gamma voltage level 11 20 V8 I Gamma voltage level 8 21 V5 I Gamma voltage level 5 22 V3 I Gamma voltage level 3 23 GND P Power ground	
12 VGH P Gate ON voltage 13 V6 I Gamma voltage level 6 14 U/D I Up/down selection 15 VCOM I Common voltage 16 GND P Power ground 17 AVDD P Power supply for analog circuit 18 V14 I Gamma voltage level 14 19 V11 I Gamma voltage level 11 20 V8 I Gamma voltage level 8 21 V5 I Gamma voltage level 5 22 V3 I Gamma voltage level 3 23 GND P Power ground	
13 V6 I Gamma voltage level 6 14 U/D I Up/down selection 15 VCOM I Common voltage 16 GND P Power ground 17 AVDD P Power supply for analog circuit 18 V14 I Gamma voltage level 14 19 V11 I Gamma voltage level 11 20 V8 I Gamma voltage level 8 21 V5 I Gamma voltage level 5 22 V3 I Gamma voltage level 3 23 GND P Power ground	
14U/DIUp/down selection15VCOMICommon voltage16GNDPPower ground17AVDDPPower supply for analog circuit18V14IGamma voltage level 1419V11IGamma voltage level 1120V8IGamma voltage level 821V5IGamma voltage level 522V3IGamma voltage level 323GNDPPower ground	
15 VCOM I Common voltage 16 GND P Power ground 17 AVDD P Power supply for analog circuit 18 V14 I Gamma voltage level 14 19 V11 I Gamma voltage level 11 20 V8 I Gamma voltage level 8 21 V5 I Gamma voltage level 5 22 V3 I Gamma voltage level 3 23 GND P Power ground	
16 GND P Power ground 17 AVDD P Power supply for analog circuit 18 V14 I Gamma voltage level 14 19 V11 I Gamma voltage level 11 20 V8 I Gamma voltage level 8 21 V5 I Gamma voltage level 5 22 V3 I Gamma voltage level 3 23 GND P Power ground	
17 AVDD P Power supply for analog circuit 18 V14 I Gamma voltage level 14 19 V11 I Gamma voltage level 11 20 V8 I Gamma voltage level 8 21 V5 I Gamma voltage level 5 22 V3 I Gamma voltage level 3 23 GND P Power ground	
18 V14 I Gamma voltage level 14 19 V11 I Gamma voltage level 11 20 V8 I Gamma voltage level 8 21 V5 I Gamma voltage level 5 22 V3 I Gamma voltage level 3 23 GND P Power ground	
19 V11 I Gamma voltage level 11 20 V8 I Gamma voltage level 8 21 V5 I Gamma voltage level 5 22 V3 I Gamma voltage level 3 23 GND P Power ground	
20 V8 I Gamma voltage level 8 21 V5 I Gamma voltage level 5 22 V3 I Gamma voltage level 3 23 GND P Power ground	
21 V5 I Gamma voltage level 5 22 V3 I Gamma voltage level 3 23 GND P Power ground	
22 V3 I Gamma voltage level 3 23 GND P Power ground	
23 GND P Power ground	
74 BO	
25 R4 I Red data	
26 R3 I Red data	
27 R2 I Red data	
28 R1 I Red data	
29 R0 I Red data(LSB)	
30 GND P Power ground	
31 GND P Power ground	
32 G5 I Green data(MSB)	
33 G4 I Green data	
34 G3 I Green data	
35 G2 I Green data	
36 G1 I Green data	
37 G0 I Green data(LSB)	
	ote 1
39 REV I Control signal are inverted or not	
40 GND P Power ground	
41 DCLK I Sample clock	
42 VCC P Power supply for digital circuit	
	ote 1
Latches the polarity of outputs and	
switches the new data to outputs	
45 B5 I Blue data (MSB)	



SHANGHAI TIANMA MICRO-ELECTRONICS

TM070SDH01 Ver 2.1

46	B4	Blue data	
47	B3	I	Blue data
48	B2	I	Blue data
49	B1		Blue data
50	B0	I	Blue data (LSB)
51	R/L	I	Right/ left selection
52	V1	I	Gamma voltage level 1
53	V4		Gamma voltage level 4
54	V7		Gamma voltage level 7
55	V10	I	Gamma voltage level 10
56	V12	I	Gamma voltage level 12
57	V13		Gamma voltage level 13
58	AVDD	Р	Power supply for analog circuit
59	GND	Р	Power ground
60	VCOM		Common voltage

Note 1:

Set	Setting		Out State fo	r Start Pu	lse	Scanning Direction		
U/D	R/L	STVD	STVU	STHR	STHL	Scalling Direction		
GND	VCC	0	I		0	UP to down, left to right		
VCC	GND	I	0	0	I	Down to up, right to left		
GND	GND	0	I	0	I	UP to down, right to left		
VCC	VCC	I	0	İ	0	Down to up, left to right		

Note 2: I/O definition:

I----Input O---Output P----Power/Ground

3 Absolute Maximum Ratings

Ta = 25°C

Item	Symbol	Min	Max	Unit	Remark
Logic Supply Voltage	VCC	-0.3	5.0	V	
Analog Supply Voltage	AVDD	-0.3	15	V	
Positive power for scan driver	VGH	-0.3	42.0	V	
Negative power for scan driver	VGL	-20	0.3	V	
Voltage range of VGH- VGL	VGH- VGL	-0.3	40.0	V	
Back Light Forward Current	I _{LED}		25	mA	For each LED
Commo voltago	V1~V7	0.4 AVDD	AVDD+0.3	V	Note 1
Gamma voltage	V8~V14	-0.3	0.6 AVDD	V	Note 1
Operating Temperature	T _{OPR}	-20	70	$^{\circ}$	
Storage Temperature	T_{STG}	-30	80	$^{\circ}$	

Note 1: AVDD-0.1 \geqslant V1 \geqslant V2 \geqslant V3 \geqslant V4 \geqslant V5 \geqslant V6 \geqslant V7 \geqslant V8 \geqslant V9 \geqslant V10 \geqslant V11 \geqslant V12 \geqslant V13 \geqslant V14 \geqslant GND+0.1

4 Electrical Characteristics

4.1 Driving TFT LCD Panel

GND=0V, Ta=25°C

Ite	m	Symbol	Min	Тур	Max	Unit	Remark
Logic Supply Voltage		VCC	3.0	3.3	3.6	>	
_	Analog Supply Voltage		-	10.0	-	V	
	oower for driver	VGH	14.5	15	15.5		
_	power for driver	VGL	-10.5	-10	-9.5		
VC	OM	VCOM	-	4.05	-	٧	
Input Signal	Low Level	V_{IL}	0	-	0.2xVCC	V	R0~5,G0~5,B0~5,POL, STVD,OEV,CKV,STVU,
Voltage	High Level	V _{IH}	0.8xVCC	-	VCC	V	EDGSL,U/D,STHL,REV, DCLK,STHR,LD,R/L
Output	Low Level	V_{OL}	0	-	0.2xVCC	>	STVD,STVU,STHL,STHR
Signal Voltage	High Level	V_{OH}	0.8xVCC	ı	VCC	>	31 VD,31 VO,3111E,31111X
	•		-	0.217	-	mA	
(Pane	I+LSI)	I_{GL}	-	0.542	-	mA	
Power Co	nsumption	I _{CC}	-	3.577	-	mA	
		I _{AVDD}	-	35.788	-	mA	

Note: It is important that VCC & VGL should be applied before VGH.

4.2 Gamma Correction Voltage

Parameter	Symbol	Min	Тур	Max	Unit	Remark
	V1	-	9.800	-	V	
	V2	-	9.704	-	V	
	V3	-	7.866	-	V	
	V4	-	7.365	-	V	
Gamma	V5	-	6.980	-	V	
Correction	V6	-	6.287	-	V	
reference	V7	-	5.450	-	V	
Voltage	V8	-	4.550	-	V	
V1~V14	V9	-	3.713	-	V	
	V10	-	3.020	-	V	
	V11	-	2.635	-	V	
	V12	-	2.134	-	V	
	V13	-	0.296	-	V	
	V14	-	0.200	-	V	



SHANGHAI TIANMA MICRO-ELECTRONICS


TM070SDH01 Ver 2.1

4.3 Driving Backlight

Ta=25°C

Item	Symbol	Min	Тур	Max	Unit	Remark
Forward Current	I _F	-	20	-	mA	Note 1
Forward Current Voltage	V _F	=	9.6	-	V	Note 1
Backlight Power Consumption	W_{BL}	-	1152	-	mW	Note 1


Note 1: The LED driving condition is defined for all LED module (3 LED Serial, 6LED Parallel).

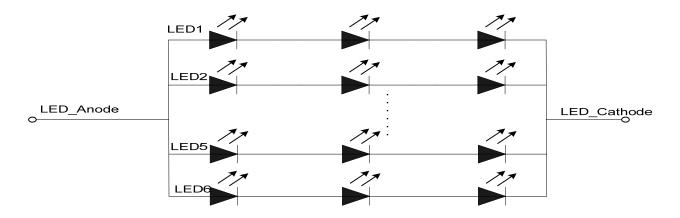


Note 2: One LED: IF =20 mA, VF =3.2V

Note 3: The Minimum Life of LED: 20,000 hours


4.4 Power Sequence 4.4.1 Power on

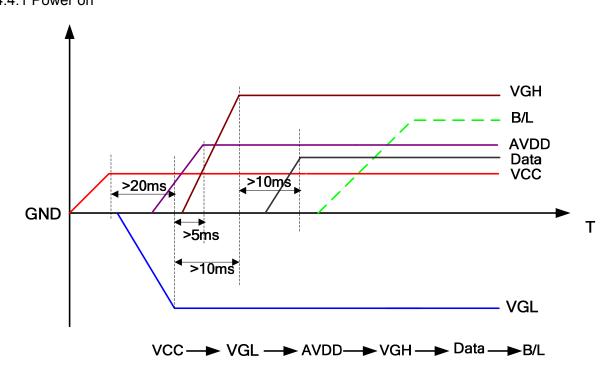



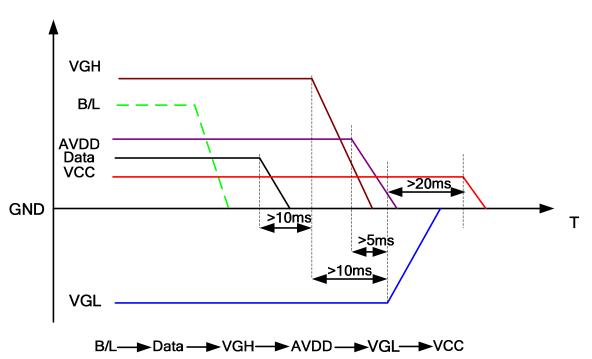

4.5 Block diagram

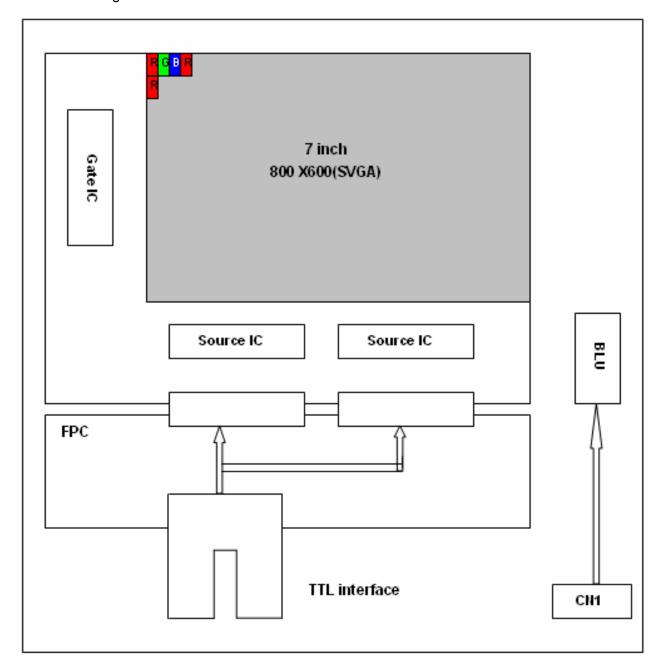



SHANGHAI TIANMA MICRO-ELECTRONICS


Timing Chart

5.1.1. Clock and data input timing diagram1 (VCC=3.3V,AVDD=10.0V, GND=AGND=0V,Ta=25℃)


Parameter	Symbol	Min	Тур	Max	Unit	Conditions
DCLK frequency	Fclk	-	50	55	MHz	EDGSL=0
DOLK frequency		-	25	27.5	MHz	EDGSL=1
DCLK cycle	Tcph	18	20	-	ns	EDGSL=0
	•	36	40	-	ns	EDGSL=1
DCLK pulse width	Tcw	40%	-	60%	Tcph	
Data set-up time	Tsu	4	-	-	ns	
Data hold time	Thd	2	-	-	ns	
Time that the last data to LD	Tld	1	-	-	Tcph	
Pulse width of LD	Twld	2	-	-	Tcph	
Time that LD to STHL/R	Tlds	5	-	-	Tcph	
POL set-up time	Tpsu	6	-	-	ns	POL to LD
POL hold time	Tphd	6	-	-	ns	POL to LD
Horizontal display timing range	Tdh	-	800	-	Tcph	
Horizontal timing range	Th	-	1056	-	Tcph	
CKV pulse width	Pwclk	500	-	-	ns	High & Low
OEV pulse width	Twcl	1	-	-	us	
STVD/U set-up time	Tgsu	200	-	-	ns	
STVD/U hold time	Tghd	300	-	-	ns	
Horizonta lines per field	Tv	628	635	650	Tdh	
Vertical display timing range	Tvd	-	600	-	Tdh	

5.1.2. Clock and data input timing diagram1 (VCC=3.3V,AVDD=10.0V, GND=AGND=0V,Ta=25℃)


<< EDGSL="0" >>

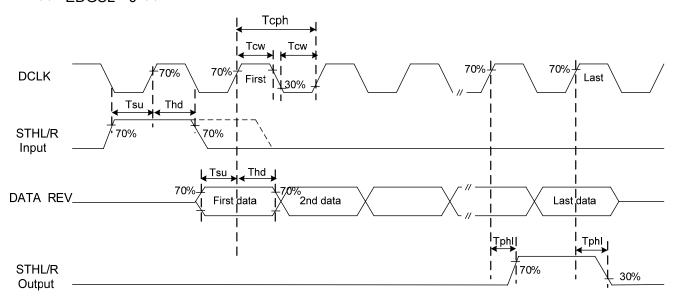



<< EDGSL="1" >>

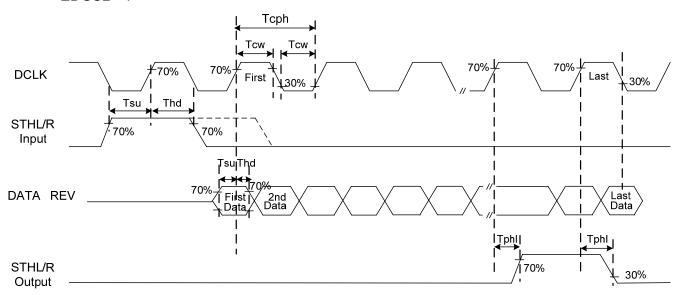


5.1.3. Clock and data input timing diagram2

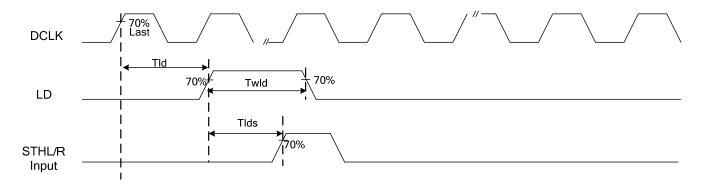

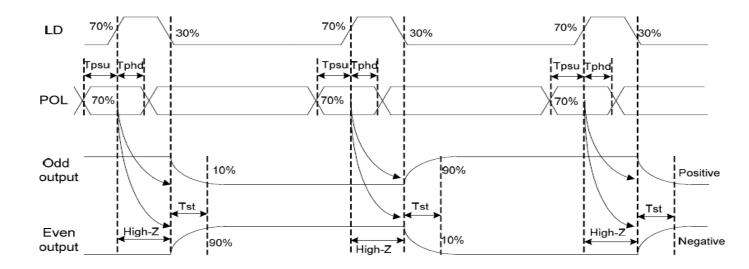

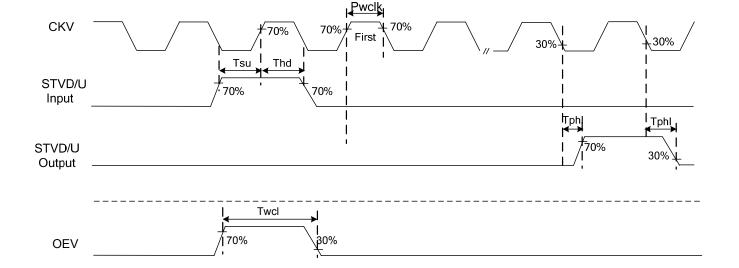



Optical Characteristics

6.1 Optical Specification

Ta=25°C


Item		Symbol	Condition	Min	Тур	Max	Unit	Remark
View Angles		θТ	-CR≧10	35	45	-	Degree	Note2,3
		θВ		55	65	-		
		θL		55	65			
		θR		55	65	-		
Contrast Ratio)	CR	θ=0°	250	400	-		Note 3
Posnonso Tin	10	Ton	25℃		25	50		Note 4
Response Time		Toff	25 C	-	25	50	ms	Note 4
	White	Х	Backlight is on	0.260	0.310	0.340		Note 1,5
		у		0.287	0.337	0.387		
	Red	Х		0.536	0.568	0.636		
Chromaticity		у		0.297	0.347	0.397		
Omomaticity	Green	х		0.286	0.336	0.386		
		у		0.524	0.574	0.624		
	Blue	х		0.090	0.140	0.190		
		у		0.074	0.124	0.174		
Uniformity		U		70	80	_	%	Note 6
NTSC		-		45	50	-	%	Note 5
Luminance		L		160	200	-	cd/m ²	Note 7

Test Conditions:

- 1. The ambient temperature is 25° C.
- 2. The test systems refer to Note 1 and Note 2.

Note 1: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 5 minutes operation, the optical properties are measured at the center point of the LCD screen. All input terminals LCD panel must be ground when measuring the center area of the panel.

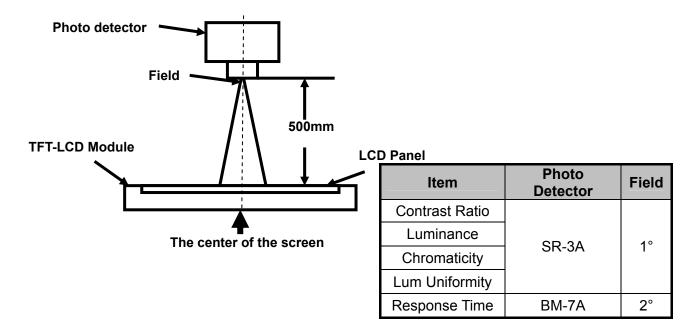

Note 2: Definition of viewing angle range and measurement system. viewing angle is measured at the center point of the LCD by CONOSCOPE(ergo-80).

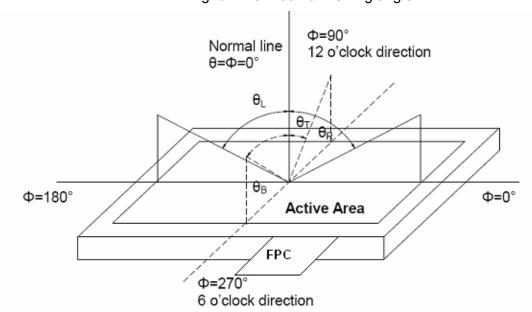


Fig. 6.1 Definition of viewing angle

Note 3: Definition of contrast ratio

 $Contrast ratio (CR) = \frac{Luminance measured when LCD is on the "White" state}{Luminance measured when LCD is on the "Black" state}$


"White state ": The state is that the LCD should driven by Vwhite.

"Black state": The state is that the LCD should driven by Vblack.

Vwhite: To be determined Vblack: To be determined.

Note 4: Definition of Response time

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time (TON) is the time between photo detector output intensity changed from 90% to 10%. And fall time (TOFF) is the time between photo detector output intensity changed from 10% to 90%.

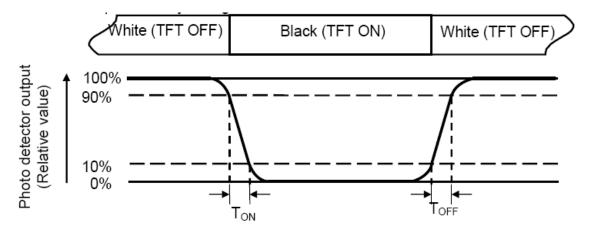

Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note 6: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer Fig. 2). Every measuring point is placed at the center of each measuring area.

Luminance Uniformity(U) = Lmin/Lmax

L----- Active area length W----- Active area width

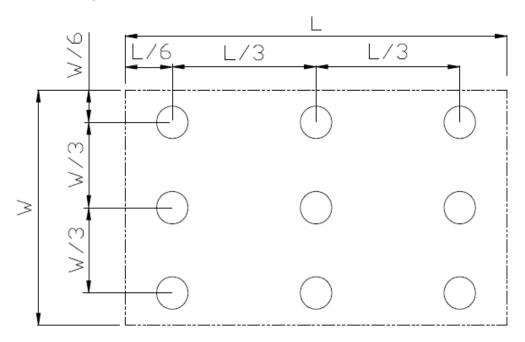


Fig. 6.2 Definition of uniformity

Lmax: The measured maximum luminance of all measurement position.

Lmin: The measured minimum luminance of all measurement position.

Note 7: Definition of Luminance:

Measure the luminance of white state at center point.




7 Environmental / Reliability Tests

No	Test Item	Condition	Remark
1	High Temperature	Ts=+70℃, 240hrs	Note1
	Operation		IEC60068-2-2,GB2423.2—89
2	Low Temperature	Ta=-20℃, 240hrs	IEC60068-2-1
	Operation		GB2423.1—89
	High Temperature	Ta=+80°C, 240hrs	IEC60068-2-2,
3	Storage		GB2423.2—89
	(non-operation)	T 00% 040	UECC0000 0 4
4	Low Temperature	Ta=-30℃, 240hrs	IEC60068-2-1 GB2423.1—89
4	Storage (non-operation)		GB2423.1—09
	High Temperature &	Ta = +60℃,90% RH max,240	Note2
5	High Humidity	hours	IEC60068-2-3,
ľ	Operation	nours	GB/T2423.3—2006
	•	-30°C 30 min~+80°C 30 min,	Start with cold temperature, end
6	Thermal Shock	Change time:5min, 100 Cycle	with high temperature
	(non-operation)	enange amerenan, ree eyere	IEC60068-2-14,GB2423.22—87
7	Electro Static	\pm 2KV,Human Body Mode,	IEC61000-4-2
′	Discharge (operation)	100pF/1500 Ω	GB/T17626.2—1998
		Sine Wave Frequency	
	Vibration (non-operation)	range:10~55Hz, Stroke:1.5mm	IEC60068-2-6
8		Sweep:10Hz~55Hz~10Hz 2 hours	GB/T2423.10—1995
		for each direction of X.Y.Z.(6 hours	1000
	0	for total)	UE 000000 0 07
9	Shock	100G 6ms, ±X,±Y,±Z 3times for	IEC60068-2-27
		each direction	GB/T2423.5—1995
10		Height:80 cm,1 corner, 3 edges, 6 surfaces	IEC60068-2-32 GB/2423.8—1995
	-	Random Vibration:	IEC60068-2-34
	Package Vibration	0.015G*G/Hz for 5-200Hz,	
11		-6dB/Octave from 200-500Hz	
l	Test	2 hours for each direction of X,Y,Z	
		(6 hours for total)	

Note1: Ts is the temperature of panel's surface.


Note2: Ta is the ambient temperature of samples.

Mechanical Drawing

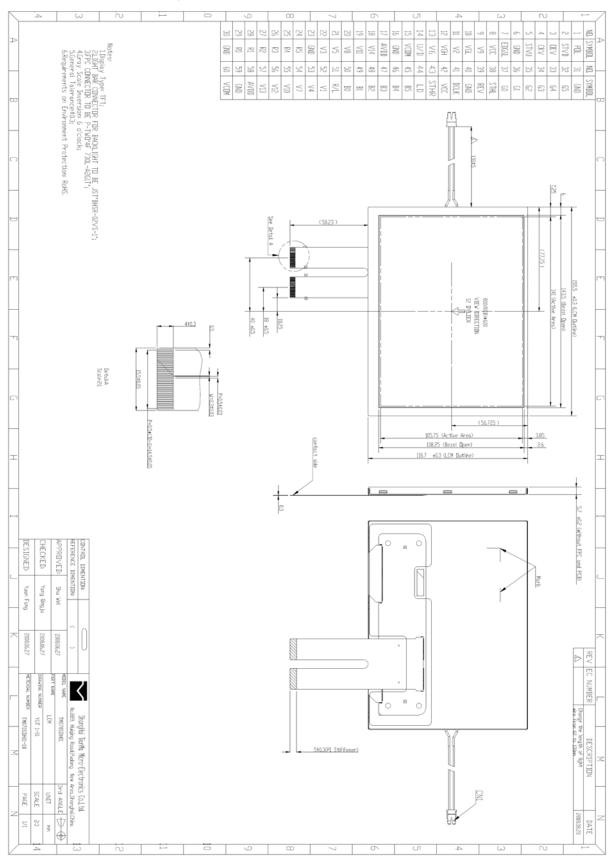

9 Packing Drawing

No	Item	Model (Material)	Dimensions(mm)	Unit Weight(Kg)	Quantity	Remark
1	LCM module	TM070SDH01	155.5x118.7x5.70	0.18322	50	
2	Partition_1	Corrugated Paper	513x333x215	2.0	1	
3.	Anti-Static Bag	PE	200x175	0.01	50	Anti-static
4	Dust-Proof Bag	PE	700x530	0.0600	1	
5	Partition_2	Corrugated Paper	505x332x4.00	0.1	2	
6	Corrugated Bar	Corrugated Paper	513x128x22.5	0.06	4	
7	Carton	Corrugated Paper	530x350x250	0.94	1	
8	Total weight(Kg)		13.00			

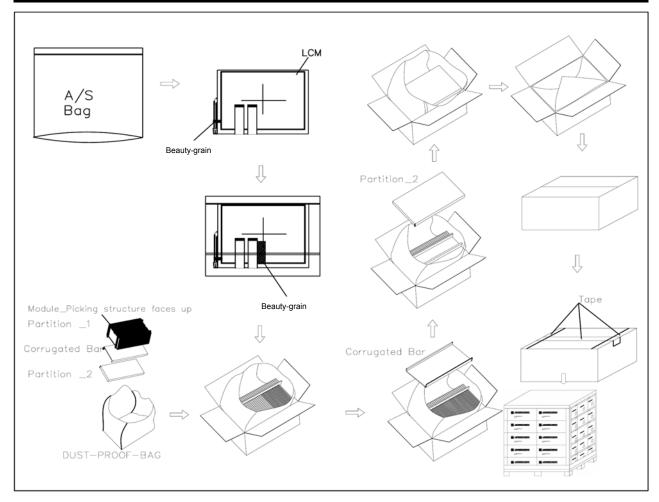



SHANGHAI TIANMA MICRO-ELECTRONICS

10 Precautions For Use of LCD Modules

- 10.1 Handling Precautions.
- 10.1.1. The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.
- 10.1.2. If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.
- 10.1.3. Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.
- 10.1.4. The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.
- 10.1.5. If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:
 - Isopropyl alcohol
 - Ethyl alcohol
- 10.1.6. Solvents other than those mentioned above may damage the polarizer. Especially, do not use the following:
 - Water
 - Ketone
 - Aromatic solvents
- 10.1.7. Do not attempt to disassemble the LCD Module.
- 10.1.8. If the logic circuit power is off, do not apply the input signals.
- 10.1.9. To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
- 10.2 Be sure to ground the body when handling the LCD Modules.
- 10.3 Tools required for assembly, such as soldering irons, must be properly ground.
- 10.4 To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.
- 10.5 The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.
- 10.6 Storage precautions
- 10.6.1. When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.
- 10.6.2. The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is:
- 10.7 Temperature : 0°C ~ 40°C Relatively humidity: ≤80%
- 10.7.1. The LCD modules should be stored in the room without acid, alkali and harmful gas.
- 10.7.2. Transportation Precautions
- 10.8 The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.